

Make the S650TX work for your unique needs. Outfit your unit with the variety of attachments offered by Vermeer. See [vermeer.com](http://vermeer.com) for a full listing.



**LOG GRAPPLE**

34" (86.4 cm) long  
42" (106.7 cm) wide  
285 lb (129.3 kg)  
3-position inline, 45° and 90°



**TOOTH BUCKET**

4 cu ft (.1 cu m)  
42" (106.7 cm) wide  
182 lb (82.6 kg)



**HARLEY POWER RAKE**

58" (147.3 cm) wide  
485 lb (220 kg)  
Swing: manual or hydraulic



**STANDARD TRENCHER**

Trenches: 4 - 6" (10.2 - 15.2 cm) wide  
24 - 48" (61 - 121.9 cm) deep

THE VERMEER DEALER NETWORK:  
RELIABLE SUPPORT, ALL OVER THE WORLD.



**Vermeer Asia Pacific**  
Singapore 608586  
Phone: +65 6516 9560  
Fax: +65 6515 9218

**Vermeer Corporation**  
Pella, Iowa 50219 U.S.A.  
Phone: (641) 628-3141  
Fax: (641) 621-7773  
International fax: +1 (641) 621-7730

**Vermeer Latin America**  
Valinhos, SP - Brazil  
Phone: +55 19 3881-3848  
Fax: +55 19 3881-3848, ext. 108

**Vermeer EMEA**  
(Europe, Middle East, Africa and CIS)  
the Netherlands  
Phone: +31 113 272700  
Fax: +31 113 272727

**Call toll-free 1-888-VERMEER**  
1-888-837-6337 (USA only)  
[www.vermeer.com](http://www.vermeer.com)

A GLOBAL INITIATIVE

Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Vermeer and the Vermeer logo are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. © 2011 Vermeer Corporation. All Rights Reserved.

S650TX MINI SKID STEER



S650TX MINI SKID STEER





Designed with the multitasker in mind.

The addition of the S650Tx mini skid steer to the Vermeer lineup offers do-it-yourselfers and contractors a versatile solution to their construction and landscaping needs.

Where's the difference? It began at the drawing board. After gathering customer feedback, Vermeer aimed to make the S650Tx the machine of choice – answering the power and capacity needs of customers worldwide.

The unit is equipped with a four pump system to increase both hydraulic and overall machine performance, powering attachments effectively and saving time. For those tough, heavy jobs, the S650Tx showcases a rated operating capacity of 660 lb (299.4 kg) and a tipping capacity of 1890 lb (857.3 kg).

The S650Tx features a class-leading tip and operating capacity as well as a lower operating track p.s.i.

And it's backed with a Vermeer dealer network deeply attuned to the needs of their customers, ready to go the extra mile with product expertise, parts knowledge and service support.







**1:** Steering made easy. Operator-controlled ground drive with a single pilot-operated joystick allows for a smooth range of motion.

**2:** Designed for safety. A dedicated spring-cushioned platform with operator presence system keeps users out of any mud or debris.

**3:** Ride in comfort. Cushions are positioned in front and on both sides of the operator, increasing comfort and support when navigating difficult terrain.

**4:** Attack a wide range of tasks with the same machine. A universal mounting plate makes hooking up a variety of attachments easy, giving the operator the versatility they need.

**5:** Machine maintenance made easier. Just lift the rear access panel for easy access to radiator, electrical system and hydraulic valves.

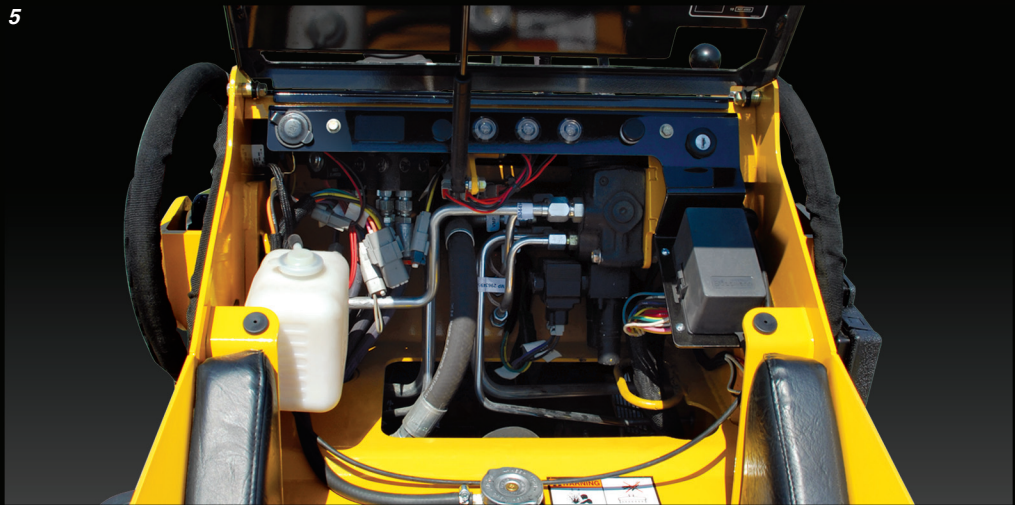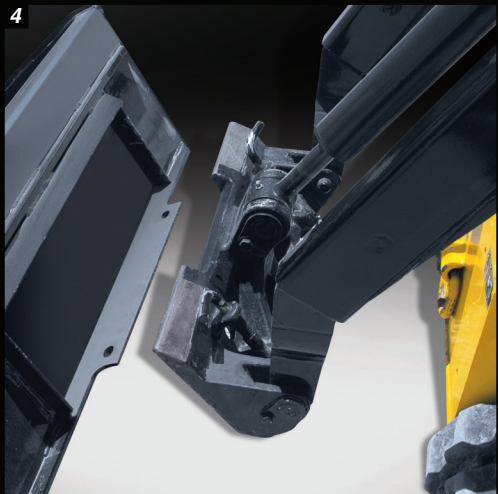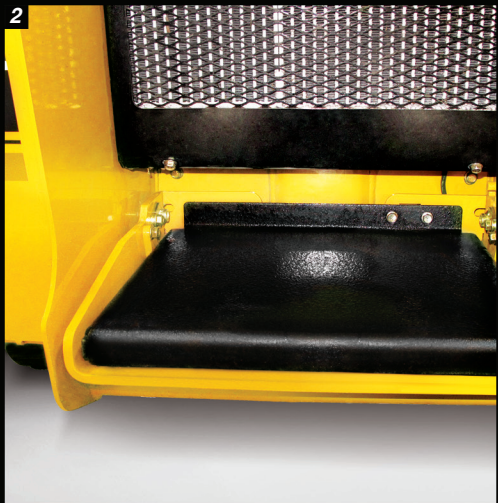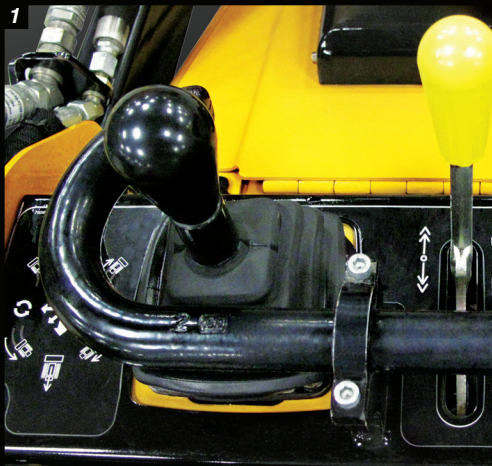

S650Tx SPECIFICATIONS

GENERAL

Design:	Ride-on/track-drive
Length with Standard Bucket:	91.5" (232.4 cm)
Length without Standard Bucket:	71.5" (181.6 cm)
Width with Standard Bucket:	42" (106.7 cm)
Width without Standard Bucket:	36" (91.4 cm)
Height:	57.75" (146.7 cm)
Height (to Hinge Pin):	80" (203.2 cm)
Ground Clearance:	4.5" (11.4 cm)
Weight (Standard Bucket, w/ 7" Tracks):	2690 lb (1220.2 kg)
Weight (Standard Bucket, w/ 9" Tracks):	2770 lb (1256.5 kg)
Weight (No Bucket, w/ 7" Tracks):	2560 lb (1161.2 kg)
Weight (No Bucket, w/ 9" Tracks):	2640 lb (1197.5 kg)

ENGINE

Model:	Kubota D1105-ET03
Fuel Type:	Diesel
Fuel Tank Capacity:	14.5 gal (54.9 L)
Gross Horsepower:	24.8 hp (18.5 kW)
Cooling System:	Liquid

TRACK PERFORMANCE

Rated Operating Capacity (SAE):	660 lb (299.4 kg)
Tipping Capacity (with 175 lb operator):	1890 lb (857.3 kg)
Travel Speed:	4.5 mph (7.2 km/h)
Ground Pressure (Narrow Tracks):	4.5 psi (0.3 bar)
Ground Pressure (Wide Tracks):	3.6 psi (0.2 bar)

OPERATIONAL

Steering:	Single, pilot-operated joystick
Lift:	Single, dual axis
curl:	Single, dual axis

HYDRAULIC SYSTEM

Hydraulic System Flow:	13.75 gpm (52 L/min)
Hydraulic System Pressure:	3025 psi (208.6 bar)
Tank Capacity:	11 gal (41.6 L)