

A62JRT

ARTICULATED BOOM LIFT



- High performance articulated boom lift
- Class-leading working envelope
- Powerful 4 wheel drive with live oscillating axle
- Ultra-tight turning radius
- Compact dimensions and zero tailswing

 **snorkel**
www.snorkellifts.com

ARTICULATED BOOM LIFT


A62JRT

DIMENSIONS	A62JRT
Max. working height	67 ft 8 in
Max. platform height	61 ft 8 in
Max. horizontal reach	36 ft 6 in
Clearance height at max. reach	29 ft 6 in
Platform size	96 in x 39 in
Overall width (A)	8 ft
Transport length	27 ft 10 in
Overall length (B)	28 ft 2.5 in
Stowed height (C)	8 ft 5 in
Ground clearance	14 in

PERFORMANCE	
Platform capacity (SWL)	500 lbs
Max. drive height	61 ft 8 in
Max. drive speed (stowed)	3.8 mph
Max. drive speed (elevated)	0.75 mph
Jib length	6 ft
Jib working arc	136°
Platform rotation	180°
Superstructure rotation	360° continuous
Tailswing	0 in
Gradeability	45 %
Inside turning radius	4 ft 6 in
Outside turning radius	15 ft 5 in
Tires	355/55 D625 foam filled lug
Controls	proportional drive, raise and slew
Drive system	4WD hydrostatic with oscillating axle

POWER	
Power source	Kubota 2403T diesel 59 HP

WEIGHT	
Weight	23,500 lbs

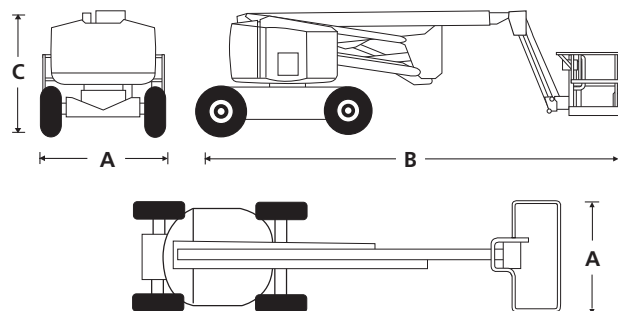


STANDARD FEATURES

- Oscillating axle
- Powerful hydrostatic 4 wheel drive
- Ultra-tight turning radius
- Swing-out engine tray
- Zero tailswing
- Hour meter
- Horn
- Power line to platform
- Three entry platform
- Multi-function proportional controls
- DC emergency operation
- ANSI compliant

OPTIONS

- Special paint colors
- Dual fuel power source
- Motion alarm
- Flashing amber light
- 72 in x 39 in platform
- 2 kW generator
- Glazier platform package
- On-board welder
- Hostile environment kit
- Lights package
- Cold weather start kit

WORKING ENVELOPE

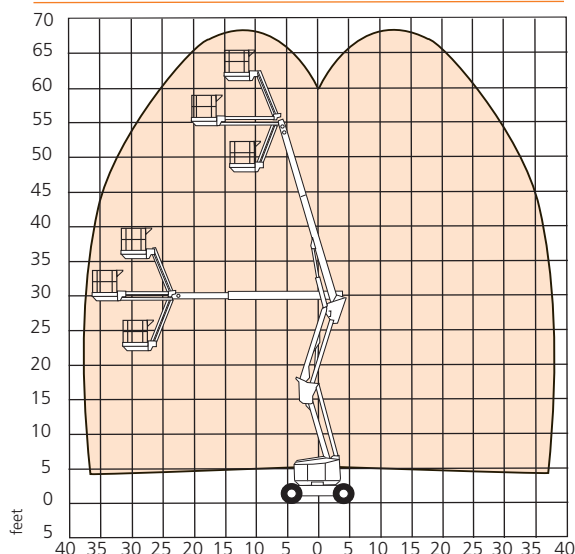

snorkel

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-free: 1 (800) 255-0317
Sales Fax: 1 (785) 989-3070
Parts Fax: 1 (785) 989-3077

www.snorkellifts.com