

# Adaptability and performance

- Optimised load rating
- Hydraulic control for standard accessories
- Tilt corrector as standard

### **Power and precision**

- > Standard hydrostatic transmission
- Simultaneous and proportional controls of all 4 movements of the boom with flow sharing

## Safety and reliability

- Standard rear axle locking
- Dangerous movements cut out switch



Placing height: 16.7m



Maximum lift capacity : 4000 kg







**TELEHANDLER** 



Placing height: 16.7m Maximum lift capacity: 4000 kg

#### **→** PERFORMANCES


Maximum lift capacity	4000 kg
Lift capacity to full height	2500 kg
Lift capacity at full reach	700 kg
Maximum fork height	16.7 m
Reach at maximum fork height	2.4 m
Maximum forward reach	12.85 m


#### → DIMENSIONS

	0.70
A Length	6.76 m
B Width	2.43 m
C Height	2.67 m
Wheelbase	2.9 m
■ Ground clearance	50 cm
Track width	1.93 m
G Cab width	0.96 m
H Overall width - stabilizers down	3.34 m
Height to high boom pivot	1.75 m
Approach angle	29 °
■ Upper rotation of forks	18 °
Lower rotation of forks	104 °
Weight with forks	12320 kg
Tyres type	18 - 22,5 TMR4

#### **ENGINE**

Engine model	Deutz BF04M2012
Engine Capacity	4038 cm3
Engine power output	74,9 kW / 102 CV
Engine torque	420 Nm
Transmission type	Hydrostatic
Fuel tank	132.5
Engine oil	110 l



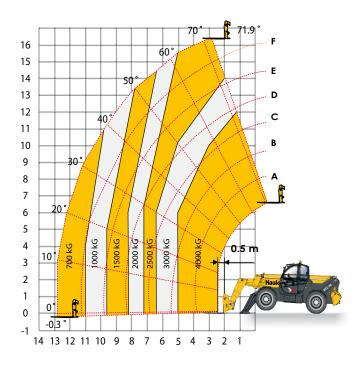

#### STANDARD EQUIPMENT

- Hydrostatic transmission with variable capacity pump and engine
- 4 wheel drive and steer
- Fuel filter with water separator
- Load sensing equipment pump
- Flow-Sharing electrically controlled controls
- Proportional controls for movement of boom/telescopic arm /excavation and accessories
- Safety valves on hydraulic jacks
- Possibility to combine mast/telescopic boom/excavation and accessories movements
- Auxilliary hydraulic ports
- Overload/dangerous movements cut out switch
- Tilt corrector: +/- 10 °
- Long stabilizers and large footplates for greater stability
- ROPS/FOPS cabin with heating and ventilation
- Hydraulic axle locking

#### **OPTIONS AND ACCESSORIES**

- Cold Weather Package
- Biodegradable oil
- Cold environment oil
- Hot environment oil
- Air conditioning
- Working lights
- Metal windscreen protector (FOPS)
- 4-in-1 bucket: 1m3 or 0.75m3





























