

## **SpiderLine**<sup>™</sup>

The NEW & IMPROVED design for the SpiderLine<sup>™</sup> Temporary Horizontal Lifeline (THLL) takes the worry out of fall protection for ironworkers. It is a safe, reliable and proven solution for workers on bridges, building construction, roof tops and many other elevated surfaces.



SPIDERLINE<sup>™</sup> NEW & IMPROV



Access Sales, Rentals, Safety Solutions and Training.





📕 Quality-made in the USA



## SAFE, SIMPLE, FLEXIBLE

SpiderLine<sup>™</sup> is a simple, easy to install fall protection system, engineered to fit multiple applications at height, improving workers' safety and productivity.

## **Benefits**

- Easy to install
- No drilling or welding required
- Freedom to move without having to unhook lanyard improves productivity
- Trip hazards are eliminated with the low profile chain and the vertical angle that allows an open walkway

- Modular Stanchion Post makes it more affordable
- Flexible for multiple project needs
- Meets OSHA and CSA requirements



With superior features at an affordable cost, the NEW & IMPROVED SpiderLine<sup>™</sup> is the safe, reliable and trusted horizontal lifeline on the market.

#### STANDARD PASS THROUGH STANCHIONS

Allow freedom to move without having to unhook

#### **EASY TO INSTALL**

Top-of-beam bolts provide easier installation

Wing nut to tighten chain

#### WIDE CLAMP OPTION

Connects to beams up to 36 in. wide with 3-3/8 in. flange thickness

#### **OPEN WALKWAY**


12.5° vertical angle allows open walkway for workers

Low profile chain eliminates trip hazards

**FLEXIBLE FOR MULTIPLE JOBS** 

Chain allows for a variety of beam widths



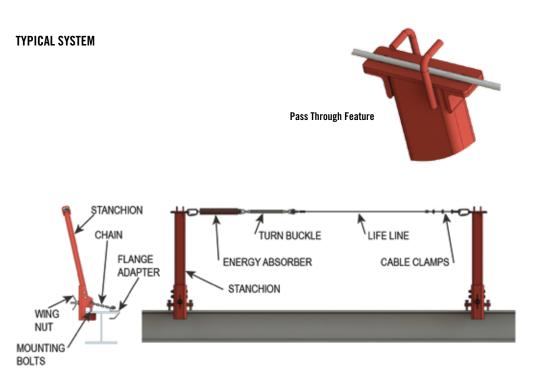

#### SPECIFICATIONS

Max Length: 300 ft

#### Accommodates I-Beams:

Standard up to 36 in. (914 mm) wide - with flanges up to 2-1/4 in. (57mm)

Wide beam option up to 36 in. (914 mm) wide - with 2-1/4 in. (57 mm) to 3-3/8 in. (86 mm) flange thicknesses

Max Span Between Stanchions: 60 ft

Min Span: 20 ft

Persons Max per Span: 2

Persons Max per Installation: 6

Wire Rope: 5/16 5x26 WS

# Call 877-774-3370 today to order your SpiderLine™