


# 6000

Series Telescopic Crane



## ► 6000 Series Telescopic Crane

Let our telescopic cranes take on the heavy lifting. The IMT 6000 Series telescopic crane has a maximum lifting capacity of 6000 lb (2721.6 kg) and a horizontal boom reach of 21' 8" (6.6 m). Featuring the patent-pending Penta Boom™ design, this crane is built for strength and control, and when combined with an IMT Dominator® creates the ultimate service and maintenance truck.

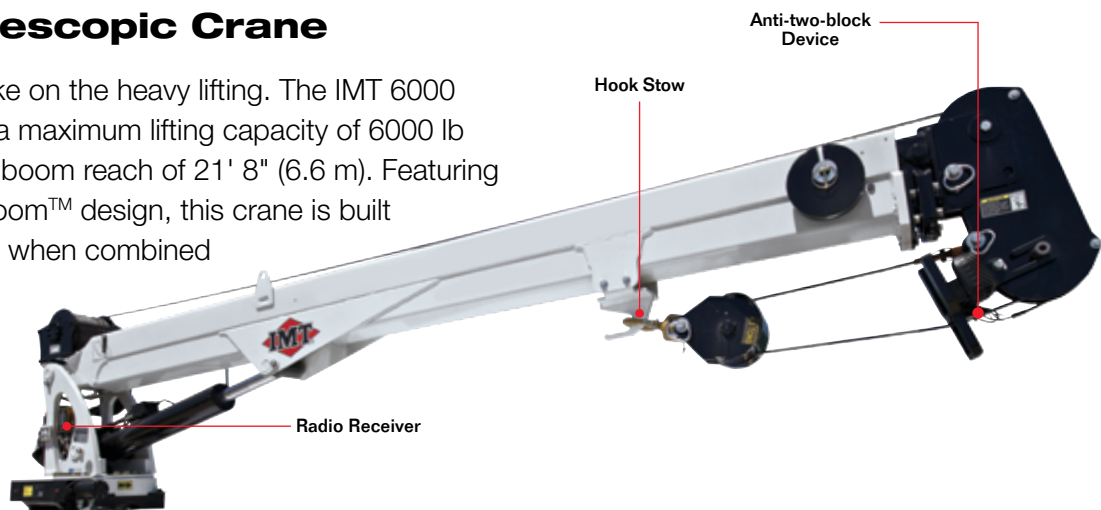

### Standard Features

- 21' 8 (6.6 m) of boom reach
- Patent-pending Penta Boom design
- Fully proportional “pistol grip” radio remote control
- Flip sheave boom tip
- Boom angle -10° to +80° (-0.2 to 1.4 rad)
- Increased capacity
- Patent-pending hook stow
- Patent-pending anti-two-block device
- Radio remote control receiver

### Options

- Boom tip lights

### Body Sizes

- Dominator I
- Dominator II



### Radio Remote Control

The capacity indicator lights on our pistol grip radio remote control tell the operator how much crane lifting capacity has been used. If the crane reaches the overload point, an automatic safety feature slows the crane to 50%.



### Radio Remote Control Receiver

To simplify troubleshooting and increase productivity, our radio remote control receiver provides an LED readout detailing error codes. It also uses programmable logic for precise control of individual functions.



### Flip Sheave

Our unique flip sheave allows operators to work in tighter work areas by reducing the boom tip profile height by 8" (20.3 cm).

### Minimum Chassis Specifications

Chassis Style	Conventional cab
Front Axle Rating (GAWR)	5000 lb (2268 kg)
Rear Axle Rating (GAWR)	9500 lb (4309.1 kg)
Wheelbase	154" (391 cm)
Cab-to-Axle	60" – 120" (152 – 305 cm)
Resistance to Bending Moment Minimum	600,000 in-lb (69,127 kg-m)
Frame Section Modulus	14.2 cu in (232.7 cm <sup>3</sup> )
Gross Vehicle Weight Rating	15,000 – 26,000 lb (6805 – 11,793 kg)

In addition to these specifications, heavy-duty electrical and cooling systems are required. It is recommended that the vehicle be equipped with an engine tachometer, auxiliary brake lock, and power steering.



### Penta Boom Design



Different material thickness to address structural requirements, while controlling the weight of the crane.

## 6000 Series Specifications

## 22' Boom

Crane Rating*	39,000 ft-lb (6.7 tm)
Max. Capacity	6000 lb (2721.6 kg)
Max. Horizontal Reach (with flip sheave up)	22' 6" (6.9 m)
Max. Horizontal Reach (with flip sheave down)	21' 8" (6.6 m)
Max. Capacity @ Max. Reach	1700 lb (771.1 kg)
Fully Retracted	11' 11" (3.6 m)
Hydraulic Extensions	59.7" (151.6 cm) 57.2" (145.3 cm)
Lifting Height (with flip sheave down)	23' 10" (6.5 m)
Crane Weight	1785 lb (809.7 kg)
Crane Storage Height	40.6" (103.1 cm)
Center of Gravity	
Horizontal from CL of rotation	42" (106.7 cm)
Vertical from bottom of crane base	19.6" (49.8 cm)
Required Mounting Space for Crane Base	20" x 21" (50.8 x 53.3 cm)
Optimum Pump Capacity	10 – 12 gpm (37.9 – 45.4 L/min)
Tie-Down Bolt Pattern	14.75" x 14.75" (37.5 x 37.5 cm)
Rotational Torque	9000 ft-lb (1.3 tm)
Main Boom Elevation Speed	12 sec
Extension Boom Extend Speed	33 sec

\*Crane rating (ft-lb) is the rated load (lb) x the respective distance (ft) from centerline of rotation with all extensions retracted and lower boom in horizontal position.

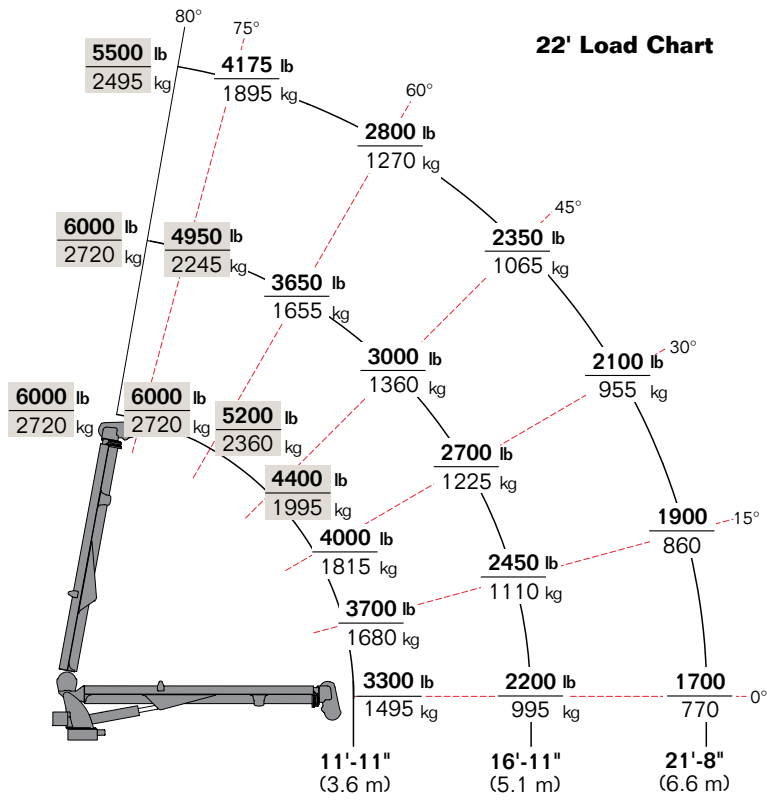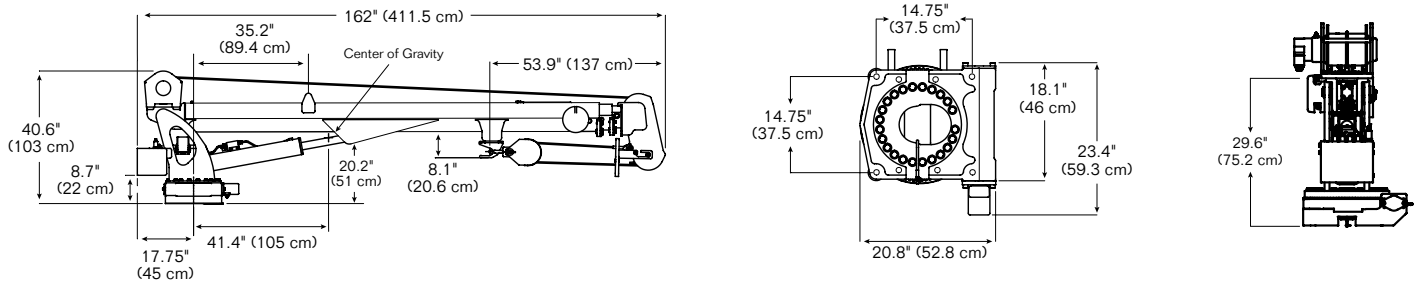

- Maximum one-part line weight is 4300 lb (1950 kg)
- The weight of load-handling devices is part of the load lifted and must be deducted from the rated capacity

### Power Source

- Power provided by integral-mounted hydraulic pump and PTO
- Min. requirement is 23.5 hp (17.5 kW) based on 10 gpm at 3000 psi (37.9 L/min at 206.8 bar)
- Other standard power sources can be utilized

### Cylinder Holding Valves

- All cylinders equipped with integral-mounted counterbalance valves
- Prevent sudden cylinder collapse in case of component failure

### Rotation System

- Consists of a worm gear and turntable gear bearing
- Powered by a high-torque hydraulic motor
- Standard rotation is 400° (6.98 rad)
- Speed rotation is 30 seconds

### Excessive Load Limit System (ELLS)

- Pressure transducer used to sense overload
- When overloaded, the following functions are stopped: boom down, extension out, and winch up

### Planetary Winch

- Capacity of 3800 lb (1724 kg) powered by high-torque hydraulic motor
- Single line operating speed of 60 fpm (18.2 m/min) under no-load conditions
- Maximum two-part line capacity of 6000 lb (2721.6 kg)
- Equipped with 85' (25.9 m) of 3/8" (9.5 mm) of 6 x 25 FW PRF LRL IWRC XIPS wire rope
- Anti-two-block prevents the snatch block assembly from coming in contact with boom tip
- Speed of winch is 60 fpm (0.3 m/sec)
- Meets ANSI B30.5 standards

### Hydraulic System

- Open-centered, full pressure system
- System requires 10 gpm (37.9 L/min) optimum oil flow at 3000 psi (206.8 bar)
- Fully proportional control valve with "pistol grip" radio remote control system
- Includes radio elimination cable, hydraulic oil reservoir, and suction and return line filters



### Nothing Says Commitment Like The Diamond.<sup>SM</sup>

IMT has been meeting the needs of our customers for over 50 years and none of it would have been possible without a distributor network that's second to none. IMT distributors offer fast, knowledgeable service and the ability to help customers find the right product for every application. When you're looking for reliable equipment and dependable service, remember IMT.



An Oshkosh Corporation Company

### Iowa Mold Tooling Co., Inc.

500 Highway 18 West  
Garner, Iowa 50438  
800-247-5958 • [www.imt.com](http://www.imt.com)

IMT reserves the right to make changes in engineering, design, and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. IMT, IMT logo, Dominator, and Penta Boom are registered trademarks or trademarks of Iowa Mold Tooling Co., Inc., Garner, IA, USA. NOTHING SAYS COMMITMENT LIKE THE DIAMOND is a service mark of Iowa Mold Tooling Co., Inc. © 2012 Iowa Mold Tooling Co., Inc. All Rights Reserved.

05/12