Gen-Eye Hot-Spot Locator *and* Transmitter

It's Simply...Easier





We've Simplified Locating with



The new Gen-Eye Hot Spot™ pipe locator makes locating easier than ever. Its total field antenna array and on-screen icons lead you right to your target, without the long learning curve.

Whether you're an experienced pro or a first time user, you can quickly locate inspection cameras, sondes, active power lines and utility lines with pinpoint accuracy. No need to interpret numbers and bar graphs.

Gen-Eye Hot Spot's Unique Mapping/



Features

Easy to read display – Icons lead you to your target. Auto backlight lets you locate in dimly lit areas.

Total field antenna array – Allows you to locate from any direction.

Line direction compass – Tells you the lay of the pipe.

Industry's most rugged locator – Its IP65 rating is the industry's highest for performing in dusty, dirty or wet jobsite conditions. Passed 1-meter drop test; screen passed 18" steel ball drop test.

Superior Battery Life – Lasts approximately 30 hours—more than twice as long as others. Automatic shutdown feature saves power.

Expanded Frequencies – Locates two sonde frequencies, two power frequencies and four line frequencies (with external transmitter).


Upgradeable Software – Use the USB port to upgrade software in the field or for a screen capture.

Simple, menu-based user interface – No need for multiple screens. Easy-to-access menus make it easier to use than other locators.

the Gen-Eye Hot Spot Locator.

The easy-to-see auto backlit LCD display shows you the way with arrows that point you in the right direction every time. Utility line location and active buried power line locating is just as easy.

The Hot Spot is the industry's most rugged locator. Rated at IP65, it is dust and dirt proof, and water resistant. It passed the one meter drop test and the screen passed the 18" steel ball drop test.

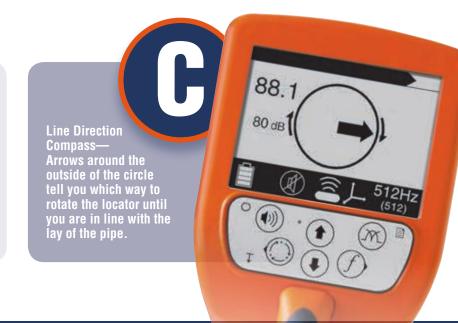

Directional Guidance System:

Specifications

Camera/Sonde Frequencies: 512 Hz and 33KHz Line/Utility Frequencies: 1KHz, 8KHz, 33KHz, 65KHz Active Power Line Frequencies: 60/50Hz and

180/150Hz

Depth Range: 10 ft. in cast iron pipe/20 ft.

in clay or plastic

Screen: LCD Digital Signal Read-Out, Graphic Display, Directional Arrows, Null Icon, Camera Icon, Utility Icon, Audible Tone, Auto Digital Depth,

Battery Status, Auto Backlight

Antenna Configurations: Total Field, Single Peak, Twin Peak, Null and Left/Right (Line Location Only)

External Ports: Mini USB
Weight: 4.8 lbs./2.18 Kg
Batteries: 2 D-cell alkaline
(Approximately 30 hours of life)

Operating Temperature Range: -4° F to 122° F

(-20° C to 50° C)



Gen-Eye Hot Spot 5-Watt Transmitter



Utility Icon—
Indicates buried utilities
or active power lines.
Circle the energized pipe

the line.

33KHz or 65KHz



Locating buried utilities used to be tough. Not anymore! With the powerful 5-watt Hot Spot transmitter, location

is easier than ever. More power means more signal to locate. Choose one of 4 frequencies – 1KHz, 8KHz,

Features

More Power – Powerful 5-Watt output with 5 output levels makes locating utilities easier.

Expanded Frequencies – Locates four line frequencies – 1KHz, 8KHz, 33KHz and 65KHz (65KHz at 1 watt max).

In tandem, the Hot Spot locator and this matching

Gen-Eye Hot Spot Transmitter finds buried utilities quickly

and easily. Like the locator, this transmitter has been de-

signed to take the confusion out of getting the job done.

Simple, menu-based user interface – No need for multiple screens. Easy-to-access menus make it easier to use than other models.

Easy-to-read display – Icons indicate a quality connection and power settings. Auto backlight lets you locate in dimly lit areas.

Superior Battery Life – Lasts approximately 100+ hours—more than twice as long as other brands. Automatic shutdown feature saves power.

Upgradeable Software – Use the USB port to upgrade software in the field or for a screen capture.

Specifications

or active power line until

the diamond appears on

Line/Utility Frequencies: 1KHz, 8KHz,

33KHz, 65KHz

Output: 5 Watts with 5 output settings

Weight: 8 lbs./3.5 Kg

Batteries: 10 D-cell alkaline (Approximately 100+ hours of life)

Antenna Configurations: Total Field, Single Peak, Twin Peak, Null and Left/Right (Line Location Only)

External Ports: Mini USB

Dimensions: 10" H x 12" L x 8" W (25.4 cm x 30.5 cm x 19 cm)

Operating Temperature Range: -4° F to 122° F

(-20° C to 50° C)

Also available in a 1-Watt single frequency (65KHz) model

The Gen-Eye Hot Spot Locator and Transmitter are so easy to use, you'll find locating to be faster and more productive. That means more profitability for your business. To really appreciate how easy the Gen-Eye Hot Spot is to use, you

have to try it for yourself. For a free demonstration, or to see General's complete line of camera inspection systems, contact us at 800.245.6200 or visit:

www.drainbrain.com/geneye



