

350G LC/380G LC

35–38 metric ton



JOHN DEERE



350G LC/380G LC

35–38 metric ton



JOHN DEERE



Put more work within reach.

Whether you're loading trucks, digging trenches, demolishing structures, or placing pipe, you'll get more done with our G-Series Excavators. Their rugged EPA Final Tier 4 (FT4)/EU Stage IV PowerTech™ diesel engines meet rigid emission regulations, enabling you to work, everywhere there's work — without compromising power, reliability, or ease of operation. Customer-inspired refinements include a comfortable, spacious cab. And an enhanced LCD monitor with simplified navigation that lets an operator easily dial-in a wealth of machine information and functionality. Exceptional power, smoothness, and ease of operation — the 350G LC and 380G LC deliver all you've come to expect in John Deere excavators. And then some.





Key specifications	350G LC	380G LC
Net rated power	202 kW (271 hp)	202 kW (271 hp)
Operating weight	35 650 kg (78,550 lb.)	38 100 kg (83,992 lb.)
Maximum digging depth	8.18 m (26 ft. 10 in.)	8.18 m (26 ft. 10 in.)
Arm digging force	152.6–159.0 kN (34,314–35,745 lb.)	152.6–159.0 kN (34,314–35,745 lb.)
Bucket digging force	225.2–246.0 kN (50,628–55,303 lb.)	225.2–246.0 kN (50,628–55,303 lb.)



Work harder. And smarter.

Who says you have to choose between working harder and working smarter? With our engine/hydraulic management system commanding impressive hydraulic muscle, these excavators do both — putting that extra ability to work with typically smooth operation and finesse. Add to this three power modes and power boost, and these excavators provide everything you need to give productivity an extra push. Combining brawn and brains, our G-Series is a wise choice.



Powerwise™ III perfectly balances engine performance and hydraulic flow for predictable operation. Three productivity modes allow you to choose the digging style that fits the job. **High-productivity** delivers more power and faster hydraulic response to move more material. **Power** delivers a balance of power, speed, and fuel economy for normal operation. **Economy** limits top speed and helps save fuel.


Choose from a variety of track widths, arm lengths, buckets, high-flow auxiliary hydraulic packages, and numerous other options.


Need extra stability or lift capacity? Opt for the 380G LC. Its standard heavy-duty boom, 3.2-m (10 ft. 6 in.) heavy-duty arm, and undercarriage provide the stamina and strength to handle demanding pipeline, demolition, and scrap-handling tasks.

1. Low-effort joysticks, unmatched metering, and smooth multifunction operation deliver the control and finesse you need for utility work.

2. Generous flow, arm force, and swing torque help speed cycles. So you can do your best to stay on schedule or ahead of the weather.

3. When the task calls for a little extra, simply press the power-boost button on the right-hand control and muscle through.

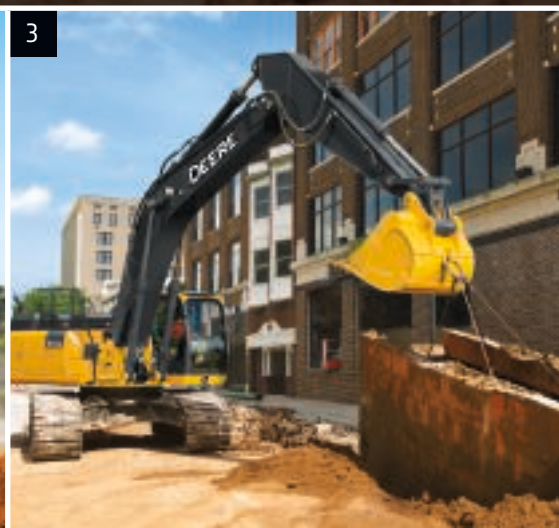

The image shows the interior of a modern excavator cab. On the left, there is a control panel with a rotary dial and a small digital display. In the center, a joystick is mounted on a console. To the right, a large, high-back seat with a grey fabric cover is visible. The floor is covered with a black rubber mat. In the background, yellow mechanical components of the excavator are visible through the glass window. Several warning labels are posted on the dashboard area.

Operating ease takes a turn for the better.

G-Series Excavators make it easy for your operators to “dial things up.” The refined monitor employs a rotary control that makes it quick and easy to tap into an abundance of performance and convenience functions and features. Operators will also appreciate the comfortable fabric-covered high-back seat and increased legroom in the spacious, well-appointed cab. As always, unsurpassed all-round visibility, low-effort joysticks, a highly efficient HVAC system, and numerous other amenities provide everything needed to do your best work.



Spacious cab is comfortable and noticeably quiet. Silicone-filled mounts effectively isolate operators from noise and vibration.

We've got your back with a sculpted mechanical-suspension high-back seat. Seat has 267 mm (10½ in.) of travel, sliding together or independent of the joystick console. So it won't cramp an operator's style. For even more support and comfort, opt for the air-suspension heated seat.

Ergonomically correct short-throw pilot levers provide smooth, predictable fingertip control with less movement or effort. Push-buttons in the right lever allow fingertip control of auxiliary hydraulic flow for operating attachments.

No shortage of storage in here. There's a place for a cooler, cup holders, and even a hot/cold box that keeps beverages at just the right temperature.

Optional cab and right-side boom lights provide extra illumination to extend your workday beyond daylight hours.

A new hood design ensures optimal visibility to the sides and rear, even with the increased under-the-hood space requirements of EPA Final Tier 4 (FT4)/EU Stage IV components.

1. Multi-language LCD monitor and rotary dial provide intuitive access to a wealth of information and functions. Just turn and tap to select work mode, access operating info, check maintenance intervals, source diagnostic codes, adjust cab temperature, and tune the radio. Plus much more.
2. Wide expanse of front and side glass, narrow front cab posts, large overhead glass, and numerous mirrors provide virtually unobstructed all-around visibility. If you need to see more, choose the optional camera that displays the action behind on the monitor.
3. Automatic, high-velocity bi-level climate-control system with automotive-style adjustable louvers helps keep the glass clear and the cab comfortable.



Nothing runs like a Deere, because nothing is built like one.

When you've got places to go, people to see, and schedules to keep, you need dependable workers like these. Built to deliver unsurpassed uptime, these go-getters employ many of the same job-proven digging structures and hydraulic, electrical, and undercarriage components as their highly regarded predecessors. You'll also continue to profit from durability-enhancing "extras" such as tungsten-carbide-coated wear surfaces, welded-boom bulkheads, wet-sleeve engine liners, and extended service intervals. When you know how they're built, you'll run a Deere.

Graphite-iron wet-sleeve cylinder liners, mono-steel pistons, and large-diameter connecting rods ensure long-term engine durability.

Oil-impregnated bushings enhance durability and extend grease intervals to 500 hours for the arm-and-boom joint and 100 hours for the bucket joint.

Tungsten-carbide coating creates an extremely wear-resistant surface to protect the all-important bucket-to-arm joint.


Grooved bushings and thermal-coated bucket joints increase arm- and boom-lube intervals to 500 hours.

1. Thick-plate single-sheet mainframe, box-section track frames, and industry-exclusive double-seal swing bearing deliver rock-solid durability.

2. With large idlers, rollers, and strutted links, the sealed and lubricated undercarriage delivers long and reliable performance.

3. Highly efficient, heavy-duty cooling system keeps things cool, even in tough environments or high altitudes.

4. Reinforced D-channel side frames provide maximum cab and component protection.

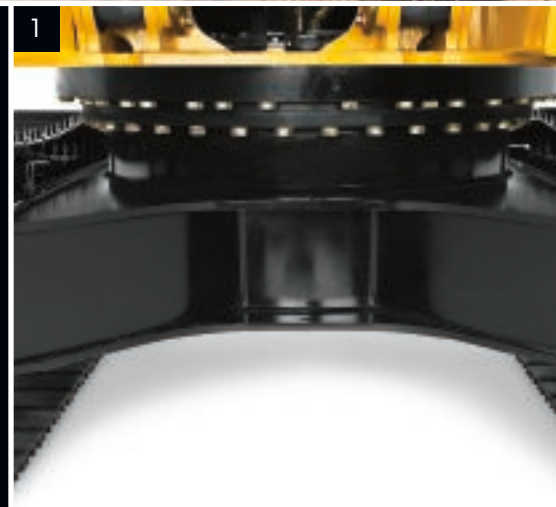




John Deere PowerTech EPA Final Tier 4 (FT4)/EU Stage IV diesel engines meet emission regulations without sacrificing power or torque. We built on our Interim Tier 4 (IT4)/Stage IIIB solution to deliver the best combination of performance, efficiency, and reliability. Our field-proven technology is simple, fluid efficient, fully integrated, and fully supported. It employs field-proven cooled exhaust gas recirculation (EGR), easy-to-maintain high-uptime exhaust filters, and selective catalytic reduction (SCR).

A John Deere exclusive, three welded bulkheads within the boom resist torsional stress for unsurpassed durability.

The optional grade-reference system includes sensor mounts to help speed installation, eliminating the need to grind, weld, and repaint. Our open-architecture system design allows you to employ your favorite brand of grade-control system to help maximize productivity and uptime while lowering daily operating costs.



2

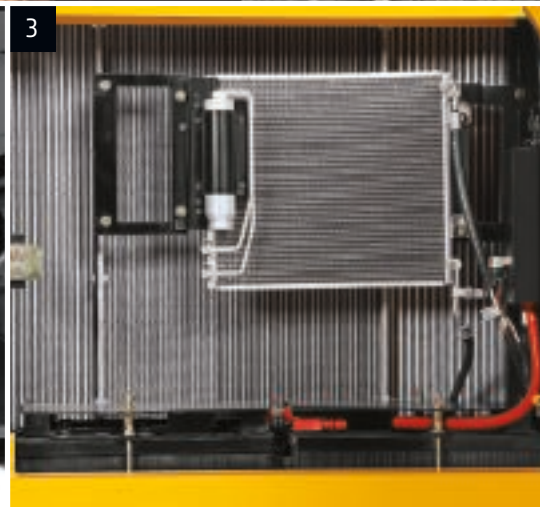

3



4

Seeking simplified maintenance? You'll become a big fan of the G-Series.

Swing open the side panels and you'll discover many of the numerous ways these excavators can minimize maintenance, increase uptime, and reduce daily operating costs. The hydraulically driven fan runs only as fast or often as needed, reducing fuel consumption and wear-causing debris flow through the cooler cores. Grouped service points make quick work of the daily routine. Easy-to-check sight gauges and fluid reservoirs. Quick-change remote-mounted filters. Convenient fluid-sample ports and advanced self-diagnostics — with time- and money-saving advantages such as these, and a dealer-customized Ultimate Uptime package to help optimize your operation, there's more to like.

1. LCD monitor tracks scheduled maintenance intervals and issues reminders, including DPF servicing. Should a problem arise, it provides diagnostic information to help decrease downtime.
2. Diagnostic displays and fluid-sample ports help speed preventative maintenance and troubleshooting.
3. Vertical spin-on engine oil and fuel filters are conveniently located in the right rear compartment for easy ground-level servicing.
4. Ground-level fresh-air cab filter is quickly serviced from outside the cab. Where it's more likely to get done.
5. Centralized lube banks place difficult-to-lube zerks within easy reach. They make greasing less messy and time consuming, too.
6. Cooler cores' 10-fin-per-inch spacing lets trash easily pass to resist plugging. Swing-out coolers provide added core access.



1

Engine Oil Filter	
Previous Maintenance	
2013/06/06	0.0h
Remains	498.8h
Maintenance Interval	500.0h






A second door has been added to the right side of the machine to provide even more wide-open access to components.

Optional reversing fan back-blows cooler cores to reduce debris buildup. It's a welcome addition that helps increase uptime.

Auto-idle automatically reduces engine speed when hydraulics aren't in use. Auto-shutdown further preserves precious fuel.

Ash-service intervals for the diesel particulate filter (DPF) are condition based, meaning the machine will notify the operator before service is required. Typically, ash service is not necessary until the first engine overhaul depending on machine application and maintenance practices. FT4 components are warranted for 10,000 hours.

Large fuel tanks and 500- and 5,000-hour engine and hydraulic oil-service intervals decrease downtime for routine maintenance. Fluid-level sight gauges are conveniently located and can be checked at a glance.

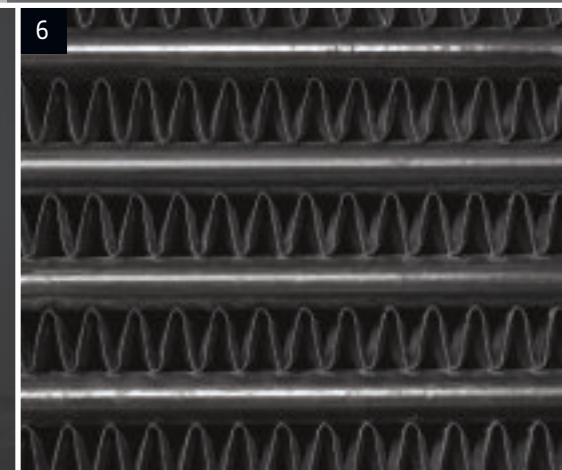

350G LC



Engine	350G LC		
	Base engine for use in U.S. and U.S. Territories		
Manufacturer and Model	John Deere PowerTech™ PSS 9.0 L		
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV		
Net Rated Power (ISO 9249)	202 kW (271 hp) at 1,900 rpm		
Cylinders	6		
Displacement	9.0 L (549 cu. in.)		
Off-Level Capacity	70% (35 deg.)		
Aspiration	Series turbocharged, air-to-air charge-air cooler		
Cooling			
	Cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive		
Powertrain			
	2-speed propel with automatic shift		
Maximum Travel Speed			
Low	3.2 km/h (2.0 mph)		
High	5.0 km/h (3.1 mph)		
Drawbar Pull	30 350 kg (66,900 lb.)		
Hydraulics			
	Open center, load sensing		
Main Pumps	2 variable-displacement pumps		
Maximum Rated Flow	288 L/m (76.1 gpm) x 2		
Pilot Pump	One gear		
Maximum Rated Flow	30.2 L/m (8.0 gpm)		
Pressure Setting	3900 kPa (566 psi)		
System Operating Pressure			
Circuits			
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
	<i>Bore</i>	<i>Rod Diameter</i>	<i>Stroke</i>
Boom (2)	145 mm (5.7 in.)	100 mm (3.9 in.)	1520 mm (59.8 in.)
Arm (1)	170 mm (6.7 in.)	115 mm (4.5 in.)	1740 mm (68.5 in.)
Bucket (1)	140 mm (5.5 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Mass-Excavating (ME) Bucket (1)	145 mm (5.7 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	1,400 CCA		
Alternator Rating	100 amp		
Work Lights	2 halogen (one mounted on boom, one on frame)		
Undercarriage			
Rollers (each side)			
Carrier	2		
Track	8		
Shoes, Triple Semi-Grousers (each side)	48		
Track			
Adjustment	Hydraulic		
Guides	3 per side		
Chain	Sealed and lubricated		
Ground Pressure			
800-mm (32 in.) Triple Semi-Grouser Shoes	50.1 kPa (7.27 psi)		



Swing Mechanism	350G LC
Speed	10.7 rpm
Torque	120 000 Nm (88,500 lb.-ft.)

Serviceability

Refill Capacities	
Fuel Tank	628 L (166 gal.)
Diesel Exhaust Fluid (DEF) Tank	35 L (9.3 gal.)
Cooling System	39.7 L (10.5 gal.)
Engine Oil with Filter	27 L (7.2 gal.)
Hydraulic Tank	193 L (51 gal.)
Hydraulic System	290 L (77 gal.)
Swing Drive	11.8 L (12.5 qt.)
Gearbox	
Propel (each)	8.5 L (9.0 qt.)
Pump Drive	1.1 L (1.2 qt.)


Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 6928-kg (15,274 lb.) counterweight; and 800-mm (32 in.) triple semi-grouser shoes

Operating Weight	35 650 kg (78,550 lb.)
------------------	------------------------

Component Weights

Undercarriage with 800-mm (32 in.) Triple Semi-Grouser Shoes	12 750 kg (28,100 lb.)
One-Piece Boom (with arm cylinder)	
6.4 m (21 ft. 0 in.)	3031 kg (6,682 lb.)
5.7-m (18 ft. 8 in.) ME	3234 kg (7,130 lb.)
Arm with Bucket Cylinder and Linkage	
2.1 m (6 ft. 10 in.) ME	1821 kg (4,015 lb.)
2.67 m (8 ft. 9 in.) Heavy-Duty (HD)	1909 kg (4,209 lb.)
3.2 m (10 ft. 6 in.)	1758 kg (3,876 lb.)
4.0 m (13 ft. 1 in.)	1898 kg (4,184 lb.)
Boom-Lift Cylinders (2), Total Weight	624 kg (1,376 lb.)
1.76-m ³ (2.3 cu. yd.), 1370-mm (54 in.) HD Bucket	1160 kg (2,557 lb.)
Counterweight, Standard	6928 kg (15,274 lb.)

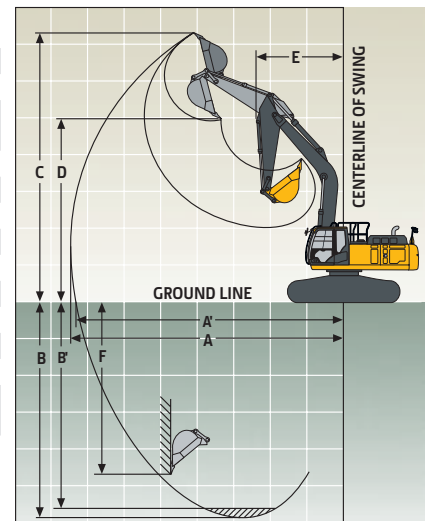


Operating Dimensions

Arm Length	2.1 m (6 ft. 10 in.) ME /	2.67 m (8 ft. 9 in.) HD /	2.67 m (8 ft. 9 in.) HD /	3.2 m (10 ft. 6 in.) /	4.0 m (13 ft. 1 in.) /
	5.7-m (18 ft. 8 in.)	5.7-m (18 ft. 8 in.)	6.4-m (21 ft. 0 in.)	6.4-m (21 ft. 0 in.)	6.4-m (21 ft. 0 in.)
	Boom Length	Boom Length	Boom Length	Boom Length	Boom Length
Arm Digging Force					
SAE	275.0 kN (45,914 lb.)	213.0 kN (45,914 lb.)	204.2 kN (45,914 lb.)	177.6 kN (39,930 lb.)	152.6 kN (34,314 lb.)
ISO	288.0 kN (64,745 lb.)	222.0 kN (49,908 lb.)	222.0 kN (49,908 lb.)	185.0 kN (41,590 lb.)	159.0 kN (35,745 lb.)
Bucket Digging Force					
SAE	229.0 kN (50,628 lb.)	214.0 kN (50,628 lb.)	225.2 kN (50,628 lb.)	225.2 kN (50,628 lb.)	225.2 kN (50,628 lb.)
ISO	264.0 kN (59,350 lb.)	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)
A Maximum Reach	9.41 m (30 ft. 10 in.)	9.93 m (32 ft. 7 in.)	10.57 m (34 ft. 8 in.)	11.10 m (36 ft. 5 in.)	11.86 m (38 ft. 11 in.)
A' Maximum Reach at Ground Level	9.16 m (30 ft. 1 in.)	9.69 m (31 ft. 9 in.)	10.36 m (34 ft. 0 in.)	10.89 m (35 ft. 9 in.)	11.67 m (38 ft. 3 in.)
B Maximum Digging Depth	5.62 m (18 ft. 5 in.)	6.22 m (20 ft. 5 in.)	6.84 m (22 ft. 5 in.)	7.38 m (24 ft. 3 in.)	8.18 m (26 ft. 10 in.)
B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom	5.39 m (17 ft. 8 in.)	6.02 m (19 ft. 9 in.)	6.64 m (21 ft. 9 in.)	7.21 m (23 ft. 8 in.)	8.04 m (26 ft. 5 in.)
C Maximum Cutting Height	9.43 m (30 ft. 11 in.)	9.66 m (31 ft. 8 in.)	9.99 m (32 ft. 9 in.)	10.36 m (34 ft. 0 in.)	10.75 m (35 ft. 3 in.)
D Maximum Dumping Height	6.39 m (21 ft. 0 in.)	6.60 m (21 ft. 8 in.)	6.94 m (22 ft. 9 in.)	7.24 m (23 ft. 9 in.)	7.63 m (25 ft. 0 in.)
E Minimum Swing Radius	4.04 m (13 ft. 3 in.)	4.05 m (13 ft. 3 in.)	4.61 m (15 ft. 1 in.)	4.46 m (14 ft. 8 in.)	4.47 m (14 ft. 8 in.)
F Maximum Vertical Wall	4.15 m (13 ft. 7 in.)	4.78 m (15 ft. 8 in.)	5.51 m (18 ft. 1 in.)	6.42 m (21 ft. 1 in.)	7.27 m (23 ft. 10 in.)

Machine Dimensions **350G LC**

Arm Length	2.1 m (6 ft. 10 in.) ME / 5.7-m (18 ft. 8 in.) Boom Length	2.67 m (8 ft. 9 in.) HD / 5.7-m (18 ft. 8 in.) Boom Length	2.67 m (8 ft. 9 in.) HD / 6.4-m (21 ft. 0 in.) Boom Length	3.2 m (10 ft. 6 in.) / 6.4-m (21 ft. 0 in.) Boom Length	4.0 m (13 ft. 1 in.) / 6.4-m (21 ft. 0 in.) Boom Length
A Overall Length	10.99 m (36 ft. 1 in.)	11.33 m (37 ft. 2 in.)	11.35 m (37 ft. 3 in.)	11.20 m (36 ft. 9 in.)	11.29 m (37 ft. 0 in.)
B Overall Height	3.68 m (12 ft. 1 in.)	3.47 m (11 ft. 5 in.)	3.47 m (11 ft. 5 in.)	3.27 m (10 ft. 9 in.)	3.60 m (11 ft. 10 in.)
C Rear-End Length/Swing Radius	3.60 m (11 ft. 10 in.)				
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)				
E Undercarriage Length	4.94 m (16 ft. 2 in.)				
F Counterweight Clearance	1.18 m (3 ft. 10 in.)				
G Upperstructure Width	2.99 m (9 ft. 10 in.)				
H Cab Height	3.14 m (10 ft. 4 in.)				
I Track Width with Shoes	600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.)				
J Gauge Width	2.59 m (8 ft. 6 in.)				
K Ground Clearance	0.50 m (20 in.)				
L Overall Width with Shoes	600 mm (24 in.) 3.19 m (10 ft. 6 in.) 700 mm (28 in.) 3.29 m (10 ft. 10 in.) 800 mm (32 in.) 3.39 m (11 ft. 2 in.)				

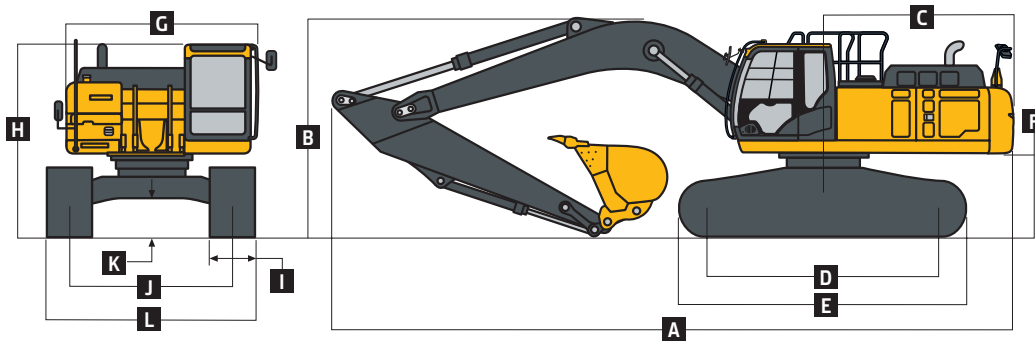

Lift Capacities

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
6.0 m (20 ft.)							10 841	8528	(23,900)	(18,800)		
4.5 m (15 ft.)					14 674	13 245	11 635	8187	(32,350)	(29,200)	(25,650)	(18,050)
3.0 m (10 ft.)							12 859	7756	(28,350)	(17,100)	8981	5330
1.5 m (5 ft.)							12 701	7371	(28,000)	(16,250)	8800	5194
Ground Line					19 028	11 249	12 474	7189	(41,950)	(24,800)	(27,500)	(15,850)
-1.5 m (-5 ft.)			21 818	21 818	17 305	11 317	12 496	7212	(48,100)	(48,100)	(38,150)	(24,950)
-3.0 m (-10 ft.)			17 463	17 463	13 676	11 657			(38,500)	(38,500)	(30,150)	(25,700)

Lift Capacities (continued) 350G LC

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 2.67-m (8 ft. 9 in.) HD arm, 5.7-m (18 ft. 8 in.) ME boom, and 1273-kg (2,806 lb.) bucket</i>												
6.0 m (20 ft.)							9888	8732				
							(21,800)	(19,250)				
4.5 m (15 ft.)					13 404	13 404	10 864	8391	9299	5625		
					(29,550)	(29,550)	(23,950)	(18,500)	(20,500)	(12,400)		
3.0 m (10 ft.)					16 579	12 565	12 270	7938	9095	5420		
					(36,550)	(27,700)	(27,050)	(17,500)	(20,050)	(11,950)		
1.5 m (5 ft.)					18 847	11 725	12 859	7507	8868	5239		
					(41,550)	(25,850)	(28,350)	(16,550)	(19,550)	(11,550)		
Ground Line					19 323	11 362	12 565	7235	8732	5103		
					(42,600)	(25,050)	(27,700)	(15,950)	(19,250)	(11,250)		
-1.5 m (-5 ft.)			19 686	19 686	18 189	11 340	12 474	7189				
			(43,400)	(43,400)	(40,100)	(25,000)	(27,500)	(15,850)				
-3.0 m (-10 ft.)			20 752	20 752	15 377	11 544	10 977	7348				
			(45,750)	(45,750)	(33,900)	(25,450)	(24,200)	(16,200)				
<i>With 2.67-m (8 ft. 9 in.) HD arm, 6.4-m (21 ft. 0 in.) boom, and 1170-kg (2,580 lb.) bucket</i>												
6.0 m (20 ft.)							9496	9213	8705	6162		
							(20,636)	(19,803)	(19,093)	(13,179)		
4.5 m (15 ft.)					14 206	14 021	10 894	8801	9279	6021		
					(30,447)	(30,255)	(23,562)	(18,960)	(20,190)	(12,922)		
3.0 m (10 ft.)					17 742	12 827	12 506	8285	9573	5798		
					(38,067)	(27,693)	(27,011)	(17,857)	(20,571)	(12,462)		
1.5 m (5 ft.)							13 399	7868	9319	5570		
							(36,850)	(26,125)	(28,794)	(16,949)	(20,037)	(11,982)
Ground Line					18 814	11 932	13 127	7634	9155	5423		
					(42,867)	(25,647)	(28,197)	(16,432)	(19,685)	(11,666)		
-1.5 m (-5 ft.)			12 495	12 495	18 754	11 959	13 059	7575	9117	5389		
			(28,545)	(28,545)	(40,705)	(25,693)	(28,045)	(16,301)	(19,617)	(11,605)		
-3.0 m (-10 ft.)			21 868	21 868	16 665	12 147	12 606	7679				
			(47,544)	(47,544)	(36,066)	(26,109)	(27,142)	(16,540)				
-4.5 m (-15 ft.)			16 500	16 500	12 776	12 551						
			(35,354)	(35,354)	(27,209)	(27,027)						
<i>With 2.67-m (8 ft. 9 in.) HD arm, 6.4-m (21 ft. 0 in.) boom, and 1273-kg (2,806 lb.) bucket</i>												
6.0 m (20 ft.)							9117	8596	8482	5693		
							(20,100)	(18,950)	(18,700)	(12,550)		
4.5 m (15 ft.)					13 449	13 109	10 387	8142	8913	5534		
					(29,650)	(28,900)	(22,900)	(17,950)	(19,650)	(12,200)		
3.0 m (10 ft.)					16 874	11 884	11 929	7620	8890	5284		
					(37,200)	(26,200)	(26,300)	(16,800)	(19,600)	(11,650)		
1.5 m (5 ft.)					17 055	11 158	12 474	7212	8641	5058		
					(37,600)	(24,600)	(27,500)	(15,900)	(19,050)	(11,150)		
Ground Line					19 006	10 932	12 202	6963	8482	4899		
					(41,900)	(24,100)	(26,900)	(15,350)	(18,700)	(10,800)		
-1.5 m (-5 ft.)			13 177	13 177	18 030	10 954	12 134	6895	8459	4876		
			(29,050)	(29,050)	(39,750)	(24,150)	(26,750)	(15,200)	(18,650)	(10,750)		
-3.0 m (-10 ft.)			21 001	21 001	15 944	11 158	11 975	7008				
			(46,300)	(46,300)	(35,150)	(24,600)	(26,400)	(15,450)				
-4.5 m (-15 ft.)			15 490	15 490	11 952	11 612						
			(34,150)	(34,150)	(26,350)	(25,600)						

Lift Capacities (continued) 350G LC

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.2-m (10 ft. 6 in.) arm, 6.4-m (21 ft. 0 in.) boom, and 1170-kg (2,580 lb.) bucket</i>												
6.0 m (20 ft.)									8008	6249		
									(17,528)	(13,381)		
4.5 m (15 ft.)							10 108	8940	8700	6077	6425	4268
							(21,858)	(19,242)	(18,923)	(13,042)		
3.0 m (10 ft.)					16 457	13 179	11 834	8402	9604	5832	7003	4180
					(35,331)	(28,428)	(25,561)	(18,102)	(20,664)	(12,529)	(15,009)	(8,936)
1.5 m (5 ft.)					19 033	12 300	13 321	7933	9338	5579	6882	4069
					(41,053)	(26,492)	(28,796)	(17,084)	(20,070)	(11,995)	(14,768)	(8,714)
Ground Line					19 818	11 930	13 140	7635	9132	5395	6794	3988
					(42,912)	(25,649)	(28,219)	(16,430)	(19,628)	(11,598)	(14,592)	(8,553)
-1.5 m (-5 ft.)			11 956	11 956	19 291	11 864	13 002	7516	9042	5314		
			(27,138)	(27,138)	(41,824)	(25,490)	(27,916)	(16,168)	(19,442)	(11,431)		
-3.0 m (-10 ft.)	14 280	14 280	19 673	19 673	17 649	11 988	13 051	7558	9105	5371		
	(32,048)	(32,048)	(44,674)	(44,674)	(38,194)	(25,762)	(28,032)	(16,269)	(19,608)	(11,580)		
-4.5 m (-15 ft.)			19 521	19 521	14 491	12 307	10 645	7794				
			(41,956)	(41,956)	(31,054)	(26,481)	(22,511)	(16,823)				
<i>With 4.0-m (13 ft. 1 in.) arm, 6.4-m (21 ft. 0 in.) boom, and 1170-kg (2,580 lb.) bucket</i>												
7.5 m (25 ft.)									(14,716)	(13,856)		
6.0 m (20 ft.)									7015	6409	5727	4442
									(15,348)	(13,734)	(11,021)	(9,453)
4.5 m (15 ft.)									7813	6203	7212	4370
									(16,997)	(13,312)	(15,462)	(9,335)
3.0 m (10 ft.)					14 409	13 717	10 708	8612	8838	5923	7070	4234
					(30,952)	(29,563)	(23,138)	(18,543)	(19,174)	(12,721)	(15,160)	(9,058)
1.5 m (5 ft.)					17,673	12 624	12 469	8065	9401	8626	6904	4082
					(38,094)	(27,185)	(26,955)	(17,362)	(20,198)	(12,090)	(14,815)	(8,741)
Ground Line			6735	6735	19 386	12 004	13 195	7669	9133	5386	6766	3955
			(15,416)	(15,416)	(41,927)	(25,812)	(28,331)	(16,500)	(19,623)	(11,573)	(14,526)	(8,476)
-1.5 m (-5 ft.)	6807	6807	10 880	10 880	19 638	11 769	12 949	7458	8974	5244	6692	3887
	(15,227)	(15,227)	(24,662)	(24,662)	(42,536)	(25,286)	(27,797)	(16,037)	(19,285)	(11,269)	(14,381)	(8,342)
-3.0 m (-10 ft.)	11 398	11 398	16 291	16 291	18 694	11 779	12 899	7414	8945	5218		
	(25,572)	(25,572)	(36,941)	(36,941)	(40,455)	(25,307)	(27,693)	(15,947)	(19,236)	(11,226)		
-4.5 m (-15 ft.)	16 873	16 873	23 293	23 293	16 436	11 987	12 165	7536	8817	5356		
	(38,021)	(38,021)	(50,183)	(50,183)	(35,373)	(25,775)	(26,067)	(16,233)	(18,456)	(11,576)		
-6.0 m (-20 ft.)			16 669	16 669	12 038	12 038	8137	7927				
			(35,135)	(35,135)	(25,239)	(25,239)						


Buckets

350G LC

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere Fanggs™ teeth or ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force, 2.67 m (8 ft. 9 in.) HD		Arm Dig Force, 3.2 m (10 ft. 6 in.)		Arm Dig Force, 4.0 m (13 ft. 1 in.)		Bucket Tip Radius		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.	
Heavy Duty Plate Lip	914	36	1.13	1.5	971	2,140	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	4
	1067	42	1.34	1.7	1003	2,212	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	5
	1219	48	1.55	2.0	1055	2,326	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	6
	1372	54	1.76	2.3	1161	2,559	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	6
Heavy Duty High Capacity	760	30	0.96	1.3	1142	2,518	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	4
	914	36	1.19	1.6	1263	2,783	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	4
	1067	42	1.41	1.8	1416	3,123	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	5
	1219	48	1.64	2.1	1506	3,321	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	6
	1372	54	1.87	2.4	1617	3,565	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	6

Bucket Selection Guide*

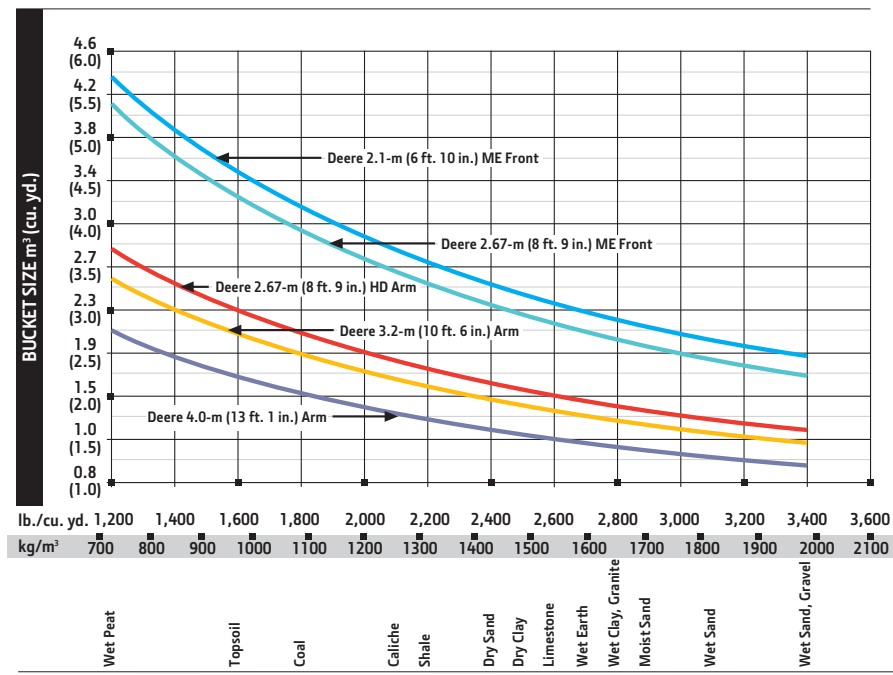

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

380G LC

Engine	380G LC		
	Base engine for use in U.S. and U.S. Territories		
Manufacturer and Model	John Deere PowerTech™ PSS 9.0 L		
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV		
Net Rated Power (ISO 9249)	202 kW (271 hp) at 1,900 rpm		
Cylinders	6		
Displacement	9.0 L (549 cu. in.)		
Off-Level Capacity	70% (35 deg.)		
Aspiration	Series turbocharged, air-to-air charge-air cooler		
Cooling			
	Cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive		
Powertrain			
	2-speed propel with automatic shift		
Maximum Travel Speed			
Low	3.2 km/h (2.0 mph)		
High	5.0 km/h (3.1 mph)		
Drawbar Pull	30 350 kg (66,900 lb.)		
Hydraulics			
	Open center, load sensing		
Main Pumps	2 variable-displacement pumps		
Maximum Rated Flow	288 L/m (76.1 gpm) x 2		
Pilot Pump	One gear		
Maximum Rated Flow	30.2 L/m (8.0 gpm)		
Pressure Setting	3900 kPa (566 psi)		
System Operating Pressure			
	Circuits		
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
	<i>Bore</i>	<i>Rod Diameter</i>	<i>Stroke</i>
Boom (2)	145 mm (5.7 in.)	100 mm (3.9 in.)	1520 mm (59.8 in.)
Arm (1)	170 mm (6.7 in.)	115 mm (4.5 in.)	1740 mm (68.5 in.)
Bucket (1)	140 mm (5.5 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	1,400 CCA		
Alternator Rating	100 amp		
Work Lights	2 halogen (one mounted on boom, one on frame)		
Undercarriage			
Rollers (each side)			
Carrier	2		
Track	8		
Shoes, Triple Semi-Grousers (each side)	48		
Track			
Adjustment	Hydraulic		
Guides	3 per side		
Chain	Sealed and lubricated		



Ground Pressure 380G LC

800-mm (32 in.) Triple Semi-Grouser Shoes 53.5 kPa (7.77 psi)

Swing Mechanism

Speed 10.7 rpm

Torque 120 000 Nm (88,507 lb.-ft.)

Serviceability

Refill Capacities

Fuel Tank 628 L (166 gal.)

Diesel Exhaust Fluid (DEF) Tank 35 L (9.3 gal.)

Cooling System 39.7 L (10.5 gal.)

Engine Oil with Filter 27 L (7.2 gal.)

Hydraulic Tank 193 L (51 gal.)

Hydraulic System 290 L (77 gal.)

Swing Drive 11.8 L (12.5 qt.)

Gearbox

Propel (each) 8.5 L (9.0 qt.)

Pump Drive 1.1 L (1.2 qt.)

Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 7629-kg (16,819 lb.) counterweight; and 800-mm (32 in.) heavy-duty (HD) triple semi-grouser shoes

Operating Weight 38 100 kg (83,992 lb.)

Component Weights

Undercarriage, HD, with 800-mm (32 in.) HD Triple Semi-Grouser Shoes 13 550 kg (29,872 lb.)

HD One-Piece Boom (with arm cylinder) 3500 kg (7,806 lb.)

Arm with Bucket Cylinder and Linkage

3.2 m (10 ft. 6 in.) HD 1957 kg (4,315 lb.)

4.0 m (13 ft. 1 in.) 1898 kg (4,184 lb.)

Boom-Lift Cylinders (2), Total Weight 624 kg (1,376 lb.)

1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.) HD Bucket 1160 kg (2,557 lb.)

Counterweight, Standard 7629 kg (16,819 lb.)

Operating Dimensions

Arm Length 3.2 m (10 ft. 6 in.) HD 4.0 m (13 ft. 1 in.)

Arm Digging Force

SAE 177.6 kN (39,930 lb.) 152.6 kN (34,314 lb.)

ISO 185.0 kN (41,590 lb.) 159.0 kN (35,745 lb.)

Bucket Digging Force

SAE 225.2 kN (50,628 lb.) 225.2 kN (50,628 lb.)

ISO 246.0 kN (55,303 lb.) 246.0 kN (55,303 lb.)

A Maximum Reach 11.10 m (36 ft. 5 in.) 11.86 m (38 ft. 11 in.)

A' Maximum Reach at Ground Level 10.89 m (35 ft. 9 in.) 11.67 m (38 ft. 3 in.)

B Maximum Digging Depth 7.38 m (24 ft. 3 in.) 8.18 m (26 ft. 10 in.)


B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom 7.21 m (23 ft. 8 in.) 8.04 m (26 ft. 5 in.)

C Maximum Cutting Height 10.36 m (34 ft. 0 in.) 10.75 m (35 ft. 3 in.)


D Maximum Dumping Height 7.24 m (23 ft. 9 in.) 7.63 m (25 ft. 0 in.)

E Minimum Swing Radius 4.46 m (14 ft. 8 in.) 4.47 m (14 ft. 8 in.)

F Maximum Vertical Wall 6.42 m (21 ft. 1 in.) 7.27 m (23 ft. 10 in.)

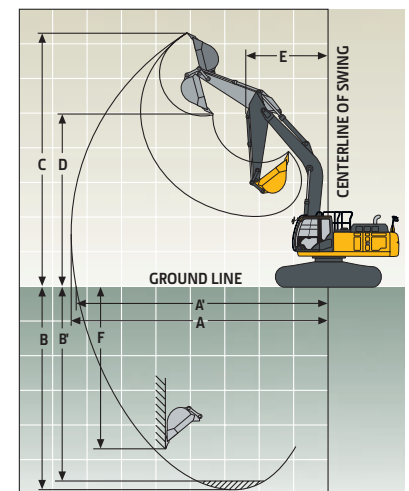

Machine Dimensions		380G LC	
Arm Length	3.2 (10 ft. 6 in.) HD	4.0 m (13 ft. 1 in.)	
A Overall Length	11.20 m (36 ft. 9 in.)	11.29 m (37 ft. 1 in.)	
B Overall Height	3.27 m (10 ft. 9 in.)	3.60 m (11 ft. 10 in.)	
C Rear-End Length/Swing Radius	3.60 m (11 ft. 10 in.)		
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)		
E Undercarriage Length	4.94 m (16 ft. 2 in.)		
F Counterweight Clearance	1.18 m (3 ft. 10 in.)		
G Upperstructure Width	2.99 m (9 ft. 10 in.)		
H Cab Height	3.17 m (10 ft. 5 in.)		
I Track Width	700 mm (28 in.) HD / 800 mm (32 in.) HD		
J Gauge Width	2.59 m (8 ft. 6 in.)		
K Ground Clearance	0.50 m (20 in.)		
L Overall Width with Shoes			
700 mm (28 in.) HD	3.29 m (10 ft. 10 in.)		
800 mm (32 in.) HD	3.39 m (11 ft. 2 in.)		

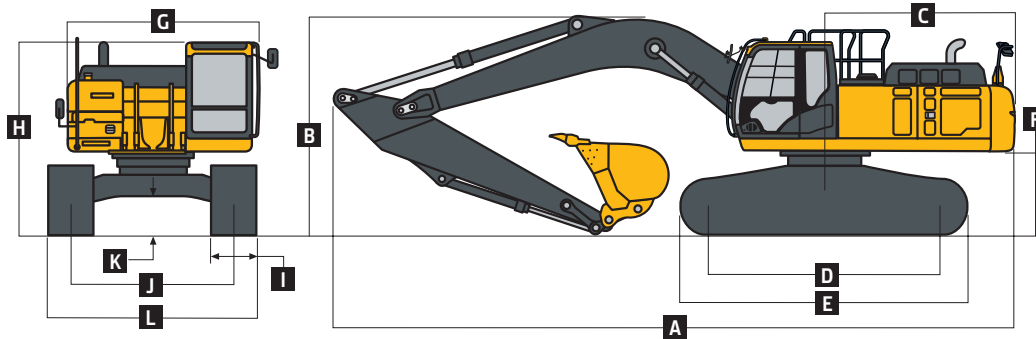

Lift Capacities

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 1270-kg (2,800 lb.) bucket and 800-mm (32 in.) HD shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.2-m (10 ft. 6 in.) HD arm</i>												
6.0 m (20 ft.)									7806	6710		
									(17,082)	(14,371)		
4.5 m (15 ft.)							9878	9578	8475	6515	6368	4579
							(21,357)	(20,618)	(18,430)	(13,985)		
3.0 m (10 ft.)					16 096	14 063	11 549	8981	9351	6241	7495	4479
					(34,555)	(30,342)	(24,944)	(19,352)	(20,278)	(13,410)	(16,066)	(9,578)
1.5 m (5 ft.)					18 594	13 091	12 991	8462	9974	5961	7360	4356
					(40,102)	(28,200)	(28,079)	(18,225)	(21,440)	(12,817)	(15,795)	(9,329)
Ground Line					19 348	12 683	13 792	8133	9747	5757	7262	4266
					(41,891)	(27,271)	(29,848)	(17,503)	(20,953)	(12,380)	(15,602)	(9,152)
-1.5 m (-5 ft.)			11 896	11 896			13 787	8003	9650	5670		
			(27,023)	(27,023)			(27,102)	(29,755)	(17,218)	(20,751)	(12,198)	
-3.0 m (-10 ft.)	14 227	14 227	19 619	19 619	17 190	12 755	12 828	8053	9604	5735		
	(31,928)	(31,928)	(44,624)	(44,624)	(37,195)	(27,413)	(27,670)	(17,335)	(20,489)	(12,369)		
-4.5 m (-15 ft.)			18 938	18 938	14 064	13 113	10 310	8318				
			(40,693)	(40,693)	(30,129)	(28,219)	(21,788)	(17,958)				
<i>With 4.0-m (13 ft. 1 in.) arm</i>												
7.5 m (25 ft.)												
6.0 m (20 ft.)									6939	6939	5716	4868
									(15,179)	(14,954)	(11,000)	(10,368)
4.5 m (15 ft.)									7721	6752	7114	4789
									(16,795)	(14,497)	(15,557)	(10,238)
3.0 m (10 ft.)					14 260	14 260	10 586	9333	9704	6451	7629	4642
					(30,632)	(30,632)	(22,873)	(20,101)	(18,928)	(13,862)	(16,451)	(9,938)
1.5 m (5 ft.)					17 458	13 633	12 311	8747	9704	6133	7490	4478
					(37,630)	(29,362)	(26,612)	(18,836)	(21,034)	(13,184)	(16,079)	(9,597)
Ground Line			6730	6730	19 133	12 967	13 503	8322	9874	5875	7341	4342
			(15,403)	(15,403)	(41,379)	(27,888)	(29,220)	(17,910)	(21,222)	(12,630)	(15,767)	(9,311)
-1.5 m (-5 ft.)	6799	6799	10 863	10 863	19 370	12 713	13 946	8095	9704	5722	7261	4268
	(15,210)	(15,210)	(24,660)	(24,660)	(41,953)	(27,321)	(29,966)	(17,412)	(20,858)	(12,303)	(15,610)	(9,166)
-3.0 m (-10 ft.)	11 387	11 387	16 293	16 293	18 425	12 723	13 529	8047	9672	5694		
	(25,561)	(25,561)	(36,911)	(36,911)	(39,871)	(27,341)	(29,232)	(17,314)	(20,804)	(12,255)		
-4.5 m (-15 ft.)	16 888	16 888	22 921	22 921	16 178	12 944	11 969	8177	8663	5840		
	(37,963)	(37,963)	(49,377)	(49,377)	(34,814)	(27,840)	(25,643)	(17,618)	(18,124)	(12,627)		
-6.0 m (-20 ft.)			16 336	16 336	11 807	11 807	7965	7965				
			(34,418)	(34,418)	(24,741)	(24,741)						


Buckets

380G LC

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere Fanggs™ teeth or ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force 3.2 m (10 ft. 6 in.) HD		Arm Dig Force 4.0 m (13 ft. 1 in.)		Bucket Tip Radius		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.	
Heavy Duty Plate Lip	914	36	1.13	1.5	971	2,140	225.2	496	177.6	392	152.6	337	1600	63.0	4
	1067	42	1.34	1.7	1003	2,212	225.2	496	177.6	392	152.6	337	1600	63.0	5
	1219	48	1.55	2.0	1055	2,326	225.2	496	177.6	392	152.6	337	1600	63.0	6
	1372	54	1.76	2.3	1161	2,559	225.2	496	177.6	392	152.6	337	1600	63.0	6
Heavy Duty High Capacity	760	30	0.96	1.3	1142	2,518	204.2	450	171.7	379	148.3	327	1765	69.5	4
	914	36	1.19	1.6	1263	2,783	204.2	450	171.7	379	148.3	327	1765	69.5	4
	1067	42	1.41	1.8	1416	3,123	204.2	450	171.7	379	148.3	327	1765	69.5	5
	1219	48	1.64	2.1	1506	3,321	204.2	450	171.7	379	148.3	327	1765	69.5	6
	1372	54	1.87	2.4	1617	3,565	204.2	450	171.7	379	148.3	327	1765	69.5	6

Bucket Selection Guide*

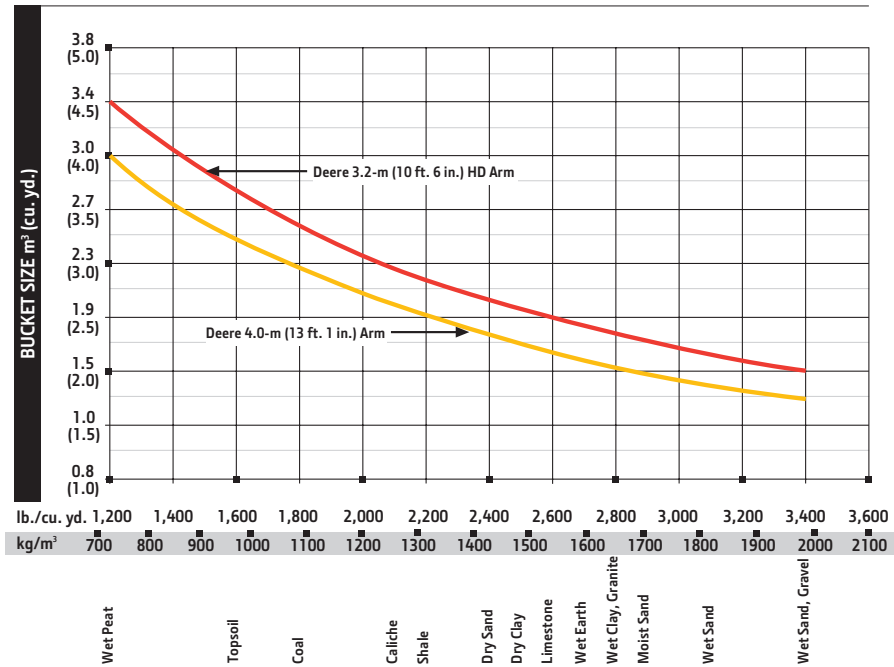

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

350G 380G Engine

● ●	Auto-idle system
● ●	Automatic belt-tension device
● ●	Batteries (2 – 12 volt)
● ●	Coolant recovery tank
● ●	Dual-element dry-type air filter
● ●	Electronic engine control
● ●	Enclosed fan guard (conforms to SAE J1308)
● ●	Engine coolant to –37 deg. C (–34 deg. F)
● ●	Programmable auto shutdown
● ●	Fuel filter with water separator
● ●	Full-flow oil filter
● ●	Turbocharger with charge air cooler
● ●	Cool-on-demand hydraulic-driven fan
● ●	500-hour engine-oil-change interval
● ●	70% (35 deg.) off-level capability
● ●	Engine-oil-sampling valve
▲ ▲	Chrome exhaust stack
▲ ▲	Electric ether starting aid
▲ ▲	Hydraulic fan reverser
▲ ▲	Engine coolant heater
▲ ▲	Severe-duty fuel filter

Hydraulic System

● ●	Reduced-drift valve for boom down, arm in
● ●	Auxiliary hydraulic valve section
● ●	Spring-applied, hydraulically released automatic swing brake
● ●	Auxiliary hydraulic-flow adjustments through monitor
● ●	Auto power lift
● ●	5,000-hour hydraulic-oil-change interval
● ●	Hydraulic-oil-sampling valve
▲ ▲	Auxiliary hydraulic lines
▲ ▲	Auxiliary pilot and electric controls
▲ ▲	Hydraulic filter restriction indicator kit
▲ ▲	Load-lowering control / Anti-drift device
▲ ▲	Single-pedal propel control
▲ ▲	Control pattern change valve

Undercarriage

● ●	Planetary drive with axial piston motors
● ●	Propel motor shields
● ●	Spring-applied, hydraulically released automatic propel brake
● ●	Track guides, front idler and 3 additional
● ●	2-speed propel with automatic shift
● ●	Upper carrier rollers (2)
● ●	Sealed and lubricated track chain
● ●	Triple semi-grouser shoes, 600 mm (24 in.)
● ●	Triple semi-grouser shoes, 700 mm (28 in.)

350G 380G Undercarriage (continued)

● ●	Single-bar shoes, 700 mm (28 in.) Heavy Duty (HD)
● ●	Triple semi-grouser shoes, 800 mm (32 in.)
● ●	Triple semi-grouser shoes, 800 mm (32 in.) HD
▲ ▲	Undercarriage frame opening guard

Upperstructure

● ●	Right-hand, left-hand, and counterweight mirrors
● ●	Vandal locks with ignition key: Cab door / Service doors / Toolbox
● ●	Debris screen in side panel
● ●	Remote-mounted engine oil and fuel filters
▲ ▲	“D” channel guard

Front Attachments

● ●	Centralized lubrication system
● ●	Dirt seals on all bucket pins
● ●	Less boom and arm
● ●	Oil-impregnated bushings
● ●	Reinforced resin thrust plates
● ●	Tungsten carbide thermal coating on arm-to-bucket joint
▲	Arm, 2.67 m (8 ft. 9 in.)
▲	Arm, 3.2 m (10 ft. 6 in.)
▲	Arm, 3.2 m (10 ft. 6 in.) HD
▲ ▲	Arm, 4.0 m (13 ft. 1 in.)
▲ ▲	Attachment quick-couplers
▲ ▲	Boom cylinder with plumbing to main-frame for less boom and arm
▲ ▲	Buckets: Heavy duty / Heavy-duty high capacity / Side cutters and teeth
▲ ▲	Material clamps
▲ ▲	Super-long fronts

Operator's Station

● ●	Adjustable independent-control positions (levers-to-seat, seat-to-pedals)
● ●	AM/FM radio
● ●	Auto climate control/air conditioner/heater/pressurizer
● ●	Built-in Operator's Manual storage compartment and manual
● ●	Cell-phone power outlet, 12 volt, 60 watt, 5 amp
● ●	Coat hook
● ●	Deluxe suspension cloth seat with 100-mm (4 in.) adjustable armrests
● ●	Floor mat
● ●	Front windshield wiper with intermittent speeds
● ●	Gauges (illuminated): Diesel Exhaust Fluid (DEF) / Engine coolant / Fuel
● ●	Horn, electric
● ●	Hourmeter, electric

350G 380G Operator's Station (continued)

● ●	Hydraulic shutoff lever, all controls
● ●	Hydraulic warm-up control
● ●	Interior light
● ●	Large cup holder
● ●	Machine Information Center (MIC)
● ●	Mode selectors (illuminated): Power modes – 3 / Travel modes – 2 with automatic shift / Work mode – one
● ●	Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, low DEF indication with audible alarm, fault code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator
● ●	Motion alarm with cancel switch (conforms to SAE J994)
● ●	Power-boost switch on right console lever
● ●	Auxiliary hydraulic control switches in right console lever
● ●	SAE 2-lever control pattern
● ●	Seat belt, 51 mm (2 in.), retractable
● ●	Tinted glass
● ●	Transparent tinted overhead hatch
● ●	Hot/cold beverage compartment
▲ ▲	Air-suspension heated seat
▲ ▲	Hydraulic oil filter restriction indicator light
▲ ▲	Protection screens for cab front, rear, and side
▲ ▲	Seat belt, 76 mm (3 in.), non-retractable
▲ ▲	Window vandal-protection covers

Electrical

● ●	100-amp alternator
● ●	Blade-type multi-fused circuits
● ●	Positive-terminal battery covers
● ●	JDLINK™ wireless communication system (available in specific countries; see your dealer for details)
▲ ▲	Rearview camera
▲ ▲	Cab extension wiring harness

Lights

● ●	Work lights: Halogen / One mounted on boom / One mounted on frame
▲ ▲	2 lights mounted on cab / One mounted on right side of boom / One mounted under engine hood

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with 1370-mm (54 in.) buckets, full fuel tanks, and 79-kg (175 lb.) operators; a 350G LC unit with 6928-kg (15,274 lb.) counterweight and 800-mm (32 in.) triple semi-grouser shoes; and a 380G LC unit with 7629-kg (16,819 lb.) counterweight and 800-mm (32 in.) heavy-duty triple semi-grouser shoes.



350G LC/380G LC

35–38 metric ton



JOHN DEERE



Put more work within reach.

Whether you're loading trucks, digging trenches, demolishing structures, or placing pipe, you'll get more done with our G-Series Excavators. Their rugged EPA Final Tier 4 (FT4)/EU Stage IV PowerTech™ diesel engines meet rigid emission regulations, enabling you to work, everywhere there's work — without compromising power, reliability, or ease of operation. Customer-inspired refinements include a comfortable, spacious cab. And an enhanced LCD monitor with simplified navigation that lets an operator easily dial-in a wealth of machine information and functionality. Exceptional power, smoothness, and ease of operation — the 350G LC and 380G LC deliver all you've come to expect in John Deere excavators. And then some.





Key specifications	350G LC	380G LC
Net rated power	202 kW (271 hp)	202 kW (271 hp)
Operating weight	35 650 kg (78,550 lb.)	38 100 kg (83,992 lb.)
Maximum digging depth	8.18 m (26 ft. 10 in.)	8.18 m (26 ft. 10 in.)
Arm digging force	152.6–159.0 kN (34,314–35,745 lb.)	152.6–159.0 kN (34,314–35,745 lb.)
Bucket digging force	225.2–246.0 kN (50,628–55,303 lb.)	225.2–246.0 kN (50,628–55,303 lb.)



Work harder. And smarter.

Who says you have to choose between working harder and working smarter? With our engine/hydraulic management system commanding impressive hydraulic muscle, these excavators do both — putting that extra ability to work with typically smooth operation and finesse. Add to this three power modes and power boost, and these excavators provide everything you need to give productivity an extra push. Combining brawn and brains, our G-Series is a wise choice.



Powerwise™ III perfectly balances engine performance and hydraulic flow for predictable operation. Three productivity modes allow you to choose the digging style that fits the job. **High-productivity** delivers more power and faster hydraulic response to move more material. **Power** delivers a balance of power, speed, and fuel economy for normal operation. **Economy** limits top speed and helps save fuel.


Choose from a variety of track widths, arm lengths, buckets, high-flow auxiliary hydraulic packages, and numerous other options.


Need extra stability or lift capacity? Opt for the 380G LC. Its standard heavy-duty boom, 3.2-m (10 ft. 6 in.) heavy-duty arm, and undercarriage provide the stamina and strength to handle demanding pipeline, demolition, and scrap-handling tasks.

1. Low-effort joysticks, unmatched metering, and smooth multifunction operation deliver the control and finesse you need for utility work.

2. Generous flow, arm force, and swing torque help speed cycles. So you can do your best to stay on schedule or ahead of the weather.

3. When the task calls for a little extra, simply press the power-boost button on the right-hand control and muscle through.

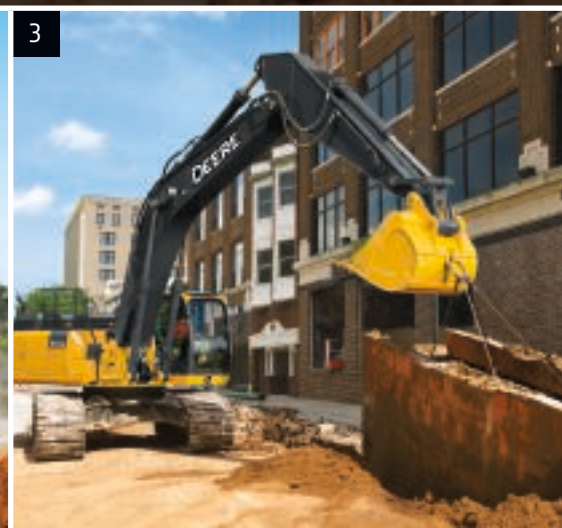

The image shows the interior of a G-Series Excavator cab. It features a grey fabric-covered high-back seat on the right. In the center, there is a control panel with a rotary monitor on the left, a joystick, and various buttons. A red-handled screwdriver is resting on the joystick. To the left of the seat, there is a cup holder with a metal cup. The background shows yellow hydraulic components and warning labels. The overall design is functional and ergonomic.

Operating ease takes a turn for the better.

G-Series Excavators make it easy for your operators to “dial things up.” The refined monitor employs a rotary control that makes it quick and easy to tap into an abundance of performance and convenience functions and features. Operators will also appreciate the comfortable fabric-covered high-back seat and increased legroom in the spacious, well-appointed cab. As always, unsurpassed all-round visibility, low-effort joysticks, a highly efficient HVAC system, and numerous other amenities provide everything needed to do your best work.



Spacious cab is comfortable and noticeably quiet. Silicone-filled mounts effectively isolate operators from noise and vibration.

We've got your back with a sculpted mechanical-suspension high-back seat. Seat has 267 mm (10½ in.) of travel, sliding together or independent of the joystick console. So it won't cramp an operator's style. For even more support and comfort, opt for the air-suspension heated seat.

Ergonomically correct short-throw pilot levers provide smooth, predictable fingertip control with less movement or effort. Push-buttons in the right lever allow fingertip control of auxiliary hydraulic flow for operating attachments.

No shortage of storage in here. There's a place for a cooler, cup holders, and even a hot/cold box that keeps beverages at just the right temperature.

Optional cab and right-side boom lights provide extra illumination to extend your workday beyond daylight hours.

A new hood design ensures optimal visibility to the sides and rear, even with the increased under-the-hood space requirements of EPA Final Tier 4 (FT4)/EU Stage IV components.

1. Multi-language LCD monitor and rotary dial provide intuitive access to a wealth of information and functions. Just turn and tap to select work mode, access operating info, check maintenance intervals, source diagnostic codes, adjust cab temperature, and tune the radio. Plus much more.
2. Wide expanse of front and side glass, narrow front cab posts, large overhead glass, and numerous mirrors provide virtually unobstructed all-around visibility. If you need to see more, choose the optional camera that displays the action behind on the monitor.
3. Automatic, high-velocity bi-level climate-control system with automotive-style adjustable louvers helps keep the glass clear and the cab comfortable.



Nothing runs like a Deere, because nothing is built like one.

When you've got places to go, people to see, and schedules to keep, you need dependable workers like these. Built to deliver unsurpassed uptime, these go-getters employ many of the same job-proven digging structures and hydraulic, electrical, and undercarriage components as their highly regarded predecessors. You'll also continue to profit from durability-enhancing "extras" such as tungsten-carbide-coated wear surfaces, welded-boom bulkheads, wet-sleeve engine liners, and extended service intervals. When you know how they're built, you'll run a Deere.

Graphite-iron wet-sleeve cylinder liners, mono-steel pistons, and large-diameter connecting rods ensure long-term engine durability.

Oil-impregnated bushings enhance durability and extend grease intervals to 500 hours for the arm-and-boom joint and 100 hours for the bucket joint.

Tungsten-carbide coating creates an extremely wear-resistant surface to protect the all-important bucket-to-arm joint.


Grooved bushings and thermal-coated bucket joints increase arm- and boom-lube intervals to 500 hours.

1. Thick-plate single-sheet mainframe, box-section track frames, and industry-exclusive double-seal swing bearing deliver rock-solid durability.

2. With large idlers, rollers, and strutted links, the sealed and lubricated undercarriage delivers long and reliable performance.

3. Highly efficient, heavy-duty cooling system keeps things cool, even in tough environments or high altitudes.

4. Reinforced D-channel side frames provide maximum cab and component protection.

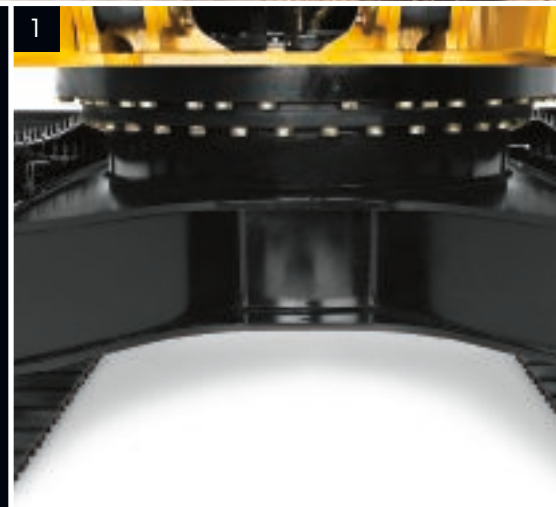




John Deere PowerTech EPA Final Tier 4 (FT4)/EU Stage IV diesel engines meet emission regulations without sacrificing power or torque. We built on our Interim Tier 4 (IT4)/Stage IIIB solution to deliver the best combination of performance, efficiency, and reliability. Our field-proven technology is simple, fluid efficient, fully integrated, and fully supported. It employs field-proven cooled exhaust gas recirculation (EGR), easy-to-maintain high-uptime exhaust filters, and selective catalytic reduction (SCR).

A John Deere exclusive, three welded bulkheads within the boom resist torsional stress for unsurpassed durability.

The optional grade-reference system includes sensor mounts to help speed installation, eliminating the need to grind, weld, and repaint. Our open-architecture system design allows you to employ your favorite brand of grade-control system to help maximize productivity and uptime while lowering daily operating costs.

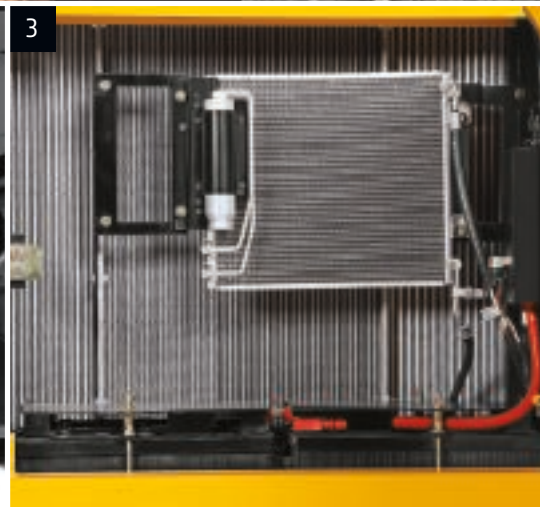

2

3

4

Seeking simplified maintenance? You'll become a big fan of the G-Series.

Swing open the side panels and you'll discover many of the numerous ways these excavators can minimize maintenance, increase uptime, and reduce daily operating costs. The hydraulically driven fan runs only as fast or often as needed, reducing fuel consumption and wear-causing debris flow through the cooler cores. Grouped service points make quick work of the daily routine. Easy-to-check sight gauges and fluid reservoirs. Quick-change remote-mounted filters. Convenient fluid-sample ports and advanced self-diagnostics — with time- and money-saving advantages such as these, and a dealer-customized Ultimate Uptime package to help optimize your operation, there's more to like.

1. LCD monitor tracks scheduled maintenance intervals and issues reminders, including DPF servicing. Should a problem arise, it provides diagnostic information to help decrease downtime.
2. Diagnostic displays and fluid-sample ports help speed preventative maintenance and troubleshooting.
3. Vertical spin-on engine oil and fuel filters are conveniently located in the right rear compartment for easy ground-level servicing.
4. Ground-level fresh-air cab filter is quickly serviced from outside the cab. Where it's more likely to get done.
5. Centralized lube banks place difficult-to-lube zerks within easy reach. They make greasing less messy and time consuming, too.
6. Cooler cores' 10-fin-per-inch spacing lets trash easily pass to resist plugging. Swing-out coolers provide added core access.



1

Engine Oil Filter	
Previous Maintenance	
2013/06/06	0.0h
Remains	498.8h
Maintenance Interval	500.0h






A second door has been added to the right side of the machine to provide even more wide-open access to components.

Optional reversing fan back-blows cooler cores to reduce debris buildup. It's a welcome addition that helps increase uptime.

Auto-idle automatically reduces engine speed when hydraulics aren't in use. Auto-shutdown further preserves precious fuel.

Ash-service intervals for the diesel particulate filter (DPF) are condition based, meaning the machine will notify the operator before service is required. Typically, ash service is not necessary until the first engine overhaul depending on machine application and maintenance practices. FT4 components are warranted for 10,000 hours.

Large fuel tanks and 500- and 5,000-hour engine and hydraulic oil-service intervals decrease downtime for routine maintenance. Fluid-level sight gauges are conveniently located and can be checked at a glance.

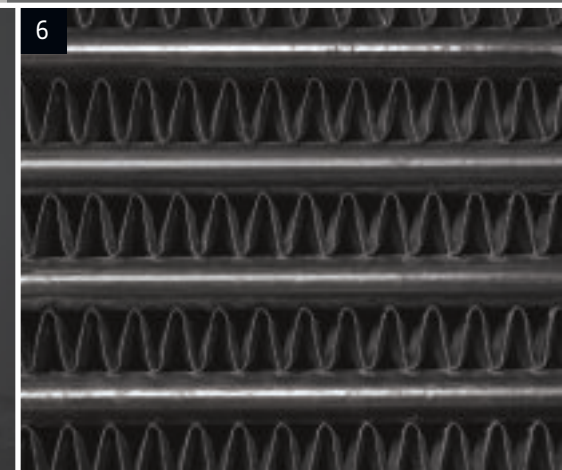

350G LC



Engine	350G LC		
	Base engine for use in U.S. and U.S. Territories		
Manufacturer and Model	John Deere PowerTech™ PSS 9.0 L		
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV		
Net Rated Power (ISO 9249)	202 kW (271 hp) at 1,900 rpm		
Cylinders	6		
Displacement	9.0 L (549 cu. in.)		
Off-Level Capacity	70% (35 deg.)		
Aspiration	Series turbocharged, air-to-air charge-air cooler		
Cooling			
	Cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive		
Powertrain			
	2-speed propel with automatic shift		
Maximum Travel Speed			
Low	3.2 km/h (2.0 mph)		
High	5.0 km/h (3.1 mph)		
Drawbar Pull	30 350 kg (66,900 lb.)		
Hydraulics			
	Open center, load sensing		
Main Pumps	2 variable-displacement pumps		
Maximum Rated Flow	288 L/m (76.1 gpm) x 2		
Pilot Pump	One gear		
Maximum Rated Flow	30.2 L/m (8.0 gpm)		
Pressure Setting	3900 kPa (566 psi)		
System Operating Pressure			
Circuits			
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
	<i>Bore</i>	<i>Rod Diameter</i>	<i>Stroke</i>
Boom (2)	145 mm (5.7 in.)	100 mm (3.9 in.)	1520 mm (59.8 in.)
Arm (1)	170 mm (6.7 in.)	115 mm (4.5 in.)	1740 mm (68.5 in.)
Bucket (1)	140 mm (5.5 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Mass-Excavating (ME) Bucket (1)	145 mm (5.7 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	1,400 CCA		
Alternator Rating	100 amp		
Work Lights	2 halogen (one mounted on boom, one on frame)		
Undercarriage			
Rollers (each side)			
Carrier	2		
Track	8		
Shoes, Triple Semi-Grousers (each side)	48		
Track			
Adjustment	Hydraulic		
Guides	3 per side		
Chain	Sealed and lubricated		
Ground Pressure			
800-mm (32 in.) Triple Semi-Grouser Shoes	50.1 kPa (7.27 psi)		



Swing Mechanism	350G LC
Speed	10.7 rpm
Torque	120 000 Nm (88,500 lb.-ft.)

Serviceability

Refill Capacities	
Fuel Tank	628 L (166 gal.)
Diesel Exhaust Fluid (DEF) Tank	35 L (9.3 gal.)
Cooling System	39.7 L (10.5 gal.)
Engine Oil with Filter	27 L (7.2 gal.)
Hydraulic Tank	193 L (51 gal.)
Hydraulic System	290 L (77 gal.)
Swing Drive	11.8 L (12.5 qt.)
Gearbox	
Propel (each)	8.5 L (9.0 qt.)
Pump Drive	1.1 L (1.2 qt.)


Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 6928-kg (15,274 lb.) counterweight; and 800-mm (32 in.) triple semi-grouser shoes

Operating Weight	35 650 kg (78,550 lb.)
------------------	------------------------

Component Weights

Undercarriage with 800-mm (32 in.) Triple Semi-Grouser Shoes	12 750 kg (28,100 lb.)
One-Piece Boom (with arm cylinder)	
6.4 m (21 ft. 0 in.)	3031 kg (6,682 lb.)
5.7-m (18 ft. 8 in.) ME	3234 kg (7,130 lb.)
Arm with Bucket Cylinder and Linkage	
2.1 m (6 ft. 10 in.) ME	1821 kg (4,015 lb.)
2.67 m (8 ft. 9 in.) Heavy-Duty (HD)	1909 kg (4,209 lb.)
3.2 m (10 ft. 6 in.)	1758 kg (3,876 lb.)
4.0 m (13 ft. 1 in.)	1898 kg (4,184 lb.)
Boom-Lift Cylinders (2), Total Weight	624 kg (1,376 lb.)
1.76-m ³ (2.3 cu. yd.), 1370-mm (54 in.) HD Bucket	1160 kg (2,557 lb.)
Counterweight, Standard	6928 kg (15,274 lb.)

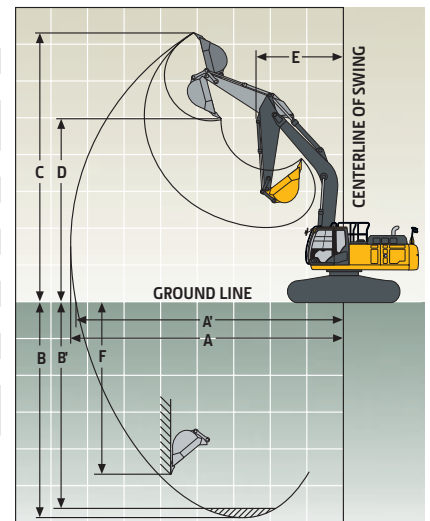


Operating Dimensions

Arm Length	2.1 m (6 ft. 10 in.) ME /	2.67 m (8 ft. 9 in.) HD /	2.67 m (8 ft. 9 in.) HD /	3.2 m (10 ft. 6 in.) /	4.0 m (13 ft. 1 in.) /
	5.7-m (18 ft. 8 in.)	5.7-m (18 ft. 8 in.)	6.4-m (21 ft. 0 in.)	6.4-m (21 ft. 0 in.)	6.4-m (21 ft. 0 in.)
	Boom Length	Boom Length	Boom Length	Boom Length	Boom Length
Arm Digging Force					
SAE	275.0 kN (45,914 lb.)	213.0 kN (45,914 lb.)	204.2 kN (45,914 lb.)	177.6 kN (39,930 lb.)	152.6 kN (34,314 lb.)
ISO	288.0 kN (64,745 lb.)	222.0 kN (49,908 lb.)	222.0 kN (49,908 lb.)	185.0 kN (41,590 lb.)	159.0 kN (35,745 lb.)
Bucket Digging Force					
SAE	229.0 kN (50,628 lb.)	214.0 kN (50,628 lb.)	225.2 kN (50,628 lb.)	225.2 kN (50,628 lb.)	225.2 kN (50,628 lb.)
ISO	264.0 kN (59,350 lb.)	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)
A Maximum Reach	9.41 m (30 ft. 10 in.)	9.93 m (32 ft. 7 in.)	10.57 m (34 ft. 8 in.)	11.10 m (36 ft. 5 in.)	11.86 m (38 ft. 11 in.)
A' Maximum Reach at Ground Level	9.16 m (30 ft. 1 in.)	9.69 m (31 ft. 9 in.)	10.36 m (34 ft. 0 in.)	10.89 m (35 ft. 9 in.)	11.67 m (38 ft. 3 in.)
B Maximum Digging Depth	5.62 m (18 ft. 5 in.)	6.22 m (20 ft. 5 in.)	6.84 m (22 ft. 5 in.)	7.38 m (24 ft. 3 in.)	8.18 m (26 ft. 10 in.)
B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom	5.39 m (17 ft. 8 in.)	6.02 m (19 ft. 9 in.)	6.64 m (21 ft. 9 in.)	7.21 m (23 ft. 8 in.)	8.04 m (26 ft. 5 in.)
C Maximum Cutting Height	9.43 m (30 ft. 11 in.)	9.66 m (31 ft. 8 in.)	9.99 m (32 ft. 9 in.)	10.36 m (34 ft. 0 in.)	10.75 m (35 ft. 3 in.)
D Maximum Dumping Height	6.39 m (21 ft. 0 in.)	6.60 m (21 ft. 8 in.)	6.94 m (22 ft. 9 in.)	7.24 m (23 ft. 9 in.)	7.63 m (25 ft. 0 in.)
E Minimum Swing Radius	4.04 m (13 ft. 3 in.)	4.05 m (13 ft. 3 in.)	4.61 m (15 ft. 1 in.)	4.46 m (14 ft. 8 in.)	4.47 m (14 ft. 8 in.)
F Maximum Vertical Wall	4.15 m (13 ft. 7 in.)	4.78 m (15 ft. 8 in.)	5.51 m (18 ft. 1 in.)	6.42 m (21 ft. 1 in.)	7.27 m (23 ft. 10 in.)

Machine Dimensions **350G LC**

Arm Length	2.1 m (6 ft. 10 in.) ME / 5.7-m (18 ft. 8 in.) Boom Length	2.67 m (8 ft. 9 in.) HD / 5.7-m (18 ft. 8 in.) Boom Length	2.67 m (8 ft. 9 in.) HD / 6.4-m (21 ft. 0 in.) Boom Length	3.2 m (10 ft. 6 in.) / 6.4-m (21 ft. 0 in.) Boom Length	4.0 m (13 ft. 1 in.) / 6.4-m (21 ft. 0 in.) Boom Length
A Overall Length	10.99 m (36 ft. 1 in.)	11.33 m (37 ft. 2 in.)	11.35 m (37 ft. 3 in.)	11.20 m (36 ft. 9 in.)	11.29 m (37 ft. 0 in.)
B Overall Height	3.68 m (12 ft. 1 in.)	3.47 m (11 ft. 5 in.)	3.47 m (11 ft. 5 in.)	3.27 m (10 ft. 9 in.)	3.60 m (11 ft. 10 in.)
C Rear-End Length/Swing Radius	3.60 m (11 ft. 10 in.)				
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)				
E Undercarriage Length	4.94 m (16 ft. 2 in.)				
F Counterweight Clearance	1.18 m (3 ft. 10 in.)				
G Upperstructure Width	2.99 m (9 ft. 10 in.)				
H Cab Height	3.14 m (10 ft. 4 in.)				
I Track Width with Shoes	600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.)				
J Gauge Width	2.59 m (8 ft. 6 in.)				
K Ground Clearance	0.50 m (20 in.)				
L Overall Width with Shoes	600 mm (24 in.) 3.19 m (10 ft. 6 in.) 700 mm (28 in.) 3.29 m (10 ft. 10 in.) 800 mm (32 in.) 3.39 m (11 ft. 2 in.)				

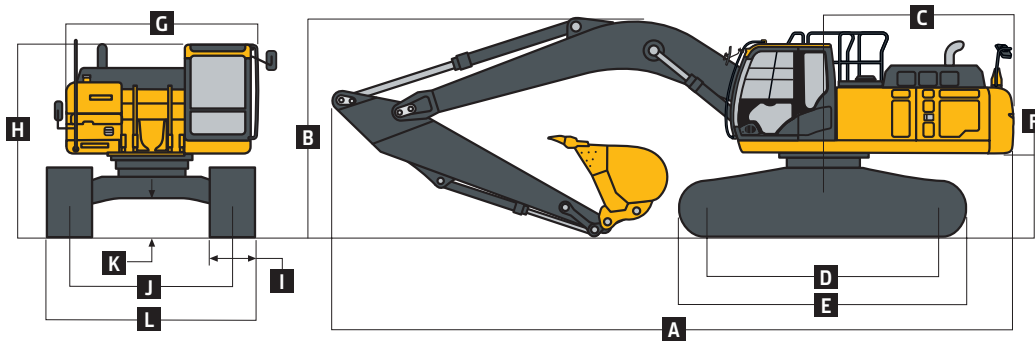

Lift Capacities

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
6.0 m (20 ft.)							10 841	8528	(23,900)	(18,800)		
4.5 m (15 ft.)					14 674	13 245	11 635	8187	(32,350)	(29,200)	(25,650)	(18,050)
3.0 m (10 ft.)							12 859	7756	(28,350)	(17,100)	8981	5330
1.5 m (5 ft.)							12 701	7371	(28,000)	(16,250)	8800	5194
Ground Line					19 028	11 249	12 474	7189	(41,950)	(24,800)	(27,500)	(15,850)
-1.5 m (-5 ft.)			21 818	21 818	17 305	11 317	12 496	7212	(48,100)	(48,100)	(38,150)	(24,950)
-3.0 m (-10 ft.)			17 463	17 463	13 676	11 657			(38,500)	(38,500)	(30,150)	(25,700)

Lift Capacities (continued) 350G LC

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height Horizontal Distance from Centerline of Rotation	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 2.67-m (8 ft. 9 in.) HD arm, 5.7-m (18 ft. 8 in.) ME boom, and 1273-kg (2,806 lb.) bucket</i>												
6.0 m (20 ft.)							9888	8732				
							(21,800)	(19,250)				
4.5 m (15 ft.)					13 404	13 404	10 864	8391	9299	5625		
					(29,550)	(29,550)	(23,950)	(18,500)	(20,500)	(12,400)		
3.0 m (10 ft.)					16 579	12 565	12 270	7938	9095	5420		
					(36,550)	(27,700)	(27,050)	(17,500)	(20,050)	(11,950)		
1.5 m (5 ft.)					18 847	11 725	12 859	7507	8868	5239		
					(41,550)	(25,850)	(28,350)	(16,550)	(19,550)	(11,550)		
Ground Line					19 323	11 362	12 565	7235	8732	5103		
					(42,600)	(25,050)	(27,700)	(15,950)	(19,250)	(11,250)		
-1.5 m (-5 ft.)			19 686	19 686	18 189	11 340	12 474	7189				
			(43,400)	(43,400)	(40,100)	(25,000)	(27,500)	(15,850)				
-3.0 m (-10 ft.)			20 752	20 752	15 377	11 544	10 977	7348				
			(45,750)	(45,750)	(33,900)	(25,450)	(24,200)	(16,200)				
<i>With 2.67-m (8 ft. 9 in.) HD arm, 6.4-m (21 ft. 0 in.) boom, and 1170-kg (2,580 lb.) bucket</i>												
6.0 m (20 ft.)							9496	9213	8705	6162		
							(20,636)	(19,803)	(19,093)	(13,179)		
4.5 m (15 ft.)					14 206	14 021	10 894	8801	9279	6021		
					(30,447)	(30,255)	(23,562)	(18,960)	(20,190)	(12,922)		
3.0 m (10 ft.)					17 742	12 827	12 506	8285	9573	5798		
					(38,067)	(27,693)	(27,011)	(17,857)	(20,571)	(12,462)		
1.5 m (5 ft.)							13 399	7868	9319	5570		
							(36,850)	(26,125)	(28,794)	(16,949)	(20,037)	(11,982)
Ground Line					18 814	11 932	13 127	7634	9155	5423		
					(42,867)	(25,647)	(28,197)	(16,432)	(19,685)	(11,666)		
-1.5 m (-5 ft.)			12 495	12 495	18 754	11 959	13 059	7575	9117	5389		
			(28,545)	(28,545)	(40,705)	(25,693)	(28,045)	(16,301)	(19,617)	(11,605)		
-3.0 m (-10 ft.)			21 868	21 868	16 665	12 147	12 606	7679				
			(47,544)	(47,544)	(36,066)	(26,109)	(27,142)	(16,540)				
-4.5 m (-15 ft.)			16 500	16 500	12 776	12 551						
			(35,354)	(35,354)	(27,209)	(27,027)						
<i>With 2.67-m (8 ft. 9 in.) HD arm, 6.4-m (21 ft. 0 in.) boom, and 1273-kg (2,806 lb.) bucket</i>												
6.0 m (20 ft.)							9117	8596	8482	5693		
							(20,100)	(18,950)	(18,700)	(12,550)		
4.5 m (15 ft.)					13 449	13 109	10 387	8142	8913	5534		
					(29,650)	(28,900)	(22,900)	(17,950)	(19,650)	(12,200)		
3.0 m (10 ft.)					16 874	11 884	11 929	7620	8890	5284		
					(37,200)	(26,200)	(26,300)	(16,800)	(19,600)	(11,650)		
1.5 m (5 ft.)					17 055	11 158	12 474	7212	8641	5058		
					(37,600)	(24,600)	(27,500)	(15,900)	(19,050)	(11,150)		
Ground Line					19 006	10 932	12 202	6963	8482	4899		
					(41,900)	(24,100)	(26,900)	(15,350)	(18,700)	(10,800)		
-1.5 m (-5 ft.)			13 177	13 177	18 030	10 954	12 134	6895	8459	4876		
			(29,050)	(29,050)	(39,750)	(24,150)	(26,750)	(15,200)	(18,650)	(10,750)		
-3.0 m (-10 ft.)			21 001	21 001	15 944	11 158	11 975	7008				
			(46,300)	(46,300)	(35,150)	(24,600)	(26,400)	(15,450)				
-4.5 m (-15 ft.)			15 490	15 490	11 952	11 612						
			(34,150)	(34,150)	(26,350)	(25,600)						

Lift Capacities (continued) 350G LC

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.2-m (10 ft. 6 in.) arm, 6.4-m (21 ft. 0 in.) boom, and 1170-kg (2,580 lb.) bucket</i>												
6.0 m (20 ft.)									8008	6249		
									(17,528)	(13,381)		
4.5 m (15 ft.)							10 108	8940	8700	6077	6425	4268
							(21,858)	(19,242)	(18,923)	(13,042)		
3.0 m (10 ft.)					16 457	13 179	11 834	8402	9604	5832	7003	4180
					(35,331)	(28,428)	(25,561)	(18,102)	(20,664)	(12,529)	(15,009)	(8,936)
1.5 m (5 ft.)					19 033	12 300	13 321	7933	9338	5579	6882	4069
					(41,053)	(26,492)	(28,796)	(17,084)	(20,070)	(11,995)	(14,768)	(8,714)
Ground Line					19 818	11 930	13 140	7635	9132	5395	6794	3988
					(42,912)	(25,649)	(28,219)	(16,430)	(19,628)	(11,598)	(14,592)	(8,553)
-1.5 m (-5 ft.)			11 956	11 956	19 291	11 864	13 002	7516	9042	5314		
			(27,138)	(27,138)	(41,824)	(25,490)	(27,916)	(16,168)	(19,442)	(11,431)		
-3.0 m (-10 ft.)	14 280	14 280	19 673	19 673	17 649	11 988	13 051	7558	9105	5371		
	(32,048)	(32,048)	(44,674)	(44,674)	(38,194)	(25,762)	(28,032)	(16,269)	(19,608)	(11,580)		
-4.5 m (-15 ft.)			19 521	19 521	14 491	12 307	10 645	7794				
			(41,956)	(41,956)	(31,054)	(26,481)	(22,511)	(16,823)				
<i>With 4.0-m (13 ft. 1 in.) arm, 6.4-m (21 ft. 0 in.) boom, and 1170-kg (2,580 lb.) bucket</i>												
7.5 m (25 ft.)									(14,716)	(13,856)		
6.0 m (20 ft.)									7015	6409	5727	4442
									(15,348)	(13,734)	(11,021)	(9,453)
4.5 m (15 ft.)									7813	6203	7212	4370
									(16,997)	(13,312)	(15,462)	(9,335)
3.0 m (10 ft.)					14 409	13 717	10 708	8612	8838	5923	7070	4234
					(30,952)	(29,563)	(23,138)	(18,543)	(19,174)	(12,721)	(15,160)	(9,058)
1.5 m (5 ft.)					17,673	12 624	12 469	8065	9401	8626	6904	4082
					(38,094)	(27,185)	(26,955)	(17,362)	(20,198)	(12,090)	(14,815)	(8,741)
Ground Line			6735	6735	19 386	12 004	13 195	7669	9133	5386	6766	3955
			(15,416)	(15,416)	(41,927)	(25,812)	(28,331)	(16,500)	(19,623)	(11,573)	(14,526)	(8,476)
-1.5 m (-5 ft.)	6807	6807	10 880	10 880	19 638	11 769	12 949	7458	8974	5244	6692	3887
	(15,227)	(15,227)	(24,662)	(24,662)	(42,536)	(25,286)	(27,797)	(16,037)	(19,285)	(11,269)	(14,381)	(8,342)
-3.0 m (-10 ft.)	11 398	11 398	16 291	16 291	18 694	11 779	12 899	7414	8945	5218		
	(25,572)	(25,572)	(36,941)	(36,941)	(40,455)	(25,307)	(27,693)	(15,947)	(19,236)	(11,226)		
-4.5 m (-15 ft.)	16 873	16 873	23 293	23 293	16 436	11 987	12 165	7536	8817	5356		
	(38,021)	(38,021)	(50,183)	(50,183)	(35,373)	(25,775)	(26,067)	(16,233)	(18,456)	(11,576)		
-6.0 m (-20 ft.)			16 669	16 669	12 038	12 038	8137	7927				
			(35,135)	(35,135)	(25,239)	(25,239)						


Buckets

350G LC

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere Fanggs™ teeth or ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force, 2.67 m (8 ft. 9 in.) HD		Arm Dig Force, 3.2 m (10 ft. 6 in.)		Arm Dig Force, 4.0 m (13 ft. 1 in.)		Bucket Tip Radius		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.	
Heavy Duty Plate Lip	914	36	1.13	1.5	971	2,140	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	4
	1067	42	1.34	1.7	1003	2,212	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	5
	1219	48	1.55	2.0	1055	2,326	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	6
	1372	54	1.76	2.3	1161	2,559	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	6
Heavy Duty High Capacity	760	30	0.96	1.3	1142	2,518	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	4
	914	36	1.19	1.6	1263	2,783	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	4
	1067	42	1.41	1.8	1416	3,123	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	5
	1219	48	1.64	2.1	1506	3,321	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	6
	1372	54	1.87	2.4	1617	3,565	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	6

Bucket Selection Guide*

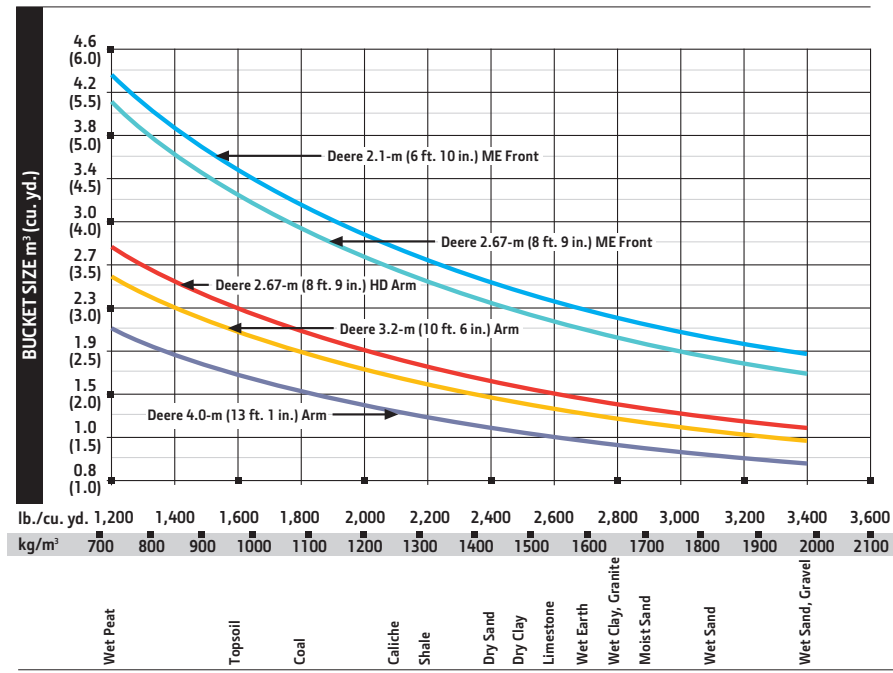

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

380G LC

Engine	380G LC		
	Base engine for use in U.S. and U.S. Territories		
Manufacturer and Model	John Deere PowerTech™ PSS 9.0 L		
Non-Road Emission Standard	EPA Final Tier 4/EU Stage IV		
Net Rated Power (ISO 9249)	202 kW (271 hp) at 1,900 rpm		
Cylinders	6		
Displacement	9.0 L (549 cu. in.)		
Off-Level Capacity	70% (35 deg.)		
Aspiration	Series turbocharged, air-to-air charge-air cooler		
Cooling			
	Cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive		
Powertrain			
	2-speed propel with automatic shift		
Maximum Travel Speed			
Low	3.2 km/h (2.0 mph)		
High	5.0 km/h (3.1 mph)		
Drawbar Pull	30 350 kg (66,900 lb.)		
Hydraulics			
	Open center, load sensing		
Main Pumps	2 variable-displacement pumps		
Maximum Rated Flow	288 L/m (76.1 gpm) x 2		
Pilot Pump	One gear		
Maximum Rated Flow	30.2 L/m (8.0 gpm)		
Pressure Setting	3900 kPa (566 psi)		
System Operating Pressure			
Circuits			
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
	<i>Bore</i>	<i>Rod Diameter</i>	<i>Stroke</i>
Boom (2)	145 mm (5.7 in.)	100 mm (3.9 in.)	1520 mm (59.8 in.)
Arm (1)	170 mm (6.7 in.)	115 mm (4.5 in.)	1740 mm (68.5 in.)
Bucket (1)	140 mm (5.5 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	1,400 CCA		
Alternator Rating	100 amp		
Work Lights	2 halogen (one mounted on boom, one on frame)		
Undercarriage			
Rollers (each side)			
Carrier	2		
Track	8		
Shoes, Triple Semi-Grousers (each side)	48		
Track			
Adjustment	Hydraulic		
Guides	3 per side		
Chain	Sealed and lubricated		



Ground Pressure 380G LC

800-mm (32 in.) Triple Semi-Grouser Shoes 53.5 kPa (7.77 psi)

Swing Mechanism

Speed 10.7 rpm

Torque 120 000 Nm (88,507 lb.-ft.)

Serviceability

Refill Capacities

Fuel Tank 628 L (166 gal.)

Diesel Exhaust Fluid (DEF) Tank 35 L (9.3 gal.)

Cooling System 39.7 L (10.5 gal.)

Engine Oil with Filter 27 L (7.2 gal.)

Hydraulic Tank 193 L (51 gal.)

Hydraulic System 290 L (77 gal.)

Swing Drive 11.8 L (12.5 qt.)

Gearbox

Propel (each) 8.5 L (9.0 qt.)

Pump Drive 1.1 L (1.2 qt.)

Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 7629-kg (16,819 lb.) counterweight; and 800-mm (32 in.) heavy-duty (HD) triple semi-grouser shoes

Operating Weight 38 100 kg (83,992 lb.)

Component Weights

Undercarriage, HD, with 800-mm 13 550 kg (29,872 lb.)

(32 in.) HD Triple Semi-Grouser Shoes

HD One-Piece Boom (with arm cylinder) 3500 kg (7,806 lb.)

Arm with Bucket Cylinder and Linkage

3.2 m (10 ft. 6 in.) HD 1957 kg (4,315 lb.)

4.0 m (13 ft. 1 in.) 1898 kg (4,184 lb.)

Boom-Lift Cylinders (2), Total Weight 624 kg (1,376 lb.)

1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.) 1160 kg (2,557 lb.)

HD Bucket

Counterweight, Standard 7629 kg (16,819 lb.)

Operating Dimensions

Arm Length 3.2 m (10 ft. 6 in.) HD 4.0 m (13 ft. 1 in.)

Arm Digging Force

SAE 177.6 kN (39,930 lb.) 152.6 kN (34,314 lb.)

ISO 185.0 kN (41,590 lb.) 159.0 kN (35,745 lb.)

Bucket Digging Force

SAE 225.2 kN (50,628 lb.) 225.2 kN (50,628 lb.)

ISO 246.0 kN (55,303 lb.) 246.0 kN (55,303 lb.)

A Maximum Reach 11.10 m (36 ft. 5 in.) 11.86 m (38 ft. 11 in.)

A' Maximum Reach at Ground Level 10.89 m (35 ft. 9 in.) 11.67 m (38 ft. 3 in.)

B Maximum Digging Depth 7.38 m (24 ft. 3 in.) 8.18 m (26 ft. 10 in.)


B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom 7.21 m (23 ft. 8 in.) 8.04 m (26 ft. 5 in.)

C Maximum Cutting Height 10.36 m (34 ft. 0 in.) 10.75 m (35 ft. 3 in.)


D Maximum Dumping Height 7.24 m (23 ft. 9 in.) 7.63 m (25 ft. 0 in.)

E Minimum Swing Radius 4.46 m (14 ft. 8 in.) 4.47 m (14 ft. 8 in.)

F Maximum Vertical Wall 6.42 m (21 ft. 1 in.) 7.27 m (23 ft. 10 in.)

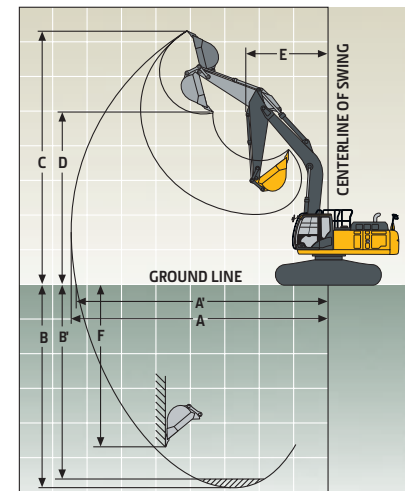

Machine Dimensions		380G LC	
Arm Length	3.2 (10 ft. 6 in.) HD	4.0 m (13 ft. 1 in.)	
A Overall Length	11.20 m (36 ft. 9 in.)	11.29 m (37 ft. 1 in.)	
B Overall Height	3.27 m (10 ft. 9 in.)	3.60 m (11 ft. 10 in.)	
C Rear-End Length/Swing Radius	3.60 m (11 ft. 10 in.)		
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)		
E Undercarriage Length	4.94 m (16 ft. 2 in.)		
F Counterweight Clearance	1.18 m (3 ft. 10 in.)		
G Upperstructure Width	2.99 m (9 ft. 10 in.)		
H Cab Height	3.17 m (10 ft. 5 in.)		
I Track Width	700 mm (28 in.) HD / 800 mm (32 in.) HD		
J Gauge Width	2.59 m (8 ft. 6 in.)		
K Ground Clearance	0.50 m (20 in.)		
L Overall Width with Shoes			
700 mm (28 in.) HD	3.29 m (10 ft. 10 in.)		
800 mm (32 in.) HD	3.39 m (11 ft. 2 in.)		

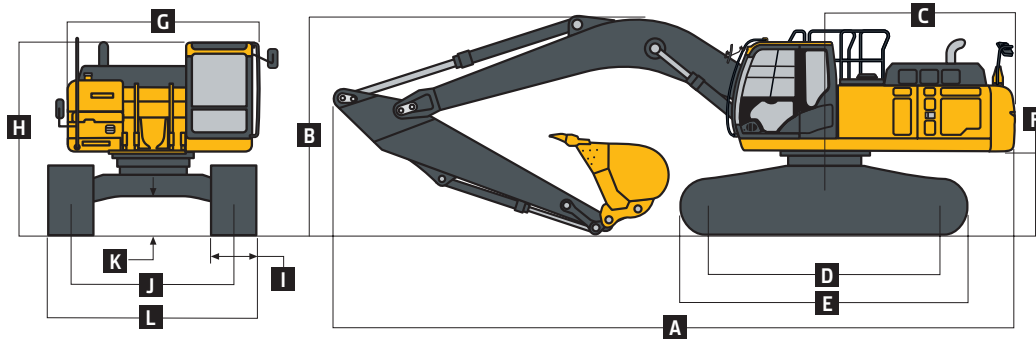

Lift Capacities

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 1270-kg (2,800 lb.) bucket and 800-mm (32 in.) HD shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.2-m (10 ft. 6 in.) HD arm</i>												
6.0 m (20 ft.)									7806	6710		
									(17,082)	(14,371)		
4.5 m (15 ft.)							9878	9578	8475	6515	6368	4579
							(21,357)	(20,618)	(18,430)	(13,985)		
3.0 m (10 ft.)					16 096	14 063	11 549	8981	9351	6241	7495	4479
					(34,555)	(30,342)	(24,944)	(19,352)	(20,278)	(13,410)	(16,066)	(9,578)
1.5 m (5 ft.)					18 594	13 091	12 991	8462	9974	5961	7360	4356
					(40,102)	(28,200)	(28,079)	(18,225)	(21,440)	(12,817)	(15,795)	(9,329)
Ground Line					19 348	12 683	13 792	8133	9747	5757	7262	4266
					(41,891)	(27,271)	(29,848)	(17,503)	(20,953)	(12,380)	(15,602)	(9,152)
-1.5 m (-5 ft.)			11 896	11 896			8003	9650	5670			
			(27,023)	(27,023)			(17,218)	(20,751)	(12,198)			
-3.0 m (-10 ft.)	14 227	14 227	19 619	19 619	17 190	12 755	12 828	8053	9604	5735		
	(31,928)	(31,928)	(44,624)	(44,624)	(37,195)	(27,413)	(27,670)	(17,335)	(20,489)	(12,369)		
-4.5 m (-15 ft.)			18 938	18 938	14 064	13 113	10 310	8318				
			(40,693)	(40,693)	(30,129)	(28,219)	(21,788)	(17,958)				
<i>With 4.0-m (13 ft. 1 in.) arm</i>												
7.5 m (25 ft.)									(14,562)	(14,562)		
6.0 m (20 ft.)									6939	6939	5716	4868
									(15,179)	(14,954)	(11,000)	(10,368)
4.5 m (15 ft.)									7721	6752	7114	4789
									(16,795)	(14,497)	(15,557)	(10,238)
3.0 m (10 ft.)					14 260	14 260	10 586	9333	8725	6451	7629	4642
					(30,632)	(30,632)	(22,873)	(20,101)	(18,928)	(13,862)	(16,451)	(9,938)
1.5 m (5 ft.)					17 458	13 633	12 311	8747	9704	6133	7490	4478
					(37,630)	(29,362)	(26,612)	(18,836)	(21,034)	(13,184)	(16,079)	(9,597)
Ground Line			6730	6730	19 133	12 967	13 503	8322	9874	5875	7341	4342
			(15,403)	(15,403)	(41,379)	(27,888)	(29,220)	(17,910)	(21,222)	(12,630)	(15,767)	(9,311)
-1.5 m (-5 ft.)	6799	6799	10 863	10 863	19 370	12 713	13 946	8095	9704	5722	7261	4268
	(15,210)	(15,210)	(24,660)	(24,660)	(41,953)	(27,321)	(29,966)	(17,412)	(20,858)	(12,303)	(15,610)	(9,166)
-3.0 m (-10 ft.)	11 387	11 387	16 293	16 293	18 425	12 723	13 529	8047	9672	5694		
	(25,561)	(25,561)	(36,911)	(36,911)	(39,871)	(27,341)	(29,232)	(17,314)	(20,804)	(12,255)		
-4.5 m (-15 ft.)	16 888	16 888	22 921	22 921	16 178	12 944	11 969	8177	8663	5840		
	(37,963)	(37,963)	(49,377)	(49,377)	(34,814)	(27,840)	(25,643)	(17,618)	(18,124)	(12,627)		
-6.0 m (-20 ft.)			16 336	16 336	11 807	11 807	7965	7965				
			(34,418)	(34,418)	(24,741)	(24,741)						


Buckets

380G LC

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere Fanggs™ teeth or ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force 3.2 m (10 ft. 6 in.) HD		Arm Dig Force 4.0 m (13 ft. 1 in.)		Bucket Tip Radius		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.	
Heavy Duty Plate Lip	914	36	1.13	1.5	971	2,140	225.2	496	177.6	392	152.6	337	1600	63.0	4
	1067	42	1.34	1.7	1003	2,212	225.2	496	177.6	392	152.6	337	1600	63.0	5
	1219	48	1.55	2.0	1055	2,326	225.2	496	177.6	392	152.6	337	1600	63.0	6
	1372	54	1.76	2.3	1161	2,559	225.2	496	177.6	392	152.6	337	1600	63.0	6
Heavy Duty High Capacity	760	30	0.96	1.3	1142	2,518	204.2	450	171.7	379	148.3	327	1765	69.5	4
	914	36	1.19	1.6	1263	2,783	204.2	450	171.7	379	148.3	327	1765	69.5	4
	1067	42	1.41	1.8	1416	3,123	204.2	450	171.7	379	148.3	327	1765	69.5	5
	1219	48	1.64	2.1	1506	3,321	204.2	450	171.7	379	148.3	327	1765	69.5	6
	1372	54	1.87	2.4	1617	3,565	204.2	450	171.7	379	148.3	327	1765	69.5	6

Bucket Selection Guide*

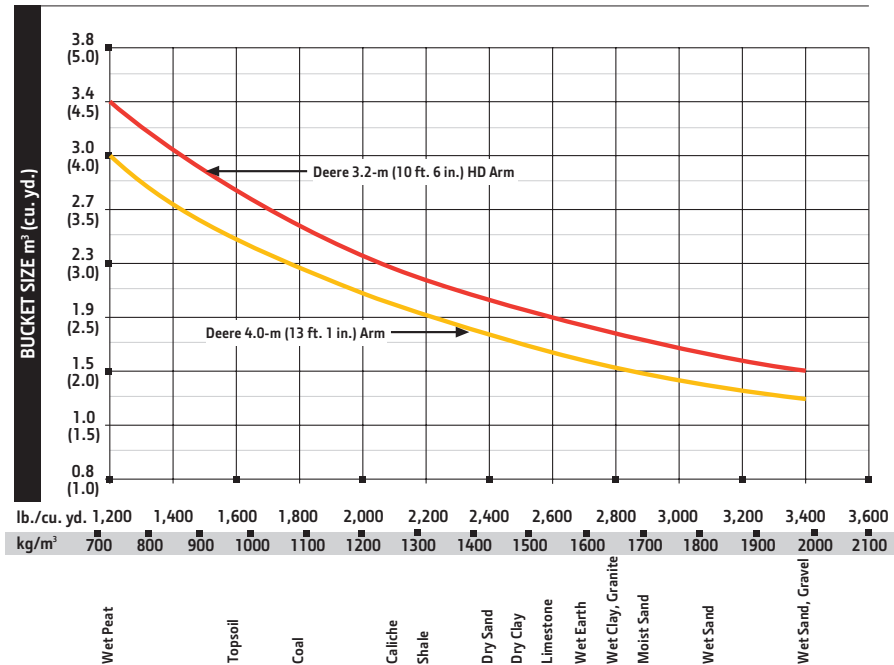

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

350G 380G Engine

● ●	Auto-idle system
● ●	Automatic belt-tension device
● ●	Batteries (2 – 12 volt)
● ●	Coolant recovery tank
● ●	Dual-element dry-type air filter
● ●	Electronic engine control
● ●	Enclosed fan guard (conforms to SAE J1308)
● ●	Engine coolant to –37 deg. C (–34 deg. F)
● ●	Programmable auto shutdown
● ●	Fuel filter with water separator
● ●	Full-flow oil filter
● ●	Turbocharger with charge air cooler
● ●	Cool-on-demand hydraulic-driven fan
● ●	500-hour engine-oil-change interval
● ●	70% (35 deg.) off-level capability
● ●	Engine-oil-sampling valve
▲ ▲	Chrome exhaust stack
▲ ▲	Electric ether starting aid
▲ ▲	Hydraulic fan reverser
▲ ▲	Engine coolant heater
▲ ▲	Severe-duty fuel filter

Hydraulic System

● ●	Reduced-drift valve for boom down, arm in
● ●	Auxiliary hydraulic valve section
● ●	Spring-applied, hydraulically released automatic swing brake
● ●	Auxiliary hydraulic-flow adjustments through monitor
● ●	Auto power lift
● ●	5,000-hour hydraulic-oil-change interval
● ●	Hydraulic-oil-sampling valve
▲ ▲	Auxiliary hydraulic lines
▲ ▲	Auxiliary pilot and electric controls
▲ ▲	Hydraulic filter restriction indicator kit
▲ ▲	Load-lowering control / Anti-drift device
▲ ▲	Single-pedal propel control
▲ ▲	Control pattern change valve

Undercarriage

● ●	Planetary drive with axial piston motors
● ●	Propel motor shields
● ●	Spring-applied, hydraulically released automatic propel brake
● ●	Track guides, front idler and 3 additional
● ●	2-speed propel with automatic shift
● ●	Upper carrier rollers (2)
● ●	Sealed and lubricated track chain
● ●	Triple semi-grouser shoes, 600 mm (24 in.)
● ●	Triple semi-grouser shoes, 700 mm (28 in.)

350G 380G Undercarriage (continued)

● ●	Single-bar shoes, 700 mm (28 in.) Heavy Duty (HD)
● ●	Triple semi-grouser shoes, 800 mm (32 in.)
● ●	Triple semi-grouser shoes, 800 mm (32 in.) HD
▲ ▲	Undercarriage frame opening guard

Upperstructure

● ●	Right-hand, left-hand, and counterweight mirrors
● ●	Vandal locks with ignition key: Cab door / Service doors / Toolbox
● ●	Debris screen in side panel
● ●	Remote-mounted engine oil and fuel filters
▲ ▲	“D” channel guard

Front Attachments

● ●	Centralized lubrication system
● ●	Dirt seals on all bucket pins
● ●	Less boom and arm
● ●	Oil-impregnated bushings
● ●	Reinforced resin thrust plates
● ●	Tungsten carbide thermal coating on arm-to-bucket joint
▲	Arm, 2.67 m (8 ft. 9 in.)
▲	Arm, 3.2 m (10 ft. 6 in.)
▲	Arm, 3.2 m (10 ft. 6 in.) HD
▲ ▲	Arm, 4.0 m (13 ft. 1 in.)
▲ ▲	Attachment quick-couplers
▲ ▲	Boom cylinder with plumbing to main-frame for less boom and arm
▲ ▲	Buckets: Heavy duty / Heavy-duty high capacity / Side cutters and teeth
▲ ▲	Material clamps
▲ ▲	Super-long fronts

Operator's Station

● ●	Adjustable independent-control positions (levers-to-seat, seat-to-pedals)
● ●	AM/FM radio
● ●	Auto climate control/air conditioner/heater/pressurizer
● ●	Built-in Operator's Manual storage compartment and manual
● ●	Cell-phone power outlet, 12 volt, 60 watt, 5 amp
● ●	Coat hook
● ●	Deluxe suspension cloth seat with 100-mm (4 in.) adjustable armrests
● ●	Floor mat
● ●	Front windshield wiper with intermittent speeds
● ●	Gauges (illuminated): Diesel Exhaust Fluid (DEF) / Engine coolant / Fuel
● ●	Horn, electric
● ●	Hourmeter, electric

350G 380G Operator's Station (continued)

● ●	Hydraulic shutoff lever, all controls
● ●	Hydraulic warm-up control
● ●	Interior light
● ●	Large cup holder
● ●	Machine Information Center (MIC)
● ●	Mode selectors (illuminated): Power modes – 3 / Travel modes – 2 with automatic shift / Work mode – one
● ●	Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, low DEF indication with audible alarm, fault code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator
● ●	Motion alarm with cancel switch (conforms to SAE J994)
● ●	Power-boost switch on right console lever
● ●	Auxiliary hydraulic control switches in right console lever
● ●	SAE 2-lever control pattern
● ●	Seat belt, 51 mm (2 in.), retractable
● ●	Tinted glass
● ●	Transparent tinted overhead hatch
● ●	Hot/cold beverage compartment
▲ ▲	Air-suspension heated seat
▲ ▲	Hydraulic oil filter restriction indicator light
▲ ▲	Protection screens for cab front, rear, and side
▲ ▲	Seat belt, 76 mm (3 in.), non-retractable
▲ ▲	Window vandal-protection covers

Electrical

● ●	100-amp alternator
● ●	Blade-type multi-fused circuits
● ●	Positive-terminal battery covers
● ●	JDLINK™ wireless communication system (available in specific countries; see your dealer for details)
▲ ▲	Rearview camera
▲ ▲	Cab extension wiring harness
● ●	Work lights: Halogen / One mounted on boom / One mounted on frame
▲ ▲	2 lights mounted on cab / One mounted on right side of boom / One mounted under engine hood

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with 1370-mm (54 in.) buckets, full fuel tanks, and 79-kg (175 lb.) operators; a 350G LC unit with 6928-kg (15,274 lb.) counterweight and 800-mm (32 in.) triple semi-grouser shoes; and a 380G LC unit with 7629-kg (16,819 lb.) counterweight and 800-mm (32 in.) heavy-duty triple semi-grouser shoes.



Put more work within reach.

Whether you're loading trucks, digging trenches, demolishing structures, or placing pipe, you'll get more done with our G-Series Excavators. Their rugged EPA Interim Tier 4 (IT4)/EU Stage IIIIB PowerTech™ diesel engines meet rigid emission regulations, enabling you to work, everywhere there's work, even in nonattainment areas. Customer-inspired refinements include a more comfortable, spacious cab. And an enhanced LCD monitor with simplified navigation that lets an operator easily dial-in a wealth of machine information and functionality. Exceptional power, smoothness, and ease of operation — the 350G LC and 380G LC deliver all you've come to expect in a John Deere excavator. And then some.

	350G LC	380G LC
Net rated power	202 kW (271 hp)	202 kW (271 hp)
Operating weight	34 726 kg (76,557 lb.)	37 200 kg (82,012 lb.)
Lifting capacity	12 851 kg (28,331 lb.)	13 254 kg (29,220 lb.)
Maximum digging depth	8.18 m (26 ft. 10 in.)	8.18 m (26 ft. 10 in.)
Arm digging force	152.6–159.0 kN (34,314–35,745 lb.)	152.6–159.0 kN (34,314–35,745 lb.)
Bucket digging force	225.2–246.0 kN (50,628–55,303 lb.)	225.2–246.0 kN (50,628–55,303 lb.)

With John Deere WorkSight™, JDLink™ monitoring provides real-time machine utilization and health data, plus location information. FleetCare proactively suggests maintenance to correct problems early before they turn into costly downtime. And Service ADVISOR™ Remote enables your dealer to read diagnostic codes, record performance data, and even update software without a trip to the jobsite. It's the most comprehensive, easy-to-use suite of technology available for increasing uptime and productivity while lowering operating costs. And it's only available from John Deere.



The IT4/Stage IIIB technology utilized in our PowerTech diesel engines is simple, fuel efficient, fully integrated, and fully supported.


With unsurpassed visibility, a large entryway, generous legroom, and a supportive high-back seat, the G-Series' spacious cab delivers day-long convenience and comfort.

Highly efficient hydraulically driven fan runs only as needed, reducing noise, fuel consumption, and operating costs. Reversing option automatically back-blows cooler cores to keep them clean.

Extended engine and hydraulic oil-service intervals increase uptime and reduce daily operating costs.

Need extra stability or lift capacity? Opt for the 380G LC. Its standard heavy-duty boom, 3.2-m (10 ft. 6 in.) arm, and undercarriage provide the stamina and strength to handle demanding tasks in pipeline, demolition, and scrap-handling tasks.

Choose from a variety of track widths, arm lengths, buckets, high-flow auxiliary hydraulic packages, and numerous other options.



Work harder. And smarter.

Who says you have to choose between working harder and working smarter? With our enhanced engine/hydraulic management system commanding more hydraulic muscle, these excavators do both — putting that extra ability to work with typically smooth operation and finesse. Add to these other John Deere advantages such as three power modes, power boost, and JDLink, and this excavator provides everything you need to give productivity an extra push. Combining brawn and brains, our G-Series Excavators are a wise choice.






Powerwise III perfectly balances engine performance and hydraulic flow for predictable operation. Three productivity modes allow you to choose the digging style that fits the job. **High-productivity** delivers more power and faster hydraulic response to move more material. **Power** delivers a balance of power, speed, and fuel economy for normal operation. **Economy** limits top speed and helps save fuel.

1. Low-effort joysticks, unmatched metering, and smooth multifunction operation deliver the control and finesse you need for utilities work.

2. Generous flow, arm force, and swing torque help speed cycles. So you can do your best to stay on schedule or ahead of the weather.

3. When the task calls for a little extra, simply press the power-boost button on the right-hand control and muscle through.

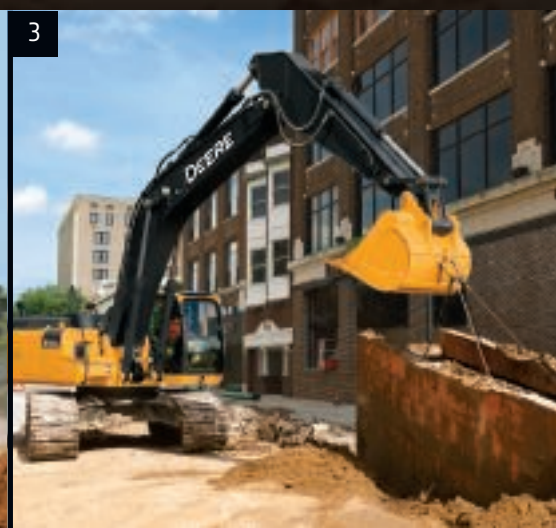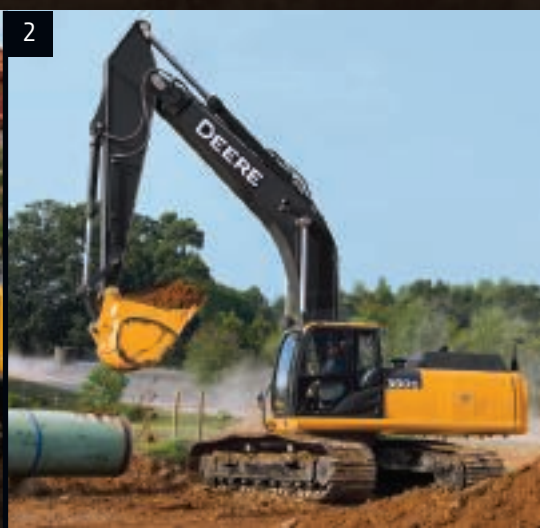

The image shows the interior of a tractor cab. A person's hand is visible on the left, holding a silver travel mug. The central console features a large joystick with a red lever. The dashboard is yellow and has several warning labels attached to it, including 'DANGER', 'WARNING', and 'IMPORTANT'. The seat is upholstered in a light-colored fabric. The overall lighting is bright, highlighting the various controls and components of the cab.

Operating ease takes a turn for the better.

Now it's easier than ever for your operators to "dial things up." The G-Series' refined monitor employs a rotary control that makes it quick and easy to tap into an abundance of performance and convenience functions and features. Operators will also appreciate the comfortable fabric-covered high-back seat and increased legroom in the spacious, well-appointed cab. As always, unsurpassed all-round visibility, low-effort joysticks, a highly efficient HVAC system, and numerous other amenities provide everything needed to do your best work.



With large self-cleaning steps and wide entryways, getting to and from “the office” has never been easier.

Spacious cab is comfortable and noticeably quiet. Silicone-filled mounts effectively isolate operators from noise and vibration.

We've got your back with a sculpted mechanical-suspension high-back seat. Seat has 267 mm (10½ in.) of travel, sliding together or independent of the joystick console. So it won't cramp an operator's style. For even more support and comfort, opt for the air-suspension heated seat.

Ergonomically correct short-throw pilot levers provide smooth, predictable fingertip control with less movement or effort. Push buttons in the right lever allow fingertip control of auxiliary hydraulic flow for operating attachments.

No shortage of storage in here. There's a place for a cooler, cup holders, and even a hot/cold box that keeps beverages at just the right temperature.

Optional cab and right-side boom lights provide extra illumination to extend your workday beyond daylight hours.

1. Multi-language LCD monitor and rotary dial provide intuitive access to a wealth of information and functions. Just turn and tap to select work mode, access operating info, check maintenance intervals, source diagnostic codes, adjust cab temperature, and tune the radio. Plus much more.
2. Wide expanse of front and side glass, narrow front cab posts, large overhead glass, and numerous mirrors provide virtually unobstructed all-around visibility. If you need to see more, choose the optional camera that displays the action behind on the monitor.
3. Automatic, high-velocity bi-level climate-control system with automotive-style adjustable louvers helps keep the glass clear and the cab comfortable.



1



2



3

Nothing runs like a Deere, because nothing is built like one.

When you've got places to go, people to see, and schedules to keep, you need dependable workers like these. Built to deliver unsurpassed uptime, these go-getters employ many of the same job-proven digging structures and hydraulic, electrical, and undercarriage components as their highly regarded predecessors. You'll also continue to profit from durability-enhancing "extras" such as tungsten-carbide-coated wear surfaces, welded-boom bulkheads, wet-sleeve engine liners, and extended service intervals. When you know how they're built, you'll run a Deere.

Graphite-iron wet-sleeve cylinder liners, mono-steel pistons, and large-diameter connecting rods ensure long-term engine durability.

Tungsten-carbide coating creates an extremely wear-resistant surface to protect the all-important bucket-to-arm joint.


Oil-impregnated bushings enhance durability and extend grease intervals to 500 hours for the arm-and-boom joint and 100 hours for the bucket joint.

1. Thick-plate single-sheet mainframe, box-section track frames, and industry-exclusive double-seal swing bearing deliver rock-solid durability.

2. With large idlers, rollers, and strutted links, the sealed and lubricated undercarriage delivers long and reliable performance.

3. Highly efficient, heavy-duty cooling system keeps things cool, even in tough environments or high altitudes.

4. Reinforced D-channel side frames provide maximum cab and component protection.

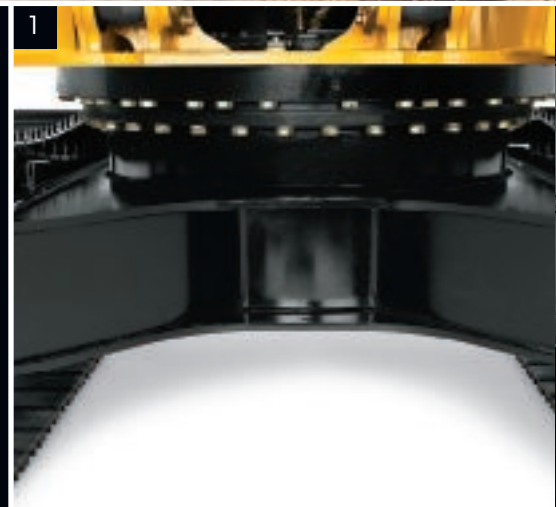




Our EPA IT4/EU Stage IIIB technology is simple, fuel efficient, fully integrated, and fully supported. It employs field-proven cooled exhaust gas recirculation (EGR) for reducing NO_x, and a diesel particulate filter (DPF) and diesel oxidation catalyst (DOC) to reduce particulate matter.

A John Deere exclusive, three welded bulkheads within the boom resist torsional stress for unsurpassed durability.

Reinforced resin thrust plates, grooved bushings, and thermal-coated bucket joints increase arm and boom lube intervals to 500 hours.

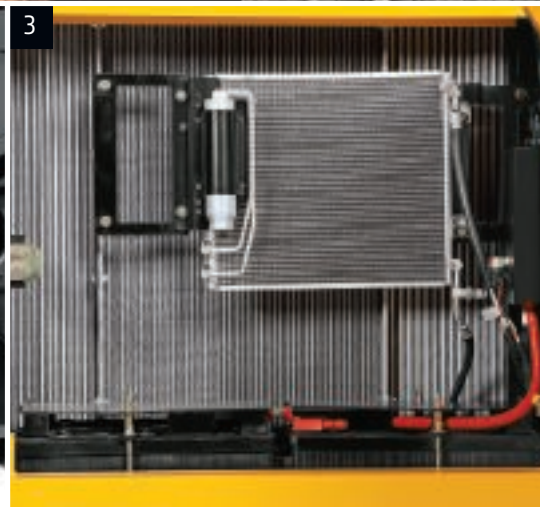

2

3

4

Seeking simplified maintenance? You'll be a big fan of the G-Series.

Swing open the side panels and you'll discover many of the numerous ways this excavator can minimize maintenance, increase uptime, and reduce daily operating costs. Take the heavy-duty cooling system, for example. Its hydraulically driven fan runs only as fast or often as needed, reducing fuel consumption and wear-causing debris flow through the cooler cores. As always, grouped service points make quick work of the daily routine. Easy-to-check sight gauges and fluid reservoirs. Quick-change remote-mounted filters. Convenient fluid-sample ports and advanced self-diagnostics — with time- and money-saving advantages such as these, there's more to like.

Perforations in the hood and side shields serve as a "first filter," helping prevent trash entry. Anything that passes through will also clear the cooler cores.

Optional reversing fan back-blows cooler cores to reduce debris buildup. It's a welcome addition that helps increase uptime.

Auto-idle automatically reduces engine speed when hydraulics aren't in use. Auto-shutdown further preserves precious fuel.

EPA IT4/EU Stage IIIB diesel particulate filter is easily removed through the top of the engine compartment. Minimum service interval is 4,500 hours, and can be done by your John Deere dealer.



Engine Oil Filter

Previous Maintenance

2012/11/05 0.0h

Remains 498.8h

Maintenance Interval 500.0h





Large fuel tanks and 500- and 5,000-hour engine and hydraulic oil-service intervals decrease downtime for routine maintenance.

Fluid-level sight gauges are conveniently located and can be checked at a glance.

Convenient color-coded lubrication and maintenance chart helps ensure that nothing gets overlooked.

1. Easy-to-navigate LCD monitor issues scheduled maintenance alerts. Should a problem arise, it provides diagnostic information to help decrease downtime.
2. Fluid-sample and remote diagnostic ports help speed preventative maintenance and troubleshooting.
3. Vertical spin-on engine oil and fuel filters are conveniently located in the right rear compartment for easy ground-level servicing.
4. Ground-level fresh-air cab filter is quickly serviced from outside the cab. Where it's more likely to get done.
5. Centralized lube banks place difficult-to-lube zerks within easy reach. They make greasing less messy and time consuming, too.
6. Cooler cores' 10-fin-per-inch spacing lets trash easily pass to resist plugging. Hinged, swing-out coolers provide added core access.



4



5



6

350G LC



Engine	350G LC		
	Base engine for use in U.S., U.S. Territories, and Canada	Optional engine for use outside the U.S. and U.S. Territories	Optional engine for use outside the U.S., U.S. Territories, and Canada
Manufacturer and Model	John Deere PowerTech™ PSX 9.0 L	John Deere PowerTech™ Plus 9.0 L	John Deere PowerTech™ 9.0 L
Non-Road Emissions Standard	EPA Interim Tier 4/EU Stage IIIB	EPA Tier 3/EU Stage IIIA	EPA Tier 2/EU Stage II
Net Rated Power (ISO 9249)	202 kW (271 hp) at 1,900 rpm	202 kW (271 hp) at 1,900 rpm	202 kW (271 hp) at 1,900 rpm
Cylinders	6	6	6
Displacement	9.0 L (549 cu. in.)	9.0 L (549 cu. in.)	9.0 L (549 cu. in.)
Off-Level Capacity	70% (35 deg.)	70% (35 deg.)	70% (35 deg.)
Aspiration	Turbocharged, air-to-air charge-air cooler	Turbocharged, air-to-air charge-air cooler	Turbocharged, air-to-air charge-air cooler
Cooling			
Cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive			
Powertrain			
2-speed propel with automatic shift			
Maximum Travel Speed			
Low	3.2 km/h (2.0 mph)		
High	5.0 km/h (3.1 mph)		
Drawbar Pull	29 200 kg (64,375 lb.)		
Hydraulics			
Open center, load sensing			
Main Pumps	2 variable-displacement pumps		
Maximum Rated Flow	288 L/m (76.1 gpm) x 2		
Pilot Pump	One gear		
Maximum Rated Flow	34 L/m (8.9 gpm)		
Pressure Setting	3900 kPa (566 psi)		
System Operating Pressure			
Circuits			
Implement	34 300 kPa (4,975 psi)		
Travel	35 500 kPa (5,149 psi)		
Swing	33 300 kPa (4,830 psi)		
Power Boost	38 000 kPa (5,511 psi)		
Controls	Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever		
Cylinders			
	<i>Bore</i>	<i>Rod Diameter</i>	<i>Stroke</i>
Boom (2)	145 mm (5.7 in.)	100 mm (3.9 in.)	1520 mm (59.8 in.)
Arm (1)	170 mm (6.7 in.)	115 mm (4.5 in.)	1740 mm (68.5 in.)
Bucket (1)	140 mm (5.5 in.)	95 mm (3.7 in.)	1250 mm (49.2 in.)
Electrical			
Number of Batteries (12 volt)	2		
Battery Capacity	1,400 CCA		
Alternator Rating	100 amp		
Work Lights	2 halogen (one mounted on boom, one on frame)		
Undercarriage			
Rollers (each side)			
Carrier	2		
Track	8		
Shoes, Triple Semi-Grousers (each side)	48		
Track			
Adjustment	Hydraulic		
Guides	3 per side		
Chain	Sealed and lubricated		



Ground Pressure	350G LC
800-mm (32 in.) Triple Semi-Grouser Shoes	52.8 kPa (7.66 psi)

Swing Mechanism	
Speed	10.7 rpm
Torque	120 000 Nm (88,507 lb.-ft.)

Serviceability	
Refill Capacities	


Fuel Tank	628 L (166 gal.)
Cooling System	39.7 L (10.5 gal.)
Engine Oil with Filter	27 L (7.2 gal.)
Hydraulic Tank	193 L (51 gal.)
Hydraulic System	290 L (77 gal.)
Swing Drive	11.8 L (12.5 qt.)
Gearbox	
Propel (each)	8.5 L (9.0 qt.)
Pump Drive	1.1 L (1.2 qt.)

Operating Weights	
With full fuel tank; 79-kg (175 lb.) operator; 1.76-m ³ (2.3 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 6928-kg (15,274 lb.) counterweight; and 800-mm (32 in.) triple semi-grouser shoes	
Operating Weight	34 726 kg (76,557 lb.)

Component Weights	
Undercarriage with 800-mm (32 in.) Triple Semi-Grouser Shoes	12 710 kg (28,020 lb.)
One-Piece Boom (with arm cylinder)	3031 kg (6,682 lb.)
Arm with Bucket Cylinder and Linkage	
2.66 m (8 ft. 9 in.)	1649 kg (3,635 lb.)
3.2 m (10 ft. 6 in.)	1758 kg (3,876 lb.)
4.0 m (13 ft. 1 in.)	1898 kg (4,184 lb.)
Boom-Lift Cylinders (2), Total Weight	624 kg (1,376 lb.)
1.76-m ³ (2.3 cu. yd.), 1370-mm (54 in.) Heavy-Duty Bucket	1160 kg (2,557 lb.)
Counterweight, Standard	6928 kg (15,274 lb.)


Operating Dimensions			
Arm Length	2.66 m (8 ft. 9 in.)	3.2 m (10 ft. 6 in.)	4.0 m (13 ft. 1 in.)

Arm Digging Force			
SAE	204.2 kN (45,914 lb.)	177.6 kN (39,930 lb.)	152.6 kN (34,314 lb.)
ISO	222.0 kN (49,908 lb.)	185.0 kN (41,590 lb.)	159.0 kN (35,745 lb.)
Bucket Digging Force			
SAE	225.2 kN (50,628 lb.)	225.2 kN (50,628 lb.)	225.2 kN (50,628 lb.)
ISO	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)
Lifting Capacity Over Front at Ground Level 6.1-m (20 ft.) Reach (with power boost)	12 790 kg (28,197 lb.)	12 800 kg (28,219 lb.)	12 851 kg (28,331 lb.)
A Maximum Reach	10.57 m (34 ft. 8 in.)	11.10 m (36 ft. 5 in.)	11.86 m (38 ft. 11 in.)
A' Maximum Reach at Ground Level	10.36 m (34 ft. 0 in.)	10.89 m (35 ft. 9 in.)	11.67 m (38 ft. 3 in.)
B Maximum Digging Depth	6.84 m (22 ft. 5 in.)	7.38 m (24 ft. 3 in.)	8.18 m (26 ft. 10 in.)
B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom	6.64 m (21 ft. 9 in.)	7.21 m (23 ft. 8 in.)	8.04 m (26 ft. 5 in.)
C Maximum Cutting Height	9.99 m (32 ft. 9 in.)	10.36 m (34 ft. 0 in.)	10.75 m (35 ft. 3 in.)
D Maximum Dumping Height	6.94 m (22 ft. 9 in.)	7.24 m (23 ft. 9 in.)	7.63 m (25 ft. 0 in.)
E Minimum Swing Radius	4.61 m (15 ft. 1 in.)	4.46 m (14 ft. 8 in.)	4.47 m (14 ft. 8 in.)
F Maximum Vertical Wall	5.51 m (18 ft. 1 in.)	6.42 m (21 ft. 1 in.)	7.27 m (23 ft. 10 in.)
G Tail-Swing Radius	3.60 m (11 ft. 10 in.)	3.60 m (11 ft. 10 in.)	3.60 m (11 ft. 10 in.)

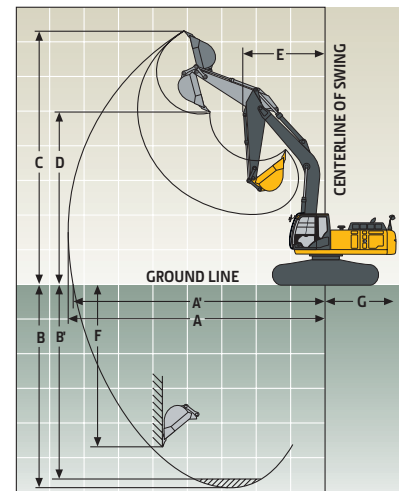

Machine Dimensions 350G LC

A Overall Length		
2.66 m (8 ft. 9 in.)	11.33 m (37 ft. 2 in.)	
3.2 m (10 ft. 6 in.)	11.20 m (36 ft. 9 in.)	
4.0 m (13 ft. 1 in.)	11.29 m (37 ft. 1 in.)	
B Overall Height		
2.66 m (8 ft. 9 in.)	3.47 m (11 ft. 5 in.)	
3.2 m (10 ft. 6 in.)	3.27 m (10 ft. 9 in.)	
4.0 m (13 ft. 1 in.)	3.60 m (11 ft. 10 in.)	
C Rear-End Length/Swing Radius	3.60 m (11 ft. 10 in.)	
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)	
E Undercarriage Length	4.94 m (16 ft. 2 in.)	
F Counterweight Clearance	1.18 m (3 ft. 10 in.)	
G Upperstructure Width	2.99 m (9 ft. 10 in.)	
H Cab Height	3.14 m (10 ft. 4 in.)	
I Track Width with Shoes	600 mm (24 in.) / 700 mm (28 in.) / 800 mm (32 in.)	
J Gauge Width	2.59 m (8 ft. 6 in.)	
K Ground Clearance	0.50 m (20 in.)	
L Overall Width with Shoes		
600 mm (24 in.)	3.19 m (10 ft. 6 in.)	
700 mm (28 in.)	3.29 m (10 ft. 10 in.)	
800 mm (32 in.)	3.39 m (11 ft. 2 in.)	

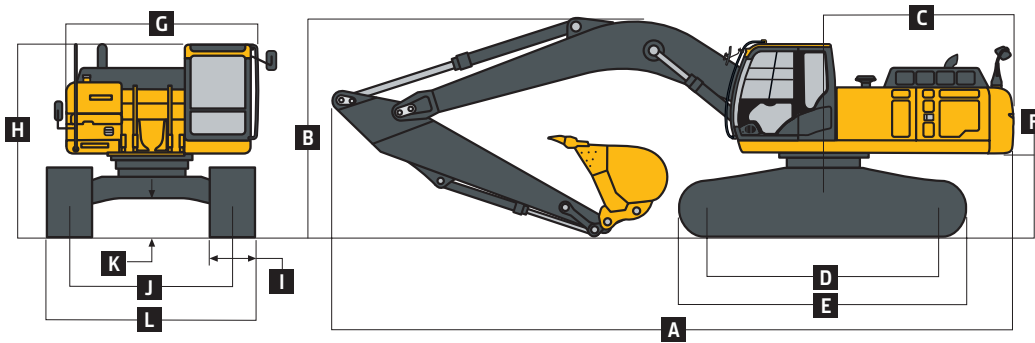

Lift Capacities

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 1170-kg (2,580 lb.) bucket and 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 2.66-m (8 ft. 9 in.) arm</i>												
6.0 m (20 ft.)							9496	9213	8705	6162		
							(20,636)	(19,803)	(19,093)	(13,179)		
4.5 m (15 ft.)			14 206	14 021	10 894	8801	9279	6021				
			(30,447)	(30,255)	(23,562)	(18,960)	(20,190)	(12,922)				
3.0 m (10 ft.)			17 742	12 827	12 506	8285	9573	5798				
			(38,067)	(27,693)	(27,011)	(17,857)	(20,571)	(12,462)				
1.5 m (5 ft.)					13 399	7868	9319	5570				
					(36,850)	(26,125)	(28,794)	(16,949)	(20,037)	(11,982)		
Ground Line					18 814	11 932	13 127	7634	9155	5423		
					(42,867)	(25,647)	(28,197)	(16,432)	(19,685)	(11,666)		
-1.5 m (-5 ft.)			12 495	12 495	18 754	11 959	13 059	7575	9117	5389		
			(28,545)	(28,545)	(40,705)	(25,693)	(28,045)	(16,301)	(19,617)	(11,605)		
-3.0 m (-10 ft.)			21 868	21 868	16 665	12 147	12 606	7679				
			(47,544)	(47,544)	(36,066)	(26,109)	(27,142)	(16,540)				
-4.5 m (-15 ft.)			16 500	16 500	12 776	12 551						
			(35,354)	(35,354)	(27,209)	(27,027)						
<i>With 3.2-m (10 ft. 6 in.) arm</i>												
6.0 m (20 ft.)								8008	6249			
								(17,528)	(13,381)			
4.5 m (15 ft.)							10 108	8940	8700	6077	6425	4268
							(21,858)	(19,242)	(18,923)	(13,042)		
3.0 m (10 ft.)					16 457	13 179	11 834	8402	9604	5832	7003	4180
					(35,331)	(28,428)	(25,561)	(18,102)	(20,664)	(12,529)	(15,009)	(8,936)
1.5 m (5 ft.)					19 033	12 300	13 321	7933	9338	5579	6882	4069
					(41,053)	(26,492)	(28,796)	(17,084)	(20,070)	(11,995)	(14,768)	(8,714)
Ground Line					19 818	11 930	13 140	7635	9132	5395	6794	3988
					(42,912)	(25,649)	(28,219)	(16,430)	(19,628)	(11,598)	(14,592)	(8,553)
-1.5 m (-5 ft.)			11 956	11 956	19 291	11 864	13 002	7516	9042	5314		
			(27,138)	(27,138)	(41,824)	(25,490)	(27,916)	(16,168)	(19,442)	(11,431)		
-3.0 m (-10 ft.)	14 280	14 280	19 673	19 673	17 649	11 988	13 051	7558	9105	5371		
	(32,048)	(32,048)	(44,674)	(44,674)	(38,194)	(25,762)	(28,032)	(16,269)	(19,608)	(11,580)		
-4.5 m (-15 ft.)			19 521	19 521	14 491	12 307	10 645	7794				
			(41,956)	(41,956)	(31,054)	(26,481)	(22,511)	(16,823)				

Lift Capacities (continued) 350G LC

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 1170-kg (2,580 lb.) bucket and 800-mm (32 in.) shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.


Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)		
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	
With 4.0-m (13 ft. 1 in.) arm													
7.5 m (25 ft.)										(14,716)	(13,856)		
6.0 m (20 ft.)										7015	6409	5727	4442
										(15,348)	(13,734)	(11,021)	(9,453)
4.5 m (15 ft.)										7813	6203	7212	4370
										(16,997)	(13,312)	(15,462)	(9,335)
3.0 m (10 ft.)					14 409	13 717	10 708	8612	8838	5923	7070	4234	
					(30,952)	(29,563)	(23,138)	(18,543)	(19,174)	(12,721)	(15,160)	(9,058)	
1.5 m (5 ft.)					17 673	12 624	12 469	8065	9401	5626	6904	4082	
					(38,094)	(27,185)	(26,955)	(17,362)	(20,198)	(12,090)	(14,815)	(8,741)	
Ground Line			6735	6735	19 386	12 004	13 195	7669	9133	5386	6766	3955	
			(15,416)	(15,416)	(41,927)	(25,812)	(28,331)	(16,500)	(19,623)	(11,573)	(14,526)	(8,476)	
-1.5 m (-5 ft.)	6807	6807	10 880	10 880	19 638	11 769	12 949	7458	8974	5244	6692	3887	
	(15,227)	(15,227)	(24,662)	(24,662)	(42,536)	(25,286)	(27,797)	(16,037)	(19,285)	(11,269)	(14,381)	(8,342)	
-3.0 m (-10 ft.)	11 398	11 398	16 291	16 291	18 694	11 779	12 899	7414	8945	5218			
	(25,572)	(25,572)	(36,941)	(36,941)	(40,455)	(25,307)	(27,693)	(15,947)	(19,236)	(11,226)			
-4.5 m (-15 ft.)	16 873	16 873	23 293	23 293	16 436	11 987	12 165	7536	8817	5356			
	(38,021)	(38,021)	(50,183)	(50,183)	(35,373)	(25,775)	(26,067)	(16,233)	(18,456)	(11,576)			
-6.0 m (-20 ft.)			16 669	16 669	12 038	12 038	8137	7927					
			(35,135)	(35,135)	(25,239)	(25,239)							

Buckets

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere Fanggs™ teeth or ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force		Arm Dig Force		Arm Dig Force		Bucket Tip Radius	Number of Teeth	
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	kN	lb.			mm
Heavy Duty Plate Lip	915	36	1.13	1.5	971	2,140	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	4
	1065	42	1.34	1.7	1003	2,212	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	5
	1220	48	1.55	2.0	1055	2,326	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	6
	1372	54	1.76	2.3	1161	2,559	225.2	496	204.2	450	177.6	392	152.6	337	1600	63.0	6
Heavy Duty High Capacity	760	30	0.96	1.3	1142	2,518	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	4
	915	36	1.19	1.6	1263	2,783	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	4
	1065	42	1.41	1.8	1416	3,123	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	5
	1220	48	1.64	2.1	1506	3,321	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	6
	1372	54	1.87	2.4	1617	3,565	204.2	450	196.6	433	171.7	379	148.3	327	1765	69.5	6

Bucket Selection Guide*

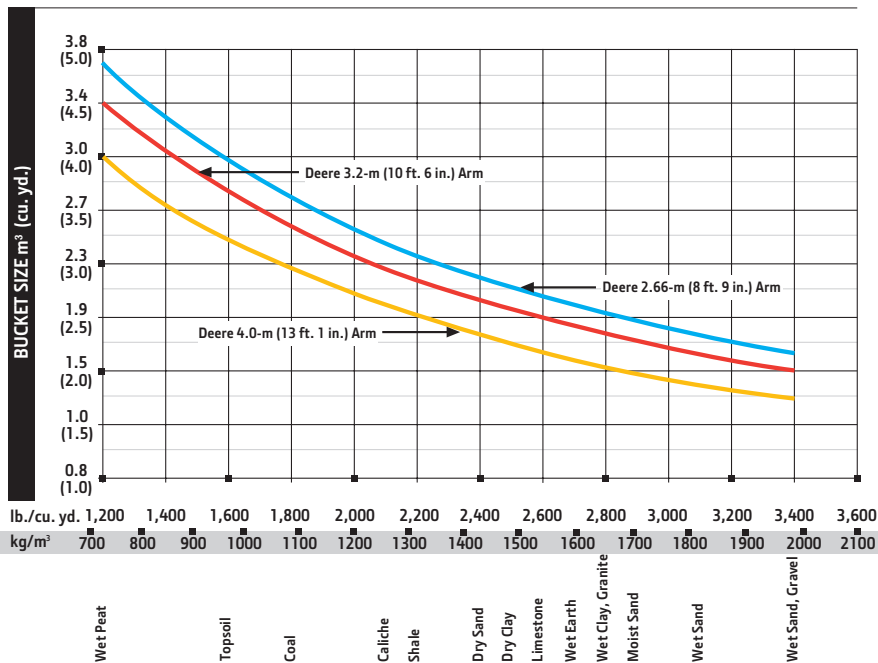

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

380G LC

Engine		380G LC	
		Base engine for use in U.S., U.S. Territories, and Canada	Optional engine for use outside the U.S. and U.S. Territories
Manufacturer and Model		John Deere PowerTech™ PSX 9.0 L	John Deere PowerTech™ Plus 9.0 L
Non-Road Emissions Standard		EPA Interim Tier 4/EU Stage IIIB	EPA Tier 3/EU Stage IIIA
Net Rated Power (ISO 9249)		202 kW (271 hp) at 1,900 rpm	202 kW (271 hp) at 1,900 rpm
Cylinders		6	6
Displacement		9.0 L (549 cu. in.)	9.0 L (549 cu. in.)
Off-Level Capacity		70% (35 deg.)	70% (35 deg.)
Aspiration		Turbocharged, air-to-air charge-air cooler	Turbocharged, air-to-air charge-air cooler
Cooling			
Cool-on-demand hydraulic-driven, suction-type fan with remote-mounted drive			
Powertrain			
2-speed propel with automatic shift			
Maximum Travel Speed			
Low		3.2 km/h (2.0 mph)	
High		5.0 km/h (3.1 mph)	
Drawbar Pull		29 200 kg (64,375 lb.)	
Hydraulics			
Open center, load sensing			
Main Pumps		2 variable-displacement pumps	
Maximum Rated Flow		288 L/m (76.1 gpm) x 2	
Pilot Pump		One gear	
Maximum Rated Flow		34 L/m (8.9 gpm)	
Pressure Setting		3900 kPa (566 psi)	
System Operating Pressure			
Circuits			
Implement		34 300 kPa (4,975 psi)	
Travel		35 500 kPa (5,149 psi)	
Swing		33 300 kPa (4,830 psi)	
Power Boost		38 000 kPa (5,511 psi)	
Controls		Pilot levers, short stroke, low-effort hydraulic pilot controls with shutoff lever	
Cylinders			
		<i>Bore</i>	<i>Rod Diameter</i>
Boom (2)		145 mm (5.7 in.)	100 mm (3.9 in.)
Arm (1)		170 mm (6.7 in.)	115 mm (4.5 in.)
Bucket (1)		140 mm (5.5 in.)	95 mm (3.7 in.)
			<i>Stroke</i>
Boom (2)			1520 mm (59.8 in.)
Arm (1)			1740 mm (68.5 in.)
Bucket (1)			1250 mm (49.2 in.)
Electrical			
Number of Batteries (12 volt)		2	
Battery Capacity		1,400 CCA	
Alternator Rating		100 amp	
Work Lights		2 halogen (one mounted on boom, one on frame)	
Undercarriage			
Rollers (each side)			
Carrier		2	
Track		8	
Shoes, Triple Semi-Grousers (each side)		48	
Track			
Adjustment		Hydraulic	
Guides		3 per side	
Chain		Sealed and lubricated	



Ground Pressure **380G LC**

800-mm (32 in.) Heavy-Duty Triple Semi-Grouser Shoes 56.5 kPa (8.20 psi)

Swing Mechanism

Speed 10.7 rpm
Torque 120 000 Nm (88,507 lb.-ft.)

Serviceability

Refill Capacities

Fuel Tank 628 L (166 gal.)
Cooling System 39.7 L (10.5 gal.)
Engine Oil with Filter 27 L (7.2 gal.)
Hydraulic Tank 193 L (51 gal.)
Hydraulic System 290 L (77 gal.)
Swing Drive 11.8 L (12.5 qt.)
Gearbox
Propel (each) 8.5 L (9.0 qt.)
Pump Drive 1.1 L (1.2 qt.)

Operating Weights

With full fuel tank; 79-kg (175 lb.) operator; 1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.), 1160-kg (2,557 lb.) bucket; 4.0-m (13 ft. 1 in.) arm; 7629-kg (16,819 lb.) counterweight; and 800-mm (32 in.) Heavy-Duty triple semi-grouser shoes


Operating Weight 37 200 kg (82,012 lb.)

Component Weights

Undercarriage, Heavy-Duty, with 800-mm (32 in.) Heavy-Duty Triple Semi-Grouser Shoes 13 550 kg (29,872 lb.)
Heavy-Duty One-Piece Boom (with arm cylinder) 3541 kg (7,806 lb.)
Arm with Bucket Cylinder and Linkage
3.2 m (10 ft. 6 in.) Heavy Duty 1957 kg (4,315 lb.)
4.0 m (13 ft. 1 in.) 1898 kg (4,184 lb.)
Boom-Lift Cylinders (2), Total Weight 624 kg (1,376 lb.)
1.76-m³ (2.3 cu. yd.), 1370-mm (54 in.) Heavy-Duty Bucket 1160 kg (2,557 lb.)
Counterweight, Standard 7629 kg (16,819 lb.)


Operating Dimensions

Arm Length	<i>3.2 m (10 ft. 6 in.) Heavy Duty</i>	<i>4.0 m (13 ft. 1 in.)</i>
Arm Digging Force		
SAE	177.6 kN (39,930 lb.)	152.6 kN (34,314 lb.)
ISO	185.0 kN (41,590 lb.)	159.0 kN (35,745 lb.)
Bucket Digging Force		
SAE	225.2 kN (50,628 lb.)	225.2 kN (50,628 lb.)
ISO	246.0 kN (55,303 lb.)	246.0 kN (55,303 lb.)
Lifting Capacity Over Front at Ground Level 6.1-m (20 ft.) Reach (with power boost)	13 539 kg (29,848 lb.)	13 254 kg (29,220 lb.)
A Maximum Reach	11.10 m (36 ft. 5 in.)	11.86 m (38 ft. 11 in.)
A' Maximum Reach at Ground Level	10.89 m (35 ft. 9 in.)	11.67 m (38 ft. 3 in.)
B Maximum Digging Depth	7.38 m (24 ft. 3 in.)	8.18 m (26 ft. 10 in.)
B' Maximum Digging Depth at 2.44-m (8 ft. 0 in.) Flat Bottom	7.21 m (23 ft. 8 in.)	8.04 m (26 ft. 5 in.)
C Maximum Cutting Height	10.36 m (34 ft. 0 in.)	10.75 m (35 ft. 3 in.)
D Maximum Dumping Height	7.24 m (23 ft. 9 in.)	7.63 m (25 ft. 0 in.)
E Minimum Swing Radius	4.46 m (14 ft. 8 in.)	4.47 m (14 ft. 8 in.)
F Maximum Vertical Wall	6.42 m (21 ft. 1 in.)	7.27 m (23 ft. 10 in.)
G Tail-Swing Radius	3.60 m (11 ft. 10 in.)	3.60 m (11 ft. 10 in.)

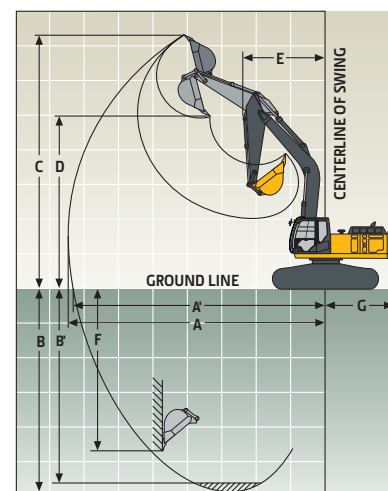

Machine Dimensions 380G LC

A Overall Length		
3.2 m (10 ft. 6 in.) Heavy Duty	11.20 m (36 ft. 9 in.)	
4.0 m (13 ft. 1 in.)	11.29 m (37 ft. 1 in.)	
B Overall Height		
3.2 m (10 ft. 6 in.) Heavy Duty	3.27 m (10 ft. 9 in.)	
4.0 m (13 ft. 1 in.)	3.60 m (11 ft. 10 in.)	
C Rear-End Length/Swing Radius	3.60 m (11 ft. 10 in.)	
D Distance Between Idler/Sprocket Centerline	4.05 m (13 ft. 3 in.)	
E Undercarriage Length	4.94 m (16 ft. 2 in.)	
F Counterweight Clearance	1.18 m (3 ft. 10 in.)	
G Upperstructure Width	2.99 m (9 ft. 10 in.)	
H Cab Height	3.17 m (10 ft. 5 in.)	
I Track Width	700 mm (28 in.) Heavy Duty / 800 mm (32 in.) Heavy Duty	
J Gauge Width	2.59 m (8 ft. 6 in.)	
K Ground Clearance	0.50 m (20 in.)	
L Overall Width with Shoes		
700 mm (28 in.) Heavy Duty	3.29 m (10 ft. 10 in.)	
800 mm (32 in.) Heavy Duty	3.39 m (11 ft. 2 in.)	

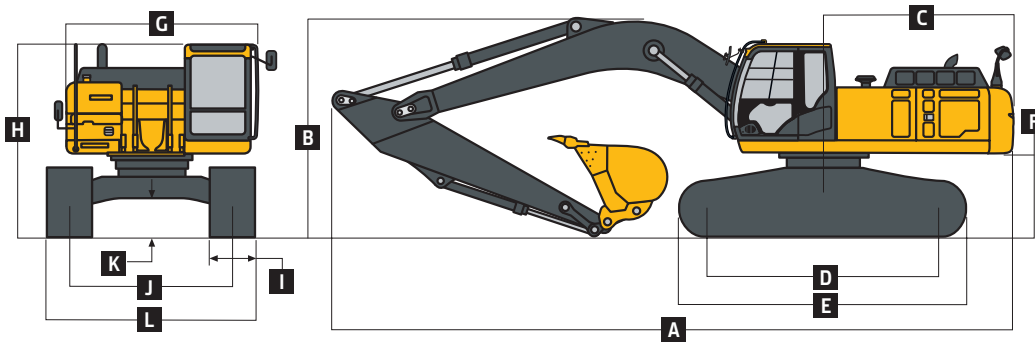

Lift Capacities

Boldface type indicates hydraulically limited capacity; **lightface type** indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 1270-kg (2,800 lb.) bucket and 800-mm (32 in.) Heavy-Duty shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.

Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
<i>With 3.2-m (10 ft. 6 in.) Heavy-Duty arm</i>												
6.0 m (20 ft.)									7806	6710		
									(17,082)	(14,371)		
4.5 m (15 ft.)							9878	9578	8475	6515	6368	4579
							(21,357)	(20,618)	(18,430)	(13,985)		
3.0 m (10 ft.)			16 096	14 063	11 549	8981	9351	6241	7495	4479		
			(34,555)	(30,342)	(24,944)	(19,352)	(20,278)	(13,410)	(16,066)	(9,578)		
1.5 m (5 ft.)			18 594	13 091	12 991	8462	9974	5961	7360	4356		
			(40,102)	(28,200)	(28,079)	(18,225)	(21,440)	(12,817)	(15,795)	(9,329)		
Ground Line			19 348	12 683	13 792	8133	9747	5757	7262	4266		
			(41,891)	(27,271)	(29,848)	(17,503)	(20,953)	(12,380)	(15,602)	(9,152)		
-1.5 m (-5 ft.)			11 896	11 896	18 817	12 614	13 787	8003	9650	5670		
			(27,023)	(27,023)	(40,794)	(27,102)	(29,755)	(17,218)	(20,751)	(12,198)		
-3.0 m (-10 ft.)	14 227	14 227	19 619	19 619	17 190	12 755	12 828	8053	9604	5735		
	(31,928)	(31,928)	(44,624)	(44,624)	(37,195)	(27,413)	(27,670)	(17,335)	(20,489)	(12,369)		
-4.5 m (-15 ft.)			18 938	18 938	14 064	13 113	10 310	8318				
			(40,693)	(40,693)	(30,129)	(28,219)	(21,788)	(17,958)				

Lift Capacities (continued) 380G LC

Boldface type indicates hydraulically limited capacity; lightface type indicates stability-limited capacities, in kg (lb.). All lift capacities are based on ISO 10567 (with power boost). Machine equipped with 1270-kg (2,800 lb.) bucket and 800-mm (32 in.) Heavy-Duty shoes; standard gauge; and situated on firm, uniform supporting surface. Total load includes weight of cables, hook, etc. Figures do not exceed 87 percent of hydraulic capacities or 75 percent of weight needed to tip machine.


Load Point Height	1.5 m (5 ft.)		3.0 m (10 ft.)		4.5 m (15 ft.)		6.0 m (20 ft.)		7.5 m (25 ft.)		9.0 m (30 ft.)	
Horizontal Distance from Centerline of Rotation	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
With 4.0-m (13 ft. 1 in.) arm												
7.5 m (25 ft.)										(14,562)	(14,562)	
6.0 m (20 ft.)										6939	6939	5716 4868
										(15,179)	(14,954)	(11,000) (10,368)
4.5 m (15 ft.)										7721	6752	7114 4789
										(16,795)	(14,497)	(15,557) (10,238)
3.0 m (10 ft.)							14 260	14 260	10 586	9333	8725	6451 7629 4642
							(30,632)	(30,632)	(22,873)	(20,101)	(18,928)	(13,862) (16,451) (9,938)
1.5 m (5 ft.)							17 458	13 633	12 311	8747	9704	6133 7490 4478
							(37,630)	(29,362)	(26,612)	(18,836)	(21,034)	(13,184) (16,079) (9,597)
Ground Line			6730	6730	19 133	12 967	13 503	8322	8322	9874	5875	7341 4342
			(15,403)	(15,403)	(41,379)	(27,888)	(29,220)	(17,910)	(21,222)	(12,630)	(15,767)	(9,311)
-1.5 m (-5 ft.)	6799	6799	10 863	10 863	19 370	12 713	13 946	8095	9704	5722	7261	4268
	(15,210)	(15,210)	(24,660)	(24,660)	(41,953)	(27,321)	(29,966)	(17,412)	(20,858)	(12,303)	(15,610)	(9,166)
-3.0 m (-10 ft.)	11 387	11 387	16 293	16 293	18 425	12 723	13 529	8047	9672	5694		
	(25,561)	(25,561)	(36,911)	(36,911)	(39,871)	(27,341)	(29,232)	(17,314)	(20,804)	(12,255)		
-4.5 m (-15 ft.)	16 888	16 888	22 921	22 921	16 178	12 944	11 969	8177	8663	5840		
	(37,963)	(37,963)	(49,377)	(49,377)	(34,814)	(27,840)	(25,643)	(17,618)	(18,124)	(12,627)		
-6.0 m (-20 ft.)			16 336	16 336	11 807	11 807	7965	7965				
			(34,418)	(34,418)	(24,741)	(24,741)						

Buckets

A full line of buckets is offered to meet a wide variety of applications. Digging forces are with power boost. Buckets are equipped with John Deere Fanggs™ teeth or ESCO teeth standard. Replaceable cutting edges and a variety of teeth are available through John Deere Parts. Optional side cutters add 150 mm (6 in.) to bucket widths. Capacities are SAE heaped ratings.

Type Bucket	Bucket Width		Bucket Capacity		Bucket Weight		Bucket Dig Force		Arm Dig Force 3.2 m (10 ft. 6 in.) Heavy Duty		Arm Dig Force 4.0 m (13 ft. 1 in.)		Bucket Tip Radius		Number of Teeth
	mm	in.	m ³	cu. yd.	kg	lb.	kN	lb.	kN	lb.	kN	lb.	mm	in.	
Heavy Duty Plate Lip	915	36	1.13	1.5	971	2,140	225.2	496	177.6	392	152.6	337	1600	63.0	4
	1065	42	1.34	1.7	1003	2,212	225.2	496	177.6	392	152.6	337	1600	63.0	5
	1220	48	1.55	2.0	1055	2,326	225.2	496	177.6	392	152.6	337	1600	63.0	6
	1372	54	1.76	2.3	1161	2,559	225.2	496	177.6	392	152.6	337	1600	63.0	6
Heavy Duty High Capacity	760	30	0.96	1.3	1142	2,518	204.2	450	171.7	379	148.3	327	1765	69.5	4
	915	36	1.19	1.6	1263	2,783	204.2	450	171.7	379	148.3	327	1765	69.5	4
	1065	42	1.41	1.8	1416	3,123	204.2	450	171.7	379	148.3	327	1765	69.5	5
	1220	48	1.64	2.1	1506	3,321	204.2	450	171.7	379	148.3	327	1765	69.5	6
	1372	54	1.87	2.4	1617	3,565	204.2	450	171.7	379	148.3	327	1765	69.5	6

Bucket Selection Guide*

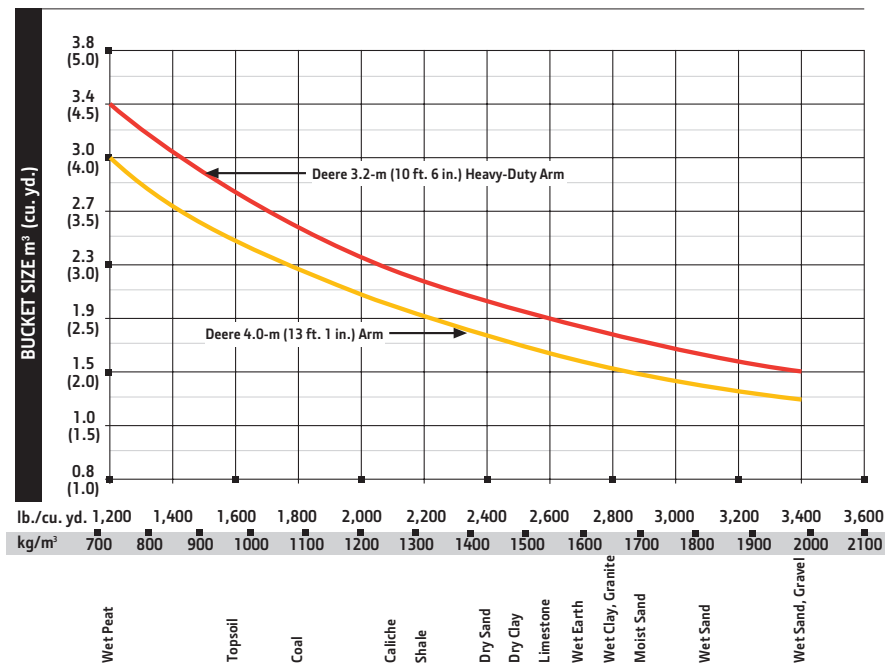

*Contact your John Deere dealer for optimum bucket and attachment selections. These recommendations are for general conditions and average use. Does not include optional equipment such as thumbs or couplers. Larger buckets may be possible when using light materials, for flat and level operations, less compacted materials, and volume loading applications such as mass-excavation applications in ideal conditions. Smaller buckets are recommended for adverse conditions such as off-level applications, rocks, and uneven surfaces. Bucket capacity indicated is SAE heaped.

Additional equipment

Key: ● Standard ▲ Optional or special

See your John Deere dealer for further information.

350G 380G Engine

● ●	Auto-idle system
● ●	Automatic belt-tension device
● ●	Batteries (2 – 12 volt)
● ●	Coolant recovery tank
● ●	Dual-element dry-type air filter
● ●	Electronic engine control
● ●	Enclosed fan guard (conforms to SAE J1308)
● ●	Engine coolant to –37 deg. C (–34 deg. F)
● ●	Programmable auto shutdown
● ●	Fuel filter with water separator
● ●	Full-flow oil filter
● ●	Turbocharger with charge air cooler
● ●	Cool-on-demand hydraulic-driven fan
● ●	500-hour engine-oil-change interval
● ●	70% (35 deg.) off-level capability
● ●	Engine-oil-sampling valve
▲ ▲	Chrome exhaust stack
▲ ▲	Electric ether starting aid
▲ ▲	Hydraulic fan reverser
▲ ▲	Engine coolant heater
▲ ▲	Severe-duty fuel filter

Hydraulic System

● ●	Reduced-drift valve for boom down, arm in
● ●	Auxiliary hydraulic valve section
● ●	Spring-applied, hydraulically released automatic swing brake
● ●	Auxiliary hydraulic-flow adjustments through monitor
● ●	Auto power lift
● ●	5,000-hour hydraulic-oil-change interval
● ●	Hydraulic-oil-sampling valve
▲ ▲	Auxiliary hydraulic lines
▲ ▲	Auxiliary pilot and electric controls
▲ ▲	Hydraulic filter restriction indicator kit
▲ ▲	Load-lowering control / Anti-drift device
▲ ▲	Single-pedal propel control
▲ ▲	Control pattern change valve

Undercarriage

● ●	Planetary drive with axial piston motors
● ●	Propel motor shields
● ●	Spring-applied, hydraulically released automatic propel brake
● ●	Track guides, front idler and 3 additional
● ●	2-speed propel with automatic shift
● ●	Upper carrier rollers (2)
● ●	Sealed and lubricated track chain
● ●	Triple semi-grouser shoes, 600 mm (24 in.)
● ●	Triple semi-grouser shoes, 700 mm (28 in.)

350G 380G Undercarriage (continued)

● ●	Single-bar shoes, 700 mm (28 in.) Heavy Duty
● ●	Triple semi-grouser shoes, 800 mm (32 in.)
● ●	Triple semi-grouser shoes, 800 mm (32 in.) Heavy Duty
▲ ▲	Undercarriage frame opening guard

Upperstructure

● ●	Right-hand, left-hand, and counterweight mirrors
● ●	Vandal locks with ignition key: Cab door / Service doors / Toolbox
● ●	Debris screen in side panel
● ●	Remote-mounted engine oil and fuel filters

Front Attachments

● ●	Centralized lubrication system
● ●	Dirt seals on all bucket pins
● ●	Less boom and arm
● ●	Oil-impregnated bushings
● ●	Reinforced resin thrust plates
● ●	Tungsten carbide thermal coating on arm-to-bucket joint
▲	Arm, 2.66 m (8 ft. 9 in.)
▲	Arm, 3.2 m (10 ft. 6 in.)
▲	Arm, 3.2 m (10 ft. 6 in.) Heavy Duty
▲ ▲	Arm, 4.0 m (13 ft. 1 in.)
▲ ▲	Attachment quick-couplers
▲ ▲	Boom cylinder with plumbing to main-frame for less boom and arm
▲ ▲	Buckets: Heavy duty / Heavy-duty high capacity / Side cutters and teeth
▲ ▲	"D" channel guard
▲ ▲	Material clamps
▲ ▲	Super-long fronts

Operator's Station

● ●	Adjustable independent-control positions (levers-to-seat, seat-to-pedals)
● ●	AM/FM radio
● ●	Auto climate control/air conditioner/heater/pressurizer
● ●	Built-in Operator's Manual storage compartment and manual
● ●	Cell-phone power outlet, 12 volt, 60 watt, 5 amp
● ●	Coat hook
● ●	Deluxe suspension cloth seat with 100-mm (4 in.) adjustable armrests
● ●	Floor mat
● ●	Front windshield wiper with intermittent speeds
● ●	Gauges (illuminated): Engine coolant / Fuel
● ●	Horn, electric
● ●	Hourmeter, electric

350G 380G Operator's Station (continued)

● ●	Hydraulic shut-off lever, all controls
● ●	Hydraulic warm-up control
● ●	Interior light
● ●	Large cup holder
● ●	Machine Information Center (MIC)
● ●	Mode selectors (illuminated): Power modes – 3 / Travel modes – 2 with automatic shift / Work mode – one
● ●	Multifunction, color LCD monitor with: Diagnostic capability / Multiple-language capabilities / Maintenance tracking / Clock / System monitoring with alarm features: Auto-idle indicator, engine air cleaner restriction indicator light, engine check, engine coolant temperature indicator light with audible alarm, engine oil pressure indicator light with audible alarm, low-alternator-charge indicator light, low-fuel indicator light, fault code alert indicator, fuel-rate display, wiper-mode indicator, work-lights-on indicator, and work-mode indicator

● ●	Motion alarm with cancel switch (conforms to SAE J994)
● ●	Power-boost switch on right console lever
● ●	Auxiliary hydraulic control switches in right console lever
● ●	SAE 2-lever control pattern
● ●	Seat belt, 51 mm (2 in.), retractable
● ●	Tinted glass
● ●	Transparent tinted overhead hatch
● ●	Hot/cold beverage compartment
▲ ▲	Air-suspension heated seat
▲ ▲	24- to 12-volt D.C. radio convertors, 10 amp
▲ ▲	Hydraulic oil filter restriction indicator light
▲ ▲	Protection screens for cab front, rear, and side
▲ ▲	Seat belt, 76 mm (3 in.), non-retractable
▲ ▲	Window vandal-protection covers

Electrical

● ●	100-amp alternator
● ●	Blade-type multi-fused circuits
● ●	Positive-terminal battery covers
● ●	JDLink™ wireless communication system (available in specific countries; see your dealer for details)
▲ ▲	Rearview camera
▲ ▲	Cab extension wiring harness

Lights

● ●	Work lights: Halogen / One mounted on boom / One mounted on frame
▲ ▲	2 lights mounted on cab / One mounted on right side of boom

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at test conditions specified per ISO 9249. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on units with 1370-mm (54 in.) buckets, full fuel tanks, and 79-kg (175 lb.) operators; a 350G LC unit with 6928-kg (15,274 lb.) counterweight and 800-mm (32 in.) triple semi-grouser shoes; and a 380G LC unit with 7629-kg (16,819 lb.) counterweight and 800-mm (32 in.) heavy-duty triple semi-grouser shoes.

