






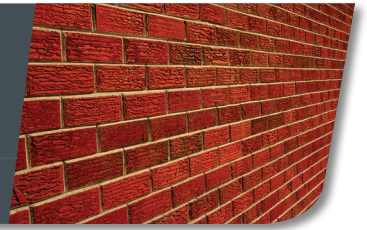


MT 625

MT SERIES CONSTRUCTION/MULTI-PURPOSE telescopic handler




KEY FEATURES



-  5,500 lbs. (2495 kg) Capacity
-  19 ft. 2 in (5.85 m) Lift Height
-  Ideal for Construction Handling
-  Compact and Maneuverable
-  Tier IV-Certified Kubota Diesel Engine
-  Variety of Attachments
-  Enclosed Cab or Canopy

MT 625 CONSTRUCTION/MULTI-PURPOSE TELESCOPIC HANDLER SPECIFICATIONS

		MT 625
	KEY PERFORMANCE	
	Maximum Lift Capacity – 24" Load Center (kg)	5,500 lbs. (2495)
	Maximum Lift Height (m)	19'2" (5.85)
	Capacity at Maximum Lift Height (kg)	4,409 lbs. (2000)
	Maximum Forward Reach (m)	11'1" (3.40)
	Capacity at Maximum Reach (kg)	1,650 lbs. (750)
	Cycle Times – Unloaded	
	Lifting	8.0 sec.
	Lowering	5.4 sec.
	Boom Extension	5.6 sec.
Boom Retraction	4.3 sec.	
	ENGINE	
	Type	Kubota Tier IV
	Power (kW)	74 hp (55.4)
	Displacement (cm ³)	4 cyl. 203 cu. in. (3331)
	Maximum Torque @ 1600 rpm (Nm)	195 ft.lbs. (265)
Injection / Cooling	Direct / Water	
	TRANSMISSION	
	Type	Hydrostatic
	HYDRAULICS	
	Pump Type	Gear
	Pressure (bar)	3454 psi (235)
	CAPACITIES	
	Flow Rate (L/min.)	24 gpm (90)
	SPECIFICATIONS	
	Hydraulic Oil (L)	30.3 gal. (115)
	Fuel Tank (L)	16.6 gal. (63)
	Weight – with Forks (kg)	10,582 lbs. (4800)
	Turning Radius (m)	10'10" (3.31)
	Ground Clearance (mm)	13" (330)
	Overall Length (m)	12'9" (3.88)
	Wheel Base (m)	7'6" (2.30)
	Cab Width (mm)	31" (787)
	Overall Width (mm)	5'11" (1813)
Overall Height (mm)	6'4" (1920)	
Breakout Force (daN)	7,704 lbf. (3427)	
Maximum Drawbar Pull (daN)	7,981 lbf. (3550)	
	TIRES	12-16.5 12PR

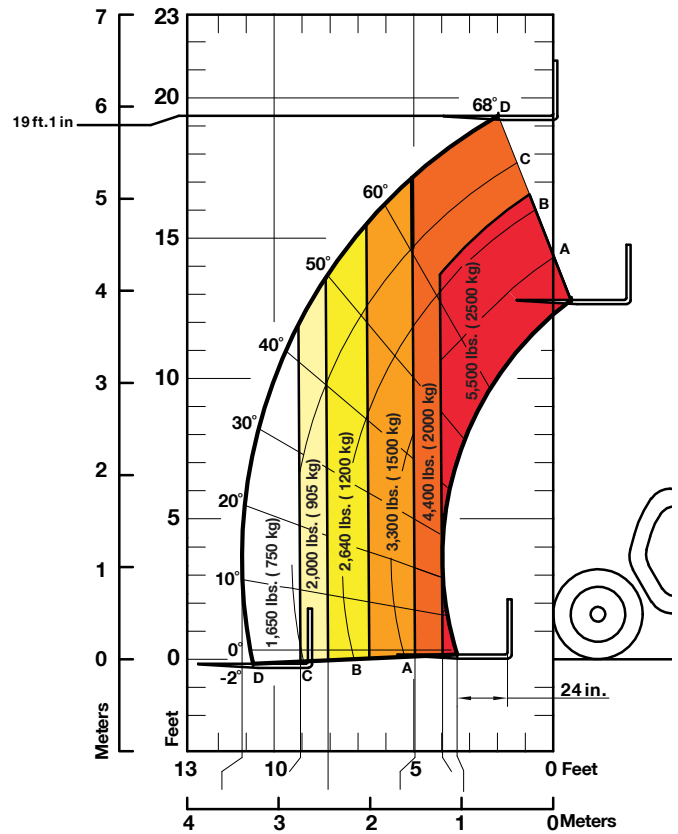

Load Chart based on 24 inch (600 mm) load center per B56.6.

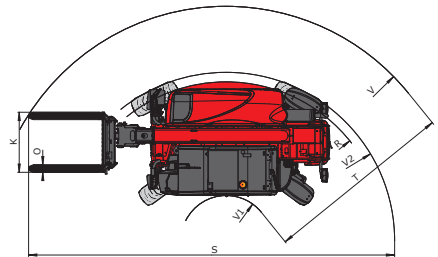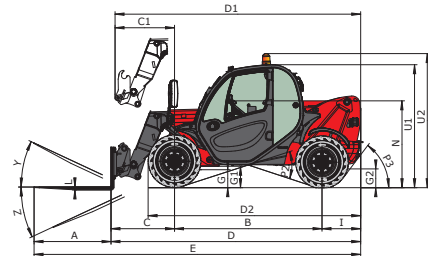

(mm)	D2	I	P3	V1
A 3'11" (1200)	E 10'9" (3275)	J 2' (603)	R 10'4" (3150)	V2 10'10" (3310.5)
B 7'6.5" (2300)	F 16'8.5" (5094)	J 2'7" (797)	S 21'10" (6651.5)	W 5'11" (1813)
C 3'3" (991)	F 4'11" (1492)	K 3'4" (1015)	T 12'11" (3935)	Y 12°
C1 3' (928)	F1 4'11" (1492)	L 2" (45)	U1 6'4" (1920)	Z 117°
D 12'9" (3894)	G 9.4" (240)	N 4'4" (1314)	U2 6'9" (2054)	
D1 12'7" (3831)	G1 1'1" (330)	O 5" (125)	V 15'5" (4700)	
	G2 10" (253)	P2 37°		

This publication in no way constitutes an offer and the company reserves the right to alter specifications without notice.

©2014 Manitou Americas, Inc. Manitou. All rights reserved. Printed in the U.S.A.
A Manitou Group brand.



MANITOU AMERICAS • PO Box 179 • West Bend, WI 53095
Tel: 262-334-9461 • Fax: 262-338-7517 • www.manitou.com